

JR. SOD CUTTER



TRUST RYAN®

The gold- standard in the golf, sports turf, rental and landscape industries for over 75 years, the Jr. Sod Cutter packs the long-lasting durability and dependable performance you expect from RYAN. More user-friendly than ever before, this workhorse embodies our honest commitment to pushing forth innovations that help you get the job done—and done right—for years and years to come.

1. ULTRA-LOW VIBRATION TECHNOLOGY

A rubber isolation mount absorbs shock, cutting energy-draining vibration and saving your arms from giving out.

2. EASY STEER TECHNOLOGY

Unlock the pneumatic rear caster wheel to tightly maneuver with unmatched precision. Going straight? Lock the wheel.

3. USER FRIENDLY OPERATION


A user-friendly control panel makes it easier for anyone to grab, cut, and finish the job.

4. SIMPLE DEPTH AND BLADE-ANGLE ADJUSTMENT

No matter the terrain or soil condition, easily change blade depth and angle for unmatched, precision cutting.



OPTIONAL MOLE BLADE KIT

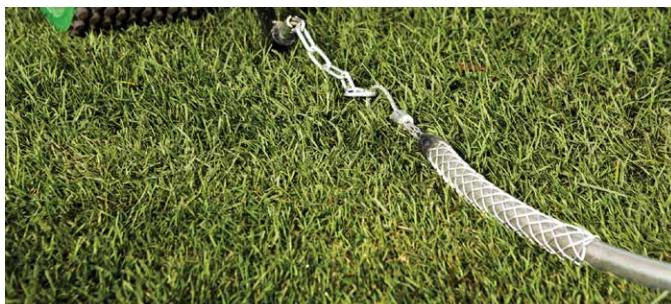

OPTIONAL V-TRENCHER KIT



FOR MORE INFORMATION, VISIT RYANTURF.COM



JR. SOD CUTTER SPECIFICATIONS

HONDA® Engine Model	4-Cycle Honda® GX160; recoil start; on/off switch; low-oil alert
HONDA Displacement	9.9 cu in. (163 cc)
HONDA Fuel Capacity	0.82 gal (3.1 L)
HONDA Oil Capacity	0.61 qt (0.58 L)
BRIGGS & STRATTON® Engine Model	4-cycle Vanguard™ 200 Model 12V3; recoil start; TransportGuard® integrated fuel valve/throttle; low-oil alert
BRIGGS & STRATTON Displacement	9.9 cu in. (163 cc)
BRIGGS & STRATTON Fuel Capacity	0.82 gal (3.1 L)
BRIGGS & STRATTON Oil Capacity	0.61 qt (0.58 L)
Clutch	Spring-loaded belt tightener
Drive	<ul style="list-style-type: none"> • V-belt engine-to-gear case • Double roller chain-to-blade eccentric shaft • Gears and roller chain-to-traction wheels • Transmission has separate dog clutches to engage cutting blade and traction drive
Drive Wheel	(2) 8 in. (203 mm) diameter, knob tread; rubber-vulcanized to cast-iron hubs
Lubrication	Oil splash in gear case; grease fittings elsewhere
Speed	Up to 135 ft/min (41 m/min)
Cutting Width	12 in. (305 mm) or 18 in. (457 mm)
Cutting Thickness	Adjustable up to 2.5 in. (64 mm)
Weight: Wet	12 in. Model: 333 lb (151 kg); 18 in. Model: 373 lb (169 kg)
Width	25 in. (635 mm)
Length	53 in. (1,346 mm)
Height	39.5 in. (1,003 mm)
Tires	Rear: 9" x 3.50"-4 with sealed ball bearings



FOR MORE INFORMATION,
VISIT [RYANTURF.COM](https://www.ryanturf.com)

One Bobcat Lane | Johnson Creek, WI 53038-0469

For more information about RYAN® products, visit your RYAN® dealer today. For the location of the dealer nearest you, call 866-469-1242 or visit www.ryanturf.com.

©2022 Clark Equipment Co. All Rights Reserved.



TRUST RYAN®