

ATTACHMENT CATALOGUE 2025-2026

One Tough Animal















2025/2026 **3**

INTRODUCTION B4501805-EN (01-25)

INTRODUCTION



- 2. Ensure the perfect match with your machine, with the guaranteed best performance
- with the guaranteed best performance.
- **3.** Work harder with stronger components and design to tackle the toughest jobs.
- **4.** Rely on the best dealer support, parts and service.
- **5.** Explore the full potential of your machine with maximum productivity.
- 6. Work all year round to grow your business.
- 7. Operate with peace of mind with a 12-month warranty on every serial-numbered Bobcat attachment.

► CHOOSE THE RIGHT ATTACHMENT AND IMPLEMENT FOR YOUR

- Compact Excavators
- Mini Track Loaders
- Compact Track Loaders
- Skid Steer Loaders
- Small Articulated Loaders
- Compact Wheel Loaders
- Compact Tractors
- Telehandlers
- Rotary Telehandlers
- Backhoe Loaders

Use this guide to find the best Bobcat attachment combinations for your everyday tasks, occasional projects, and seasonal needs.









▶ WELCOME TO THE WONDERFUL WORLD OF BOBCAT ATTACHMENTS

Explore the true versatility of your Bobcat machine using genuine attachments. Bobcat attachments and implements help you grow your business, replace less-efficient machines, and give you the tools to accomplish major projects. Tackle any job with ease and peace of mind: from construction to demolition, forestry to landscaping, and agriculture to snow removal.

▶ WWW.BOBCAT.COM

Please visit www.bobcat.com for more information and to locate the Bobcat dealer closest to you. They will be happy to help you with any inquiries you may have.

4 2025/2026 **5**

TABLE OF CONTENTS

About Us 10 Why Use Bobcat Attachments 12 Contact Us 13 How To Read This Catalogue 15 Selection Instructions 16 Machine Ranges 17 COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57	Introduction	5
Contact Us 13 How To Read This Catalogue 15 Selection Instructions 16 Machine Ranges 17 COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 <	About Us	10
How To Read This Catalogue 15 Selection Instructions 16 Machine Ranges 17 COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic Tilt 48 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 <	Why Use Bobcat Attachments	12
Selection Instructions 16 Machine Ranges 17 COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68	Contact Us	13
Machine Ranges 17 COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68	How To Read This Catalogue	15
COMPACT EXCAVATORS 19 Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Bac	Selection Instructions	16
Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Machine Ranges	17
Bucket Teeth 20 Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72		
Compact Excavator Attachments 21 Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	COMPACT EXCAVATORS	19
Pin Kits 22 Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket Teeth	20
Auger 23 Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Compact Excavator Attachments	21
Breaker 25 Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Pin Kits	22
Bucket, Clay Spade 28 Bucket, Digging, Heavy Duty 30 Bucket, Digging, Standard Duty 32 Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Auger	23
Bucket, Digging, Heavy Duty Bucket, Digging, Standard Duty Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading Bucket, Grading, German Type Bucket, Grading, UK Style Bucket, Grading, UK Style Bucket, Skeleton Bucket, Tilt Coupler, Hydraulic Coupler, Hydraulic Tilt Coupler, Mechanical Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor Supercharger 60 COMPACT LOADERS Angle Broom 68 Auger 69 Backhoe 72	Breaker	25
Bucket, Digging, Standard Duty Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic Coupler, Hydraulic Tilt 48 Coupler, Mechanical Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 44 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS Angle Broom 68 Auger 69 Backhoe 72	Bucket, Clay Spade	28
Bucket, Digging, UK Type 34 Bucket, Digging, German Profile 37 Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Digging, Heavy Duty	30
Bucket, Digging, German Profile Bucket, Grading Bucket, Grading, German Type Bucket, Grading, UK Style Bucket, Skeleton Bucket, Skeleton Bucket, Tilt Coupler, Hydraulic Coupler, Hydraulic Tilt Coupler, Mechanical Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS Angle Broom 68 Auger 69 Backhoe 72	Bucket, Digging, Standard Duty	32
Bucket, Grading 38 Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Digging, UK Type	34
Bucket, Grading, German Type 39 Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Digging, German Profile	37
Bucket, Grading, UK Style 40 Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Grading	38
Bucket, Skeleton 42 Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Grading, German Type	39
Bucket, Tilt 44 Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Grading, UK Style	40
Coupler, Hydraulic 46 Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Skeleton	42
Coupler, Hydraulic Tilt 48 Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Bucket, Tilt	44
Coupler, Mechanical 50 Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Coupler, Hydraulic	46
Coupler, Mechanical Tilt 52 Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Coupler, Hydraulic Tilt	48
Flail Mower, Self-Levelling 54 Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Coupler, Mechanical	50
Hydraulic Clamp 56 Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Coupler, Mechanical Tilt	52
Laser Equipment 57 Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Flail Mower, Self-Levelling	54
Plate Compactor 58 Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Hydraulic Clamp	56
Supercharger 60 COMPACT LOADERS 63 Angle Broom 68 Auger 69 Backhoe 72	Laser Equipment	57
COMPACT LOADERS Angle Broom 68 Auger 69 Backhoe 72	Plate Compactor	58
Angle Broom 68 Auger 69 Backhoe 72	Supercharger	60
Auger 69 Backhoe 72	COMPACT LOADERS	63
Backhoe 72	Angle Broom	68
	Auger	69
Bale Fork 74	Backhoe	72
	Bale Fork	74

Box Blade	75
Box Blade, HD	76
Breaker	77
Brushcat™ Rotary Cutter	79
Bucket, Combination	80
Bucket (CI), Construction / Industrial	81
Bucket, Dirt	83
Bucket, Fertiliser & Grain	84
Bucket (GP), General Purpose	85
Bucket, Load & Carry	86
Bucket (LP), Low Profile	87
Bucket, Skeleton	88
Bucket, Snow & Light Material	89
Bucket, Utility	90
Concrete Mixer	91
Concrete Pump	92
Digger	93
Dozer Blade	94
Dumping Hopper	95
Flail Cutter	96
Forestry Cutter	97
Grader	101
Grapple, Farm – Utility on Bucket	104
Grapple, Farm – Utility on Fork	105
Grapple, Industrial	106
Grapple, Root	107
Landplane	108
Landscape Rake	109
Laser Equipment	110
Log Grapple	113
Mixing Bucket	114
Mower	115
Pallet Forks	116
Pallet Forks, Hydraulic	117
Planer, Self-Levelling	118
Pressure Washer	121
Rear Stabilizers	122
Remote Control	123
Salt & Sand Spreader	125

Sand Cleaner	126
Scarifier	128
Scraper	129
Snow Blade	130
Snow Blower	132
Snow Pusher	135
Snow V-Blade	136
Sod Layer	137
Soil & Asphalt Spreader	138
Soil Conditioner	140
Sonic Tracer	141
Stump Grinder	142
Sweeper	144
Sweeper, HD Open Frame	146
Sweeper, Multipurpose	148
Tiller	150
Tilt-Tatch™	151
Tree Transplanter, Convertible	152
Trencher	154
Utility Fork	156
Utility Frame	157
Vibratory Roller	158
Water Kit	159
Wheel Saw	160
Wood Chipper	163
SMALL ARTICULATED LOADERS	165
Angle Broom	167
Breaker	168
Brushcat™ Rotary Cutter	170
Bucket, Dirt	171
Bucket (GP), General Purpose	172
Bucket, Utility	173
Dumping Hopper	174
Grapple, Farm - Utility on Bucket	175
Grapple, Industrial	176
Grapple, Root	177
Landplane	178
Log Grapple	180

Pallet Forks	181
Snow Blower	182
Snow V-Blade	183
Soil Conditioner	184
Stump Grinder	186
Sweeper	187
Sweeper, Multipurpose	188
Tiller	189
Trencher	190
Utility Fork	191
COMPACT WHEEL LOADERS	193
Angle Broom	194
Auger	195
Bucket, Combination	196
Bucket (GP), General Purpose	197
Bucket, Grapple	198
Bucket, Light Material	199
Mixing Bucket	200
Pallet Forks	201
Pressure Washer	202
Salt & Sand Spreader	203
Snow Blade	204
Snow Blower	205
Snow Pusher	206
Snow V-Blade	207
Soil & Asphalt Spreader	208
Sweeper	209
Sweeper, HD Open Frame	211
Sweeper, Multipurpose	213
COMPACT TRACTORS	217
Backhoe	218
Ballast Box	219
Box Blade	220
Front-End Loader	222
Mower, Finish	224
Mower, Mid-Mount	226
Snow Blower, Rear	227


2025/2026 **7**


TABLE OF CONTENTS (CONTINUED)

Tiller	229
Tine Rake	230
TELEHANDLERS	233
Bobcat Telehandlers – Far-Reaching Versatility	234
Angle Broom	235
Bale Handler with Tines	236
Bale Handler with Tubes	237
Bale Spike	238
Box Blade	239
Brushcat™ Rotary Cutter	240
Bucket, Combination	241
Bucket (CI), Construction / Industrial	242
Bucket, Digging	243
Bucket (GP), General Purpose	245
Bucket, Grapple	246
Bucket, Light Material	249
Bucket, Skeleton	251
Concrete Basket	252
Flail Cutter	253
Fork Grapple, Agricultural	254
Grapple, Farm - Utility on Bucket	255
Grapple, Farm – Utility on Fork	256
Grapple, Industrial	257
Grapple, Root	259
Jib, Crane	260
Jib, Extension	261
Landplane	262
Landscape Rake	263
Man Platform, Extendable Rotating	264
Man Platform, Fixed	265
Man Platform, Rotating	266
Mixing Bucket	268
Pallet Forks, Fixed	269
Pallet Fork, Floating	271
Pallet Forks, Hydraulic	272
Pressure Washer	273
Salt & Sand Spreader	274

Snow Blade	275
Snow Pusher	276
Snow V-Blade	277
Sweeper	278
Sweeper, HD Open Frame	280
Sweeper, Multipurpose	282
Tiller	284
Trencher	285
Winch	286
Winch, Jib	287
ROTARY TELEHANDLERS	289
Bucket, General purpose	291
Bucket, Waste	292
Concrete Basket	293
Jib, Crane	294
Jib, Extension	295
Jib, Extension, with Winch	296
Man Platform, Expandable	297
Man Platform, Expandable, Roofing	298
Man Platform, Fixed, Telescopic	300
Man Platform, Positive / Negative Telescopic	301
Man Platform, Rigid	302
Pallet Forks, Floating	304
Pallet Forks, Rigid	305
Pallet Forks, Rotating	306
Rib Handler	307
Winch	308
BACKHOE LOADERS	311
Breaker	312
Bucket, Combination	313
Bucket, Digging	315
Bucket (GP), General Purpose	316
Pallet Forks	317
Quick-Coupler	318

USEFUL INFORMATION	321
Bobcat Institute	322
Demo Days	325
GENUINE ATTACHMENT PARTS	326
Tools for Hydraulic Breakers	327
Ring Brushes and Gutter Brushes	330
Ring Brushes Materials	332
Road Rehabilitation Tools and Tool Holders	335
Flail Mower Cutting Tool Kits	338
Picture Index	340
Index	348



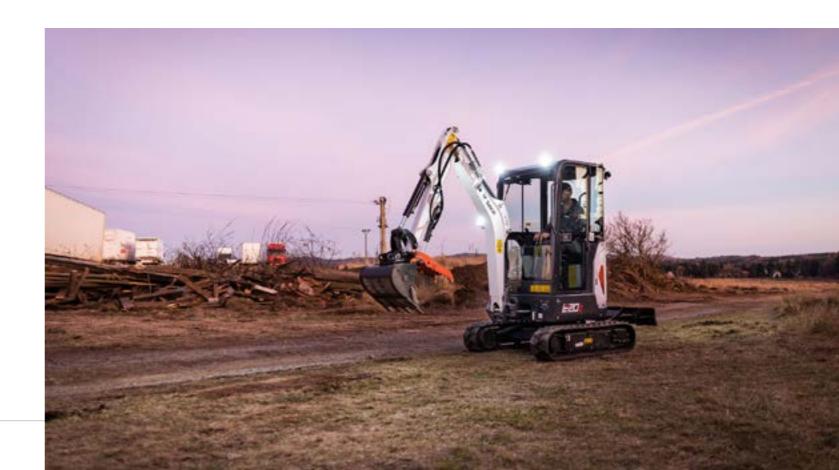

INTRODUCTION B4501805-EN (01-25)

ABOUT US

▶ THE COMPANY: GLOBAL WITH NORTH DAKOTA ROOTS

Bobcat leads the industry in the design, manufacture, marketing and distribution of compact equipment for construction, rental, landscaping, agriculture, grounds maintenance, government, utility, industry and mining. With the addition of Portable power and Material handling equipment to the portfolio our customers can tackle almost any job there is. We strive to empower our customers to do their jobs more efficiently and effectively.

Having started in 1947, our roots are deep in North Dakota, USA. Bobcat Company is the state's largest manufacturer, with 3 North Dakota production facilities. Global Bobcat manufacturing facilities are located in France, Czech Republic, China and Korea, with several parts warehouses across the globe.

Bobcat Company is a subsidiary of Doosan Bobcat Inc., a wholly owned subsidiary of Doosan Infracore Co., Ltd. Bobcat Company entered the EMEA market in the 1960s. Since then, we have continued to invest and expand. Today, we offer a state-of-the-art manufacturing site, an Innovation Centre and a Bobcat Institute in Dobříš (Prague area), Czech Republic.







deper


▶ THE BRAND: BOBCAT – ONE TOUGH ANIMAL

The renowned Bobcat brand – ours since the name was first used in 1962 – is synonymous with durability and dependability. Tough, versatile and inventive Bobcat equipment has rightly earned the nickname "One Tough Animal". Bobcat company continues to be committed to delivering the industry's best compact equipment that empowers you to do more every day.

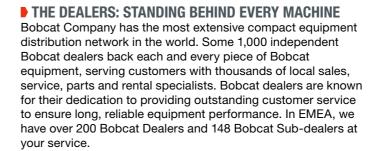

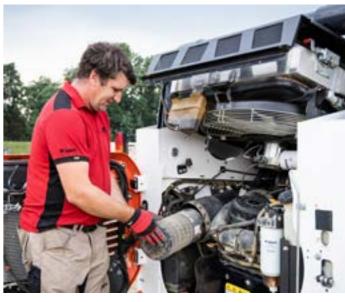







▶ THE BOBCAT INSTITUTE:

FOR THE BEST CUSTOMER EXPERIENCE

Bobcat dealers can rely on professional support from Bobcat product and service specialists. They also benefit from state-of-the-art training facilities with professional demonstrators, trainers and online courses for best practice and knowledge sharing. Most equipment and attachments are available for hands-on training, walk-arounds with experts and live demonstration.

10 2025/2026 **11**

WHY USE BOBCAT ATTACHMENTS

CONTACT US

▶ PEACE OF MIND

When using a Bobcat Attachment, you know it is the best fit for your Bobcat machine.

▶ ENGINEERING APPROVED

Your Bobcat attachment has been optimized for efficiency, performance and greater productivity, resulting in lower operating and maintenance costs. Products are manufactured to the highest standards – guaranteeing the best quality and meeting, or exceeding, local requirements.

ONE-STOP-SHOP

One place for all your attachment needs. Bobcat Company holds a large stock of attachments for immediate shipment worldwide.

SERVIC

Broad coverage via the Bobcat dealer network, backed by Bobcat Service Specialists and Parts warehouses to reduce downtime.

▶ PLUG & PLAY READINESS

Easy to install and operate, with all necessary accessories and implements – from hose kits to special application kits.

WARRANTY

With Bobcat Attachments, you avoid disputes (that may arise from compatibility issues) and operating differences that result from the use of non-approved attachments.



OVER 200 DEALERS IN EUROPE, MIDDLE EAST AND AFRICA AT YOUR SERVICE

Bobcat EMEA HQ, Innovation Center and Factory Bobcat Attachment Department U Kodetky 1810 26312 Dobříš, Czech Republic

2 Bobcat France SA, Telehandler factory
Route de Nantes
44160 Pontchâteau, France

Bobcat Parts Distribution Centers
 a) Germany (Halle)
 b) United Arabe Emirates (Dubai)

4 Bobcat Institute U Kodetky 1811 26312 Dobříš, Czech Republic



VISIT **WWW.BOBCAT.COM** FOR ALL THE LATEST COMPANY INFO. CONTACT YOUR DISTRICT MANAGER FOR MORE DETAILS.



THIS CATALOGUE CONTAINS 8 MAIN CHAPTERS **COVERING EACH BOBCAT MACHINE**

- Compact Excavators
- Compact Loaders
- Small Articulated Loaders
- Compact Wheel Loaders
- Compact Tractors
- Telehandlers
- Rotary Telescopic Handlers
- Backhoe Loaders

Each chapter details the range of attachments suitable per carrier. The attachments are sorted and grouped by families. Please refer to the table of contents, the alphabetical index or the picture index to identify the best attachments for your

Each page covers a specific attachment, with useful information to help you review the requirements, the key features and benefits, technical specifications and machine compatibility. An additional table may include options to run this attachment.

Many attachments have a YouTube logo referring to a video available to see the attachment in action. For the digital Catalogue version, the YouTube logo is dynamic and allows you to open the video link immediately.

Contact your District Manager to discover the best sellers, the "demonstrator favourite" attachments and further guidance. We're here to help you find the best tool for your application!

LEGEND

In this catalogue, these symbols indicate the possible applications for the respective attachment.











& HANDLING

FORESTRY

LANDSCAPING

AGRICULTURE

ROAD WORK







& LEVELING


& RECYCLING

SNOW REMOVAL

INTRODUCTION

SELECTION INSTRUCTIONS

EXAMPLE

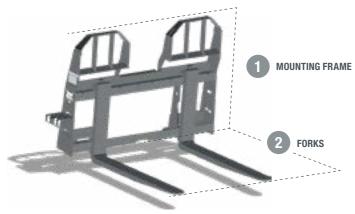

▶ HOW TO READ AND USE THE COMPATIBILITY CHARTS

- Choose 1 reference in each requirement section depending on the machine Example: Machine: S450 (Skid Steer Loader)
- Choose 1 reference in section 1 : 7297499 - Pallet Fork Frame Standard
- Choose 1 reference in section 2: 6540182 - Pallet Fork Teeth 122 cm

Machine selection: Section 1 "Frame" + Section 2 "Forks"

TECHNICAL SPECIFICATIONS										
Description	Part Number	Fork Width (cm)	Frame Weight (kg)	Control Kit Required	Working Flow	First use installation time				
Pallet Fork Frame Standard MT55-S70	6809716.T	10	47	No	Standard	0.25 h				
Pallet Fork Frame Standard Duty	7297499.T	10	60	No	Standard	0.25 h				
Pallet Fork Frame Heavy Duty	7294305.T	10	74	No	Standard	0.25 h				
Pallet Fork Frame Severe Duty	7294332.T	10	120	No	Standard	0.25 h				

CO	MPATIBILITY CHARTS																						
		Part Number	Compact Track Loaders								Skid Steer Loaders												
	Description		MT55	T450	Т590/Н	T66/H	H/9/1	T770/H	T870/H	S70	S100	S450	S510/H	S530/H	S550/H	S570/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S850/H
	Pallet Fork Frame, Standard, MT55-S70	6809716.T	Х*							Х*													
ſ	Pallet Fork Frame Standard Duty	7297499.T		Χ*							Х*	Χ*											
	Pallet Fork Frame Heavy Duty	7294305.T		Χ*	Χ*	Χ*	Χ*					Χ*	Χ*	Х*	Χ*	Х*	Χ*	Χ*	Х*	Х*	Χ*		
	Pallet Fork Severe Duty	7294332.T		Х*	Х*	Х*	Х*	Х*	Х*			Х*	Х*	Х*	Χ*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*
	Pallet Fork Teeth 91 cm, Heavy Duty, Class 2 (Set of 2)	6540184	Х*	Х*	Х*					Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*						
ı	Pallet Fork Teeth 106 cm, Heavy Duty, Class 2 (Set of 2)	6540183		Х*	Х*	Х*	Х*				Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*		
2	Pallet Fork Teeth 122 cm, Heavy Duty, Class 2 (Set of 2)	6540182		Х*	Х*	Х*	Х*				Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*		
	Pallet Fork Teeth 106 cm, Severe Duty, Class 2 (Set of 2)	6541521		Х*	Х*	Х*	Х*	Х*	Х*			Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*
	Pallet Fork Teeth 122 cm, Severe Duty, Class 2 (Set of 2)	6541518		Х*	Х*	Х*	Х*	Х*	Х*			Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*

^{*} Pay attention to the max. pallet fork frame load rating.

MACHINE RANGES



								9						•	5	- 7			
COMPACT EXCAVATO	ORS (MEX	()																	
Previous model	316	316		319 E14		321 322 323 E16		E20	425 E25	325 E26 (M)		331 334 335 E32	430 E35	E45	E50	E55 E62	E80		E55W
Current model	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26(R)	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
COMPACT TRACK LOADERS (CTL)																			
Previous model		MT55		T14	40		T190/	Ή											
Current model		MT100		T4	50		T590/	Ή		T66/H	I		T76/H		T77	0/H		T86/H	/S
SKID STEER LOADER	RS (SSL)																		
Previous model	443 453 463		543 553	743 753 S130	Ş	S150	S175/H	S1	60/H	S205/I	Н		S220/H	S250	/H		S300/	H S	850/H/S
Current model	\$70		S100	S450	S	510/H	S530/H	S5	50/H	S590/I	H S	66/H	S630/H	S650	/H	S76/H	S770/	H 8	86/H/S
SMALL ARTICULATE	D LOADE	RS (SAL)																	
Current model					L23	3									L28				
COMPACT WHEEL LO	DADERS (CWL)																	
Current model			L	.75						L85						L9	5		
COMPACT TRACTOR	S (CT)																		
Current model	CT	1025	CT	2025	(CT2035	(CT2040		CT252	5	CT253	35	CT254	0	CT4	050	CT	1058
TELEHANDLERS (TL	S)																		
Previous model		1	ΓL358/+/	TL36	60	TL470	TL4	170HF			T35105/L	. T361	20SL	T35130S/S	L T35	5140S	T40140	1	Г40180
Current model	TL25.	60	TL26.60/ TL30.60/ TL30.70	TL34.6	5 HF	TL35.70	TL38	3.70 HF	TL43.80		T35.105/ T35.105L		120SL	T35.130S/ T35.130SLI		.140\$	T41.140 SLP	1	40.180 SLP
ROTARY TELEHANDL	.ers (RTL	.S)																	
Previous model	TR5	0.180	TR5	0.210	T	R50.250	TI	R60.210		TR60.2	50	TR60.3	00	TR70.26	60	TR60	.350	TR60	0.390
Current model	TR5	0.180	TR5	0.210	T	R50.250	TI	R60.220		TR60.20	60	TR60.3	10	TR80.27	70	TR80	.350	TR80	0.390

Current model

Backhoe Loaders (BHL)

B730R

Please contact your local Bobcat Distributor / District Manager for compatibility with previous machines. Current attachments may not fit previous models.

B730M

B780

2025/2026 17







COMPACT EXCAVATORS

BUCKET TEETH

COMPATIBILITY CHARTS (AVAILABLE TEETH OPTION) Compact Excavators (B0) 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7242127 7242127 7242127 7308128 System 7299011 7241419 7241419 7241419 7241419 7241419 7241419 German System (B0) 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7242127 7242127 7239328 7239328 7239328 7308344 7308344 7239328 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7292011 (R0)(RO) (B0) (BO) 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299010 7299011 7299010 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 72 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7242127 7242127 7242127 7308128 7308128 7242127 Klac 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 7299011 729 Pin-on


BO: Bolt-on / WO: Weld-on

UK style buckets are equipped with dedicated teeth, available through parts.

BOBCAT COMPANY OFFERS YOU A WIDE RANGE OF EXCAVATOR BUCKETS TO CHOOSE FROM:

- STANDARD AND HEAVY DUTY DIGGING BUCKETS
- CLAY SPADE BUCKETS (ALSO KNOWN AS BANANA BUCKETS)
- **▶** SKELETON BUCKETS (ALSO KNOWN AS RIDDLE BUCKETS)
- **▶** GRADING BUCKETS

It is important to note that all digging and skeleton buckets come with teeth as standard. Teeth kits are also available as option for clay spade buckets. For grading and tilting buckets teeth options are not available.

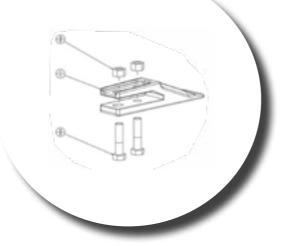

COMPACT EXCAVATOR ATTACHMENTS

Explore the full versatility of your Bobcat Excavator using genuine Bobcat attachments. Choose from a wide range of excavator attachments and couplers to best meet your needs and applications.

For your convenience, Bobcat offers you a wide selection of attachments with pin-on mountings, which can be used with the Bobcat coupler. Or you can opt for the mechanical Klac coupler system or the German system.

▶ PIN-ON SYSTEM

The pin-on system is the standard system of hooking up buckets or other attachments, manually mounted with two pins directly to the excavator arm. This is the most straightforward and economical system to hook up and change attachments.

MECHANICAL PIN GRABBER SYSTEM

Our single visit Bobcat mechanical pin grabber couplers offer you an easy solution to change between pin on attachments, without the need to leave the cab multiple times, thus saving you time and labor.

HYDRAULIC PIN GRABBER SYSTEM

The Bobcat hydraulic couplers offer you a safe, compliant, robust coupler solution allowing you to easily and rapidly do the changeover of pin-on attachments.







▶ KLAC® SYSTEM

Our Klac mechanical quick coupler, with automatic self-locking mechanism, is a dedicated system ensuring a robust and compact solution to change and secure attachments.

GERMAN SYSTEM

The German system coupler is a proven technology allowing you to secure attachments easily and rapidly. It is a preferred system used especially in Germany. Choose from our wide range of German coupler offer, including mechanical, hydraulic and tilting options.





20 2025/2026 **21**

PIN KITS

STANDARD PIN SETS – AVAILABLE FOR COMPACT EXCAVATOR BUCKETS



¹No direct fit - Pin Grabber needed for E88 compatibility

HARDENED PINS** – AVAILABLE FOR ALL COMPACT EXCAVATOR ATTACHMENTS

COMPAT	COMPATIBILITY CHARTS																			
.Eo	莊		Compact Excavators																	
Description	Direct F	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E881	E57W
Pins	Yes	2× 6539737	2× 6539737	2× 6539737	2× 6539737	2× 6539737	2× 6539737	2× 6539737	2× 6539737	2× 7181216	2× 7181216	2× 7181216	2× 7181216	2× 7181216	2× 7143036	2× 7143036	2× 7143036	2× 7015653	2× 7015653	2× 7018644
Retainers	Yes	6× Washer 1EM280 2× Lock Ring 7310871	6 × Washer 1EM280 2 × Lock Ring 7310871	6× Washer 1EM280 2× Lock Ring 7310871	4× Washer 1EM280 2× Lock Ring 7310871	2× Bolt 1CM1075 2× Nut 16DM10	2× Bolt 1CM1075 2× Nut 16DM10	2× Bolt 1CM1075 2× Nut 16DM10	2× Bolt 1CM1075 2× Nut 16DM10	2× Bolt 1CM1075 2× Nut 16DM10	2× Bolt 7CM1290 2× Nut 16DM12	2× Bolt 7CM1290 2× Nut 16DM12	2× Bolt 7CM1290 2× Nut 16DM12	2× Bolt 7CM16130 2× Nut 4DM16	2× Bolt 7CM16130 2× Nut 4DM16	2× Bolt 7CM1290 2× Nut 16DM12				

¹No direct fit - Pin Grabber needed for E88 compatibility









	0	Fixing cap	 A smaller drive housing follow the bit into the h than a standard drive u
	2	Drive Units	 An efficient design and units plenty of torque. Round and combinatio
1	3	Bits	Wide range of auger bi your hole requirements Chases from Hazay Du

- ng allows the entire drive unit to hole, adding 30 cm more dig depth
- nd modified displacement give these

Features & Benefits

- iion shaft augers available. bits widths available to best meet
- Choose from Heavy Duty and Rock Duty bits to adequately penetrate the ground conditions.
- Extra bit extensions are available for increased hole depth.

Auger: Needs Fixing cap + Driving Unit + Bits +

Description: Speed and plumb-line accuracy are what you get with this high-torque, heavy-duty hydraulic auger. Its unique knuckle joint design allows it to hang plumb, even on uneven terrain. The entire drive unit follows the bit into the hole, adding 30 cm more dig depth than a standard unit. Ideal tool for drilling holes for posts, piers, poles and trees in all kinds of soil conditions.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Auger Bit Type	Digging Depth (mm)	Max. Op- erating Pressure (bar)	Torque @ Max. Pressure (Nm)	Max. speed (RPM) @ Max. Rated Flow (I/m)	Delivered with Pin for Auger Bit	Weight (kg)	Control kit re- quired	Working Flow	First Use Instal- Iation Time
High Torque Auger 35PH Drive	7220280	Hex	1829	241	5644 @ 241	98 @ 144	HEX	131	No	Std / HF *	0.5 h
High Torque Auger 50PH Drive	7227984	Hex	1829	241	7175 @ 241	77 @ 144	HEX	131	No	Std / HF *	0.5 h
* Standard / High Flow											

CC	MPATIBILITY CHARTS																				
										C	ompa	ct Exc	avator	s							
	Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
ı	Auger 35PH-50PH Adapter, pin-on	7192817														Χ	Χ	Χ			
ı	Auger 35PH-50PH Adapter, pin-on	7169339																			Х
ı	Auger 35PH-50PH Adapter, pin-on	7322196																	Χ	X ¹	
1	Auger 35PH-50PH Adapter, Klac™ System E	7326842														Χ	Х	Χ			Х
ı	Auger 35PH-50PH Adapter, Klac™ System F	7326841																	Χ	Х	
ı	Auger 35PH-50PH Adapter, QC03	7172956														Χ	Х	Χ			Х
ı	Auger 35PH-50PH Adapter, QC08	7172973																	Χ	Х	
2	High Torque Auger 35PH	7220280														Χ	Χ	Χ	Χ	Х	
2	High Torque Auger 50PH	7227984														Χ	Χ	Χ	Χ	Χ	

¹Pin grabber needed for E88 compatibility

CO	MPATIBILITY CHARTS				
	Description	Part Number	High Torque Auger 35PH	High Torque Auger 50PH	Weight
	High Torque Auger Bit HEX 20 cm HD **	7243233	X	X	47 kg
	High Torque Auger Bit HEX 30 cm HD **	7243234	X	X	53 kg
	High Torque Auger Bit HEX 46 cm HD **	7243235	X	X	68 kg
	High Torque Auger Bit HEX 61 cm HD **	7243236	X	X	83 kg
	High Torque Auger Bit HEX 76 cm HD **	7243237	X	X	123 kg
3	High Torque Auger Bit HEX 91 cm HD **	7243238	X	X	151 kg
3	High Torque Auger Bit HEX 122 cm HD **	7243239	X	X	215 kg
	High Torque Auger Bit HEX 20 cm ROCK **	7243240	X	X	48 kg
	High Torque Auger Bit HEX 30 cm ROCK **	7243241	X	X	54 kg
	High Torque Auger Bit HEX 46 cm ROCK **	7243242	X	X	70 kg
	High Torque Auger Bit HEX 61 cm ROCK **	7243243	X	X	87 kg
	High Torque Auger Bit HEX 76 cm ROCK **	7243244	Х	Х	128 kg

TECHNICAL SPECIFICATIONS				
Description	Colour	Bit Type	Length (mm)	Flight
Auger Bit, Heavy Duty	Orange	Hex Drive	1067	Single
Auger Bit, Rock	White	Hex Shaft	1067	Single

Heavy duty	Rock
(Orange)	(White)

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	Comments
High Torque Auger Extension, 120 cm **	7243729		20 cm bits will not allow the extension to telescope, only works in the top position







	0	Hose Kit
	2	Fixing Cap
-	3	Breaker
T	4	Tool (Optional)

Breaker includes: Nail Point, fixing cap bolts, gauge tool and hose protector. Special Application Kit must be installed on the machine. The cylindrical design improves access to jobs in confined areas, providing accurate attachment operation in more operating environments.

Upper and lower shock absorbers isolate the breaker

Features & Benefits

- Upper and lower shock absorbers isolate the breaker from the housing, reducing noise and vibration to deliver operator comfort without sacrificing performance.
 Silenced standard for all breaker models.
- Diaphragm-type accumulators reduce maintenance by preventing slow leaks.
- preventing slow leaks.

 Long-life breakers designed for all demolition jobs with minimal maintenance.
- The innovative steel ring feature allows retaining the tool bushing, protecting the grease access and provides a quick tool change solution.
- Designed for minimum downtime and with few service parts to reduce operation cost and improve overall lifetime of the attachment.
- Bobcat breakers produce low recoil and minimal hydraulic pressure spike to their carriers.
- Breakers can be mounted on your excavator with various systems: directly to the arm pin onto the arm, with the hydraulic quick coupler or with either of the two mechanical couplers Klac and German Systems.

Description: Bobcat breakers offer high performance, low maintenance, and are easy to use. All breakers feature a frame with a cylindrical design, providing improved access to jobs in confined areas. All breakers have a silenced housing as standard.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Flow (I/min)	Blow Rate - Soft Ground (beats/min)	Blow Rate - Hard Ground (beats/min)	Operating Pressure (bar)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Breaker, HB280	7133202	12 - 23	1120	1290	120	65	No	Standard	2 h
Breaker, HB380	7115922	15 - 30	1400	1600	120	88	No	Standard	2 h
Breaker, HB580	7113418	17 - 35	1220	1350	120	111	No	Standard	2 h
Breaker, HB680	7113419	25 - 50	1220	1340	120	150	No	Standard	2 h
Breaker, HB880	7113420	30 - 65	1150	1310	120	220	No	Standard	2 h
Breaker, HB980	7113421	40 - 75	855 - 1060	1170 - 1450	120	280	No	Standard	2 h
Breaker, HB1180	7115923	55 - 100	680 - 1070	820 - 1280	125	372	No	Standard	2 h
Breaker, HB1380	7157576	70 - 120	780 - 1030	900 - 1230	125	385	No	Standard	2 h
Breaker, HB2380	7133203	75 - 125	690	910	130	405	No	Standard	2 h

COMPATIBILITY CHARTS																				
									C	ompa	ct Exc	avatoı	rs							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Hose Kit for Breaker HB280 for E08/E10z/E10e	7170566	Χ	Χ	Χ																
Hose Kit for Breaker HB380, HB580 for E17/E17z/ E19/E19e/E20z	7191372				Х	Х	Х	Х	Х											
Hose Kit for Breaker HB680 for E26/E27/E27z STD Arm	7117823									Χ	Χ	Χ								
Hose Kit for Breaker HB680 for E26/E27/E27z Long Arm	7117832									Χ	Χ	Χ								
Hose Kit for Breakers HB880 andHB980 for E34/ E35z STD Arm	6728963												Х	Х						
Hose Kit for Breakers HB880, HB980, and HB1180 for E34/E35z Long Arm	7180019												Х	Х						
Hose Kit for Breakers HB1180 and HB1380 for E57W STD Arm	7175243																Χ			Х
Hose Kit for Breakers HB980, HB1180 and HB1380 for E50z/E55z/E60 All Arm Options, and E57W Long Arm	7175244														Х	Х	X			Х
Hose Kit for Breakers HB1180, HB1380, and HB2380 for E85/E88 STD Arm	7176607																	Χ	Χ	
Hose Kit for Breakers HB1180, HB1380, and HB2380 for E85/E88 Long Arm	7176608																	Χ	Χ	

CO	MPATIBILITY CHARTS																				
										C	compa	ct Exc	avatoı	s							
	Description	Part Number	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
	Fixing Cap, HB280, Pin-On	7326811	Χ	Χ	Χ																
	Fixing Cap, HB380, HB580, Pin-On	7326812				Х	Х	Χ	Χ	Χ											
	Fixing Cap, HB380, HB580, Klac™ System C	7326848				Χ	Χ	Χ	Χ	Χ											
	Fixing Cap, HB380, HB580, German System QC01	7326808				Х	Х	Χ	Χ	Х											
	Fixing Cap, HB680, Pin-On	7198350									Χ	Χ	Χ								
	Fixing Cap, HB680, Klac™ System D	7326847									Х	Χ	Χ								
	Fixing Cap, HB680, German System QC03	7198351									Χ	Χ	Χ								
	Fixing Cap, HB880, HB980, Pin-On	7180227												Χ	Χ						
	Fixing Cap, HB880, HB980, Klac™ System D	7326810												Χ	Χ						
	Fixing Cap, HB880, HB980, German System QC03	7172892												Χ	Χ	Х	Х				Χ
2	Fixing Cap, HB980, Pin-On	7192796														Χ	Χ				
	Fixing Cap, HB980, Klac™ System E	7326846														Х	Х				Χ
	Fixing Cap, HB980, Pin-On	7467267																			Χ
	Fixing Cap, HB1180, HB1380, Pin-On	7192814														Х	Х	Χ			
	Fixing Cap, HB1180, HB1380, Pin-On	7168503																			Χ
	Fixing Cap, HB1180, HB1380, Klac™ System E	7326844														Х	Х	Х			Χ
	Fixing Cap, HB1180, HB1380, German System QC03	7171108														Χ	Χ	Χ			Χ
	Fixing Cap, HB1180, HB1380, HB2380, Pin-On	7322199																	Х	X ¹	
	Fixing Cap, HB1180, HB1380, HB2380, Klac™ System F	7326843																	Х	Х	
	Fixing Cap, HB1180, HB1380, HB2380, German System QC08	7172893																	Х	Х	
	Breaker, HB280	7133202	Χ	Χ	Χ																
	Breaker, HB380	7115922				Х	Х	Χ	Χ	Х											
	Breaker, HB580	7113418				Χ	Χ	Χ	Χ	Χ											
	Breaker, HB680	7113419									Χ	Χ	Χ								
3	Breaker, HB880	7113420												Χ	Χ						
	Breaker, HB980	7113421												Χ	Χ	Х	Х				Χ
	Breaker, HB1180	7115923														Χ	Χ	Χ	Χ	Χ	Χ
	Breaker, HB1380	7157576																Х	Х	Х	
	Breaker, HB2380	7133203																	Χ	Χ	
¹Pi	n grabber needed for E88 compatibility																				


¹Pin grabber needed for E88 compatibility

Special application kit must be installed on the machine. **



BOBCAT OFFERS A SELECTION OF BREAKER TOOLS, EQUIPPING YOU WITH THE RIGHT TOOL FOR EACH JOB. SELECT THE RIGHT TOOL FOR THE RIGHT TYPE OF ROCK, CONCRETE, ASPHALT YOU NEED TO BREAK



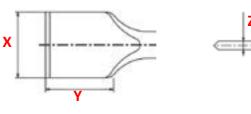




OPTIONS/ACCESSORIES										
Description	Tools Selection	HB280	HB380	HB580	HB680	HB880	НВ980	HB1180	HB1380	НВ2380
InLine Wide Chisel **	Α	n/a	7144660	7144668	7144678	7144693	7144704	7144715	7163372	7144725
Nail Point **	В	7144651	7144655	7144665	7149302	7144690	7144701	7144712	7163369	7144722
CrossCut Asphalt Chisel **	С	n/a	7144657	7144669	7144679	7144694	7144705	7144716	7163373	7144726
InLine Chisel **	D	7144650	7144654	7144664	7144674	7144689	7144700	7144711	7163368	7144721
Blunt Point **	E	7144652	7144661	7144671	7144681	7144696	7144707	7144718	7163375	7144728
Tamping Pad and Tool **	F	n/a	7144662	7144672	7144682	7144697	7144708	7144719	n/a	n/a
CrossCut Chisel **	G	7144649	7144653	7144663	7144673	7144688	7144699	7144710	7163367	7144720
Conical Point **	Н	n/a	n/a	7144666	7144676	7144691	7144702	7144713	7163370	7144723
CrossCut Wide Chisel **	1	n/a	7144659	7144667	7144677	7144692	7144703	7144714	7163371	7144724
InLine Asphalt Chisel **	J	n/a	7144658	7144670	7144680	7144695	7144706	7144717	7163374	7144727


OPTIONS/ACCESSORIES											
Description	Dimension	Tools Selection	HB280	HB380	HB580	HB680	НВ880	НВ980	HB1180	HB1380	HB2380
In-Line Wide Chisel	X × Y × Z (mm)	А	n/a	120×30×4	140×40×6	140×40×6	150×50×7	180×60×9	150×50×7	180×60×9	200×70 ×10
Nail Point	(° Angle)	В	30	30	30	30	30	30	30	30	30
CrossCut Asphalt Chisel	$X \times Y \times Z$ (mm)	С	n/a	100×100 ×14	115×120 ×15	115×120 ×15	130×130 ×17	200×180 ×22	160×140 ×17	180×150 ×18	200×180 ×22
In-Line Chisel	(° Angle)	D	30	30	30	30	30	30	30	30	30
Blunt Point	(Ø in mm)	Е	37	45	47	55	65	72	77	85	95
Tamping Pad and Tool	(mm)	F	n/a	200×200	200×200	200×200	200×200	200×200	200×200	n/a	n/a
CrossCut Chisel	(mm)	G	37	45	47	55	65	72	77	85	95
Conical Point	(° Angle)	Н	n/a	n/a	27	30	30	30	30	30	30
CrossCut Wide Chisel	$X \times Y \times Z$ (mm)	I	n/a	120×30×4	140×40×6	140×40×6	150×50×7	180×60×9	150×50×7	180×60×9	200 × 70 × 10
In-Line Asphalt Chisel	$\begin{array}{c} X\times Y\times Z\\ \text{(mm)} \end{array}$	J	n/a	100×100 ×14	115×120 ×15	115×120 ×15	130×130 ×17	200×180 ×22	160×140 ×17	180×150 ×18	200×180 ×22

COMPACT EXCAVATORS

BUCKET, CLAY SPADE

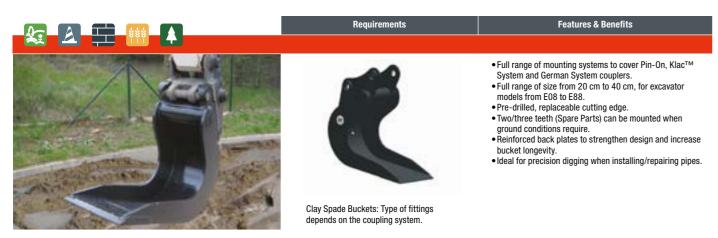

Description: Ideal for precision digging when installing or repairing pipes. Useful for digging narrow trenches, in wet or sticky ground conditions. Easy to mount and use, the clay spade buckets are available in three versions for use with Pin-On, KlacTM and German systems.

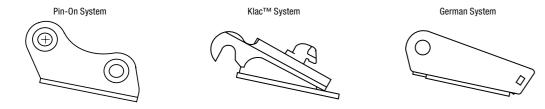

			Γ							Coi	mpad	ct Ex	cava	tors							
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E82	E88	E57W
Clay Spade Bucket, 20 cm, Pin-On, E08/E10z/E10e	7194269.P	15	Χ	Χ	Χ																
Clay Spade Bucket, 22 cm, Pin-On, E17/E17z/E19/E19e/E20z	7196138.P	25				Χ	Χ	Χ	Χ	Χ											
Clay Spade Bucket, 25 cm, Pin-On, E17/E17z/E19/E19e/E20z	7195633.P	26.5				X	Χ	Χ	Χ	Χ											
Clay Spade Bucket, 30 cm, Pin-On, E17/E17z/E19/E19e/E20z	7195641.P	28.5				Χ	Χ	Χ	Χ	Χ											
Clay Spade Bucket, 25 cm, Pin-On, E26/E27/E27z	7195651.PE2	35.5									Χ	Χ	Χ								
Clay Spade Bucket, 30 cm, Pin-On, E26/E27/E27z	7195659.PE2	38.5									X	Χ	Χ								
Clay Spade Bucket, 25 cm, Pin-On, E34/E35z	7195717.PE3	47.8												Χ	Χ						
Clay Spade Bucket, 35 cm, Pin-On, E34/E35z	7195731.PE3	54.8												Χ	Χ						
Clay Spade Bucket, 30 cm, Pin-On, E50z/E55z/E60	7196100.PE4	82														Χ	Χ	Χ			
Clay Spade Bucket, 40 cm, Pin-On, E50z/E55z/E60	7196117.PE4	92														Х	Χ	χ			
Clay Spade Bucket, 30 cm, Pin-On, E57W	7196100.PDH	82																			Х
Clay Spade Bucket, 40 cm, Pin-On, E57W	7196117.PDH	92																			Х
Clay Spade Bucket, 40 cm, Pin-On, E85/E88	7196135.P	118.5																	Χ	X ¹	

¹Pin grabber needed for E88 compatibility

		l								Coi	mpac	t Exc	cavat	tors						
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88
Clay Spade Bucket, 22 cm, Klac™ System C, E17/E17z/E19/E19e/E20z	7196138.K	23				Χ	Х	Χ	Χ	Χ										
Clay Spade Bucket, 25 cm, Klac™ System C, E17/E17z/E19/E19e/E20z	7195633.K	27.5				Χ	Χ	Χ	χ	Χ										
Clay Spade Bucket, 30 cm, Klac™ System C, E17/E17z/E19/E19e/E20z	7195641.K	29.8				Χ	Χ	Χ	Χ	Χ										
Clay Spade Bucket, 25 cm, Klac™ System D, E26/E27/E27z	7195651.K	38									Χ	Χ	Χ							
Clay Spade Bucket, 30 cm, Klac™ System D, E26/E27/E27z	7195659.K	41									Χ	Χ	Χ							
Clay Spade Bucket, 25 cm, Klac™ System D, E34, E35z	7195717.K	50												Χ	Χ					
lay Spade Bucket, 35 cm, Klac™ System D, E34, E35z	7195731.K	57												Χ	Χ					
lay Spade Bucket, 30 cm, Klac™ System E, E50z/E55z/E60/E57W	7196100.K	79														Χ	Χ	Х		
lay Spade Bucket, 40 cm, Klac™ System E, E50z/E55z/E60/E57W	7196117.K	89														χ	Χ	Χ		
lay Spade Bucket, 40 cm, Klac™ System F, E85/E88	7196135.K	123																	Χ	Х
lay Spade Bucket, 22 cm, German System QC01, E17/E17z/E19/E19e/E20z	7196138.L	23				Χ	Χ	Χ	Χ	Χ										
lay Spade Bucket, 25 cm, German System QC01, E17/E17z/E19/E19e/E20z	7195633.L	30.3				Х	Χ	Χ	Χ	Χ										
lay Spade Bucket, 30 cm, German System QC01, E17/E17z/E19/E19e/E20z	7195641.L	32.5				Χ	Χ	Χ	Χ	Χ										
lay Spade Bucket, 25 cm, German System QC03, E26/E27/E27z	7195651.L	38									Χ	Χ	Χ							
lay Spade Bucket, 30 cm, German System QC03, E26/E27/E27z	7195659.L	41									Χ	Χ	Χ							
lay Spade Bucket, 25 cm, German System QC03, E34/E35z	7195717.L	50.8												Χ	Χ					
lay Spade Bucket, 35 cm, German System QC03, E34/E35z	7195731.L	57.5												Χ	Χ					
lay Spade Bucket, 30 cm, German System QC03, E50z/E55z/E60/ 57W	7196100.L	79.5														Х	Х	Х		
lay Spade Bucket, 40 cm, German System QC03, E50z/E55z/E60/ 57W	7196117.L	89.5														X	X	Χ		
Clay Spade Bucket, 40 cm, German System QC08, E85/E88	7196135.L	127																	Χ	Х

BUCKET, DIGGING, HEAVY DUTY






equirements Features & Benefits


- Bolt-on teeth: Easily replace worn out teeth and utilise different styles of teeth (except E85: weld-on teeth)
- Optimised shape for maximum efficiency.
- Reinforced weld-on side cutter: Adds strength, durability and wear to the bucket sides; most beneficial in abrasive or rocky soils.
- or rocky soils.

 Vertical wear bars/straps: Improve strength and durability while providing extra wear protection.

Buckets: Type of fittings depends on the coupling system.

Description: Tackle the toughest digging and material handling jobs with our robust digging buckets. They offer excellent breakout force for digging and easier bucket filling.





											Con	npac	t Exc	avai	tors						
Description	Part	Weight	Capacity		 		Γ	Ι	Γ		Π	Ė								\neg	
	Number	(kg)	(1)	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E82	E88 E57W
Digging Bucket, HD, 30 cm, Pin-On, E17/E17z/E19/E19e/E20z	7158364.P	35	25				Х	Х	Х	Χ	Х										
Digging Bucket, HD, 40 cm, Pin-On, E17/E17z/E19/E19e/E20z	7158370.P	42	36				Х	Χ	Χ	Χ	Χ										
Digging Bucket, HD, 50 cm, Pin-On, E17/E17z/E19/E19e/E20z	7158379.P	48	47				Χ	Χ	Χ	Χ	Χ										
Digging Bucket, HD, 60 cm, Pin-On, E17/E17z/E19/E19e/E20z	7158382.P	55	58				Χ	Χ	Χ	X	Χ										
Digging Bucket, HD, 30 cm, Pin-On, E26/E27/E27z	7158485.PE2	51	35									Χ	Χ	Χ							
Digging Bucket, HD, 40 cm, Pin-On, E26/E27/E27z	7158489.PE2	61	52									Χ	Χ	Χ							
Digging Bucket, HD, 50 cm, Pin-On, E26/E27/E27z	7158496.PE2	69	69									Χ	Χ	Χ							
Digging Bucket, HD, 60 cm, Pin-On, E26/E27/E27z	7158499.PE2	78	86									Χ	Χ	Χ							
Digging Bucket, HD, 30 cm, Pin-On, E34/E35z	7235042.PE3	59	40												Χ	Χ					
Digging Bucket, HD, 40 cm, Pin-On, E34/E35z	7235054.PE3	69	60												Χ	Χ					
Digging Bucket, HD, 50 cm, Pin-On, E34/E35z	7235058.PE3	78	80												Χ	Χ					
Digging Bucket, HD, 60 cm, Pin-On, E34/E35z	7235060.PE3	89	100												Χ	Χ					
Digging Bucket, HD, 70 cm, Pin-On, E34/E35z	7235062.PE3	100	120												Χ	Χ					
Digging Bucket, HD, 80 cm, Pin-On, E34/E35z	7235064.PE3	109	140												χ	Χ					
Digging Bucket, HD, 30 cm, Pin-On, E50z/E55z/E60	7158787.PE4	84	62														Χ	Χ	Х		
Digging Bucket, HD, 40 cm, Pin-On, E50z/E55z/E60	7158793.PE4	101	92														Χ	Χ	Х		
Digging Bucket, HD, 50 cm, Pin-On, E50z/E55z/E60	7158802.PE4	113	122														Χ	Χ	Χ		
Digging Bucket, HD, 60 cm, Pin-On, E50z/E55z/E60	7158805.PE4	130	155														Χ	Χ	Х		
Digging Bucket, HD, 70 cm, Pin-On, E50z/E55z/E60	7158808.PE4	146	183														Χ	Χ	Х		
Digging Bucket, HD, 80 cm, Pin-On, E50z/E55z/E60	7158817.PE4	159	214														Χ	χ	Х		

											Con	npac	t Exc	avai	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging Bucket, HD, 30 cm, Pin-On, E57W	7158787.PDH	84	62																			Χ
Digging Bucket, HD, 60 cm, Pin-On, E57W	7158805.PDH	130	155																			Χ
Digging Bucket, HD, 90 cm, Pin-On, E57W	7158820.PDH	175	245																			Χ
Digging Bucket, HD, 40 cm, Pin-On, E85/E88	7172031.PDH	176	147																	Χ	X^1	
Digging Bucket, HD, 50 cm, Pin-On, E85/E88	7172034.PDH	200	197																	Χ	X^1	
Digging Bucket, HD, 60 cm, Pin-On, E85/E88	7172040.PDH	222	249																	Χ	X ¹	
Digging Bucket, HD, 80 cm, Pin-On, E85/E88	7172049.PDH	264	354																	Χ	X^1	
Digging Bucket, HD, 90 cm, Pin-On, E85/E88	7172052.PDH	283	408																	Χ	X ¹	
Digging Bucket, HD, 100 cm, Pin-On, E85/E88	7172058.PDH	306	461																	Χ	X^1	
Digging Bucket, HD, 30 cm, Klac TM System C, E17/E17z/E19/E19e/E20z	7158364.K	35	25				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, HD, 40 cm, Klac [™] System C, E17/E17z/E19/E19e/E20z	7158370.K	42	36				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, HD, 50 cm, Klac™ System C, E17/E17z/E19/E19e/E20z	7158379.K	48	47				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, HD, 60 cm, Klac [™] System C, E17/E17z/E19/E19e/E20z	7158382.K	55	58				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, HD, 30 cm, Klac™ System D, E26/E27/E27z	7158485.K	51	35									Χ	Χ	Χ								
Digging Bucket, HD, 40 cm, Klac™ System D, E26/E27/E27z	7158489.K	61	52									Χ	Χ	Χ								
Digging Bucket, HD, 50 cm, Klac [™] System D, E26/E27/E27z	7158496.K	69	69									Χ	Χ	Χ								
Digging Bucket, HD, 60 cm, Klac [™] System D, E26/E27/E27z	7158499.K	78	86									Χ	Χ	Χ								
Digging Bucket, HD, 30 cm, Klac™ System D, E34/E35z	7235042.K	59	40												Χ	X						
Digging Bucket, HD, 40 cm, Klac™ System D, E34/E35z	7235054.K	69	60												Χ	X						
Digging Bucket, HD, 50 cm, Klac™ System D, E34/E35z	7235058.K	78	80												Χ	X						
Digging Bucket, HD, 60 cm, Klac™ System D, E34/E35z	7235060.K	89	100												Χ	X						
Digging Bucket, HD, 80 cm, Klac™ System D, E34/E35z	7235064.K	109	140												Χ	Χ						
Digging Bucket, HD, 30 cm, Klac™ System E, E50z/E55z/E60/E57W	7158787.K	84	62														Х	Χ	X			Х
Digging Bucket, HD, 40 cm, Klac™ System E, E50z/E55z/E60/E57W	7158793.K	101	92														X	Χ	X			Х
Digging Bucket, HD, 50 cm, Klac™ System E, E50z/E55z/E60/E57W	7158802.K	113	122														Χ	Χ	Χ			X
Digging Bucket, HD, 60 cm, Klac™ System E, E50z/E55z/E60/E57W	7158805.K	130	155														X	X	X			Χ
Digging Bucket, HD, 70 cm, Klac™ System E, E50z/E55z/E60/E57W	7158808.K	146	183														Χ	X	Χ			Χ
Digging Bucket, HD, 80 cm, Klac™ System E, E50z/E55z/E60/E57W	7158817.K	159	214														Χ	Χ	X			Χ
Digging Bucket, HD, 40 cm, Klac™ System F, E85/E88	7172031.K	176	147																	Χ	Χ	
Digging Bucket, HD, 50 cm, Klac™ System F, E85/E88	7172034.K	200	197																	Χ	Χ	
Digging Bucket, HD, 60 cm, Klac™ System F, E85/E88	7172040.K	222	249																	Χ	Χ	
Digging Bucket, HD, 80 cm, Klac™ System F, E85/E88	7172049.K	264	354																	Χ	Χ	
Digging Bucket, HD, 90 cm, Klac™ System F, E85/E88	7172052.K	283	408																	Χ	Χ	
Digging Bucket, HD, 100 cm, Klac™ System F, E85/E88	7172058.K	306	461																	Χ	Χ	

¹Pin grabber needed for E88 compatibility

30

BUCKET, DIGGING, STANDARD DUTY





Features & Benefits


Wide range of digging buckets for digging, loading, trenching, levelling, backfilling and landscaping.


- Buckets come with a large selection of widths to best suit
- Bolt-on teeth: easily replace worn out teeth and utilize different styles of teeth.

 • Optimised shape for maximum efficiency and capacity.

Buckets: Type of fittings depends on the coupling system.

Description: Tackle the toughest digging and material handling jobs with our robust digging buckets. They offer excellent breakout force for digging and easier bucket filling.





TECHNICAL SPECIFICATIONS / COMPATIBILITY CHART	S																					
											Coi	mpac	t Exc	cava	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging Bucket, STD, 20 cm, Pin-On, E08/E10z/E10e	7208128	15	7.0	Χ	Χ	Χ																
Digging Bucket, STD, 25 cm, Pin-On, E08/E10z/E10e	7208129	17	9.8	Χ	Χ	Χ																
Digging Bucket, STD, 30 cm, Pin-On, E08/E10z/E10e	7208130	21	13	Χ	Χ	Χ																
Digging Bucket, STD, 40 cm, Pin-On, E08/E10z/E10e	7208131	24	19	Χ	Χ	Χ																
Digging Bucket, STD, 20 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141515	25	11				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, STD, 23 cm, Pin-On, E17/E17z/E19/E19e/E20z	7150075	26	13				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 25 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141516	27	15				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, STD, 30 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141517	30	20				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 40 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141518	35	29				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, STD, 45 cm, Pin-On, E17/E17z/E19/E19e/E20z	7150076	42	34				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 50 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141519	47	39				Χ	Χ	Χ	Χ	Χ											
Digging Bucket, STD, 60 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141520	49	49				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 25 cm, Pin-On, E26/E27/E27z	7197063	35	19									Χ	Χ	Χ								
Digging Bucket, STD, 30 cm, Pin-On, E26/E27/E27z	7197064	38	25									Χ	Χ	Χ								
Digging Bucket, STD, 40 cm, Pin-On, E26/E27/E27z	7197065	47	38									Χ	Χ	Χ								
Digging Bucket, STD, 50 cm, Pin-On, E26/E27/E27z	7197067	53	51									Χ	Χ	Χ								
Digging Bucket, STD, 60 cm, Pin-On, E26/E27/E27z	7197068	60	64									Χ	Χ	Χ								
Digging Bucket, STD, 70 cm, Pin-On, E26/E27/E27z	7197069	68	78									Χ	Χ	Χ								
Digging Bucket, STD, 23 cm, Pin-On, E34/E35z	7180754	40	21												Χ	Χ						
Digging Bucket, STD, 30 cm, Pin-On, E34/E35z	7180756	45	32												Χ	Χ						
Digging Bucket, STD, 40 cm, Pin-On, E34/E35z	7180757	54	48												Χ	Χ						
Digging Bucket, STD, 45 cm, Pin-On, E34/E35z	7180758	58	56												Χ	Χ						
Digging Bucket, STD, 50 cm, Pin-On, E34/E35z	7180759	61	65												Χ	Χ						
Digging Bucket, STD, 60 cm, Pin-On, E34/E35z	7180760	67	82												Χ	Χ						
Digging Bucket, STD, 70 cm, Pin-On, E34/E35z	7180761	77	100												Χ	Χ						

											Coi	npac	t Exc	cava	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging Bucket, STD, 80 cm, Pin-On, E34/E35z	7180762	84	117												Χ	Χ						
Digging Bucket, STD, 30 cm, Pin-On, E50z/E55z/E60	7189743	72	48														Χ	Χ	Χ			
Digging Bucket, STD, 40 cm, Pin-On, E50z/E55z/E60	7189744	86	71														Χ	Χ	Χ			
Digging Bucket, STD, 50 cm, Pin-On, E50z/E55z/E60	7189746	98	96														Χ	Χ	Χ			
Digging Bucket, STD, 60 cm, Pin-On, E50z/E55z/E60	7189747	116	122														Χ	Χ	Χ			
Digging Bucket, STD, 70 cm, Pin-On, E50z/E55z/E60	7189748	127	148														Χ	Χ	Χ			
Digging Bucket, STD, 80 cm, Pin-On, E50z/E55z/E60	7189749	140	174														Χ	Χ	Χ			
Digging Bucket, STD, 90 cm, Pin-On, E50z/E55z/E60	7189750	153	200														Χ	Χ	Χ			
Digging Bucket, STD, 100 cm, Pin-On, E50z/E55z/E60	7189751	166	226														Χ	Χ	Χ			
Digging Bucket, STD, 20 cm, Klac™ System C, E17/E17z/ E19/E20z	7138621	25	11				Х	Х	Х	Χ	Х											
Digging Bucket, STD, 23 cm, Klac™ System C, E17/E17z/ E19/E20z	7150064	26	13				X	X	Χ	Χ	Χ											
Digging Bucket, STD, 25 cm, Klac [™] System C, E17/E17z/ E19/E20z	7138622	27	15				Χ	Х	Х	χ	Χ											
Digging Bucket, STD, 30 cm, Klac™ System C, E17/E17z/ E19/E20z	7138623	30	20				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 40 cm, Klac [™] System C, E17/E17z/ E19/E20z	7138624	35	29				Χ	Х	Χ	Χ	Χ											
Digging Bucket, STD, 45 cm, Klac™ System C, E17/E17z/ E19/E20z	7150065	39	34				Χ	X	Χ	Χ	Χ											
Digging Bucket, STD, 50 cm, Klac™ System C, E17/E17z/ E19/E20z	7138625	42	39				Х	Х	Х	Χ	Χ											
Digging Bucket, STD, 60 cm, Klac™ System C, E17/E17z/ E19/E20z	7138626	47	49				Χ	X	Χ	Χ	Χ											
Digging Bucket, STD, 23 cm, Klac™ System D, E26/E27/E27z	7150066	35	17									Χ	Χ	Χ								
Digging Bucket, STD, 25 cm, Klac™ System D, E26/E27/E27z	7138629	49	19									Χ	Χ	Χ								
Digging Bucket, STD, 30 cm, Klac [™] System D, E26/E27/E27z	7138630	54	25									Χ	Χ	Χ								
Digging Bucket, STD, 40 cm, Klac™ System D, E26/E27/E27z	7138631	60	38									Χ	Χ	Χ								
Digging Bucket, STD, 45 cm, Klac™ System D, E26/E27/E27z	7150067	64	44									Χ	Χ	Χ								
Digging Bucket, STD, 50 cm, Klac [™] System D, E26/E27/E27z	7138632	52	51									Χ	Χ	Χ								
Digging Bucket, STD, 60 cm, Klac™ System D, E26/E27/E27z	7138633	59	64									Χ	Χ	Χ								
Digging Bucket, STD, 70 cm, Klac™ System D, E27/E27z	7150068	55	78										Χ	Χ								
Digging Bucket, STD, 23 cm, Klac™ System D, E34/E35z	7150069	48	21												Χ	Χ						
Digging Bucket, STD, 30 cm, Klac™ System D, E34/E35z	7138637	54	32												Χ	Χ						
Digging Bucket, STD, 40 cm, Klac™ System D, E34/E35z	7138638	60	48												Χ	Χ						
Digging Bucket, STD, 50 cm, Klac™ System D, E34/E35z	7138639	67	65												Χ	Χ						
Digging Bucket, STD, 60 cm, Klac™ System D, E34/E35z	7138640	71	82												Χ	Χ						
Digging Bucket, STD, 70 cm, Klac™ System D, E34/E35z	7138641	78	100												Χ	Χ						
Digging Bucket, STD, 80 cm, Klac™ System D, E34/E35z	7150071	85	117												Χ	Χ						
Digging Bucket, STD, 30 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138670	72	48														Χ	Χ	Χ			Χ
Digging Bucket, STD, 40 cm, Klac [™] System E, E50z/E55z/ E60/E57W	7138671	86	71														Χ	Χ	Χ			Χ
Digging Bucket, STD, 50 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138672	98	96														Χ	Χ	Χ			Χ
Digging Bucket, STD, 60 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138673	116	122														Х	Χ	Х			Χ
Digging Bucket, STD, 70 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138674	127	148														Χ	Χ	Х			Х
Digging Bucket, STD, 80 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138675	140	174														Х	Х	X			Х
Digging Bucket, STD, 90 cm, Klac™ System E, E50z/E55z/ E60/E57W	7138676	153	200														Χ	Χ	Χ			Χ

COMPACT EXCAVATORS

BUCKET, DIGGING, UK TYPE




TECHNICAL SPECIFICATIONS / COMPATIBILITY CHARTS

rements Features & Benefits

- Ideal for direct fit or pairing with pin grabber couplers.
 Buckets come with a large selection of widths to best suit
- your need.
 Supporting ribs for additional robustness.
- Carrying hooks for easy transport around the jobsite.
- Choose between reversible cutting edge or teeth with intergrated side cutter.
- Drain holes allow water to escape from the bucket, helping operators working under wet conditions.

Buckets: Pin-on coupling system

Description: Tackle the toughest digging and material handling jobs with our robust digging buckets. They offer excellent breakout force for digging and easier bucket filling.





											Cor	npac	t Exc	cavat	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging bucket, UK, 15 cm, Pin-On, Teeth, E08/E10z/E10e	7414237.P0T2	16	4.9	Х	Χ	Χ																
Digging bucket, UK, 15 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7414237.P0R2	13	4.9	Х	Χ	Χ																
Digging bucket, UK, 23 cm, Pin-On, Teeth, E08/E10z/E10e	7407974.P0T2	19	8.7	Χ	Χ	Χ																
Digging bucket, UK, 23 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7407974.P0R2	17	8.7	Χ	Χ	Χ																
Digging bucket, UK, 30 cm, Pin-On, Teeth, E08/E10z/E10e	7407982.P0T2	22	13	Χ	Χ	Χ																
Digging bucket, UK, 30 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7407982.P0R2	21	13	Χ	Χ	Χ																
Digging bucket, UK, 45 cm, Pin-On, Teeth, E08/E10z/E10e	7407990.P0T2	29	22	Χ	Χ	Χ																
Digging bucket, UK, 45 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7407990.P0R2	29	22	Х	Χ	Χ																
Digging bucket, UK, 60 cm, Pin-On, Teeth, E08/E10z/E10e	7414239.P0T2	36	31	Χ	Χ	Χ																
Digging bucket, UK, 60 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7414239.P0R2	36	31	Х	Χ	Χ																
Digging bucket, UK, 15 cm, Pin-On, Teeth, E17/E17z/E19/E19e/E20z	7414185.P1T2	22	8.2				Χ	Χ	Χ	Χ	χ											
Digging bucket, UK, 15 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7414185.P1R2	20	8.2				Х	Χ	Χ	Χ	χ											
Digging bucket, UK, 23 cm, Pin-On, Teeth, E17/E17z/E19/E19e/E20z	7405642.P1T2	25	13				Χ	Χ	Χ	Χ	χ											
Digging bucket, UK, 23 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7405642.P1R2	24	13				Х	Χ	Χ	Χ	Χ											
Digging bucket, UK, 30 cm, Pin-On, Teeth, E17/E17z/E19/E19e/E20z	7405644.P1T2	28	20				Χ	Χ	Χ	Χ	Χ											
Digging bucket, UK, 30 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7405644.P1R2	28	20				Х	Χ	Х	Χ	Χ											
Digging bucket, UK, 45 cm, Pin-On, Teeth, E17/E17z/E19/E19e/E20z	7405646.P1T2	38	34				Χ	Χ	Χ	Χ	Χ											
Digging bucket, UK, 45 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7405646.P1R2	38	34				Χ	Χ	Х	Χ	Χ											
Digging bucket, UK, 60 cm, Pin-On, Teeth, E17/E17z/E19/E19e/E20z	7405648.P1T2	47	49				Χ	Χ	Χ	Χ	χ											
Digging bucket, UK, 60 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7405648.P1R2	47	49				Х	Χ	Χ	Χ	Χ											

			Ca-								Cor	npac	t Exc	cava	tors							
Description	Part Number	Weight (kg)	pacity (I)	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging bucket, UK, 23 cm, Pin-On, Teeth, E26/E27/E27z	7414159.P2T2	39	18									Х	Х	Χ								
Digging bucket, UK, 23 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7414159.P2R2	37	18									Χ	Χ	Х								
Digging bucket, UK, 30 cm, Pin-On, Teeth, E26/E27/E27z	7405439.P2T2	43	25									Χ	Χ	Χ								
Digging bucket, UK, 30 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7405439.P2R2	42	25									χ	Χ	Х								
Digging bucket, UK, 45 cm, Pin-On, Teeth, E26/E27/E27z	7405441.P2T2	56	44									Χ	Χ	Χ								
Digging bucket, UK, 45 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7405441.P2R2	56	44									Χ	Χ	Χ								
Digging bucket, UK, 60 cm, Pin-On, Teeth, E26/E27/E27z	7405443.P2T2	68	64									Χ	Χ	Χ								
Digging bucket, UK, 60 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7405443.P2R2	68	64									X	Χ	Χ								
Digging bucket, UK, 75 cm, Pin-On, Teeth, E26/E27/E27z	7405445.P2T2	79	84									Χ	Χ	Χ								
Digging bucket, UK, 75 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7405445.P2R2	81	84									X	Χ	X								

OPTIONS / ACCESSORIES																				
									(Compa	ict Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Reversible Cutting Edge, 15 cm	7463418	Χ	Х	Χ																
Reversible Cutting Edge, 23 cm	7463419	Χ	Х	Χ																
Reversible Cutting Edge, 30 cm	7463420	Χ	Χ	Χ																
Reversible Cutting Edge, 45 cm	7463421	Χ	Х	Χ																
Reversible Cutting Edge, 60 cm	7463422	Χ	Χ	Χ																
Reversible Cutting Edge, 15 cm	7463423				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Х						
Reversible Cutting Edge, 23 cm	7463424				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ						
Reversible Cutting Edge, 30 cm	7463425				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Х						
Reversible Cutting Edge, 45 cm	7463426				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ						
Reversible Cutting Edge, 60 cm	7463427				Χ	Χ	Χ	Х	Χ	Χ	Χ	Х	Х	Х						
Reversible Cutting Edge, 75 cm	7463428				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ						
Pin kit package, 5 pairs - E08/E10z/E10e/E17/E17z/ E19/E19e/E20z *	7433285	Х	Х	Х	Х	Х	Х	Х	Х											
Pin kit package, 10 pairs - E08/E10z/E10e/E17/E17z/ E19/E19e/E20z *	7433286	X	Χ	X	Χ	Χ	Χ	Х	Χ											
Pin kit package, 5 pairs - E26/E27/E27z/E34/E35z *	7433287									Χ	Χ	Х	Χ	Х						
Pin kit package, 10 pairs - E26/E27/E27z/E34/E35z *	7433288									Χ	Χ	Χ	Х	Χ						
Pin kit package, 3 pairs - E50z/E55z/E60/E57W *	7493004														Χ	Х	Х			Χ
Pin kit package, 3 pairs - E85/E88 *	7493005																	Χ	Χ	

^{*} Not approved as direct fit.



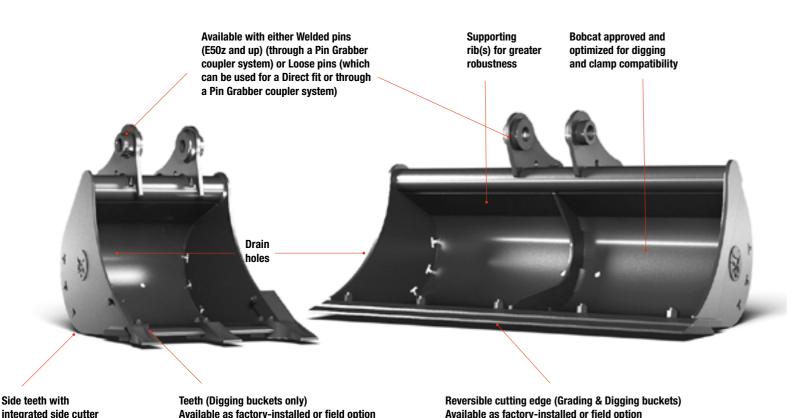



ATTACHMENT: UK STYLE BUCKETS

UK STYLE BUCKETS DURABLE AND COST-EFFECTIVE

- **Durable** Specific UK design guarantees long product life in many applications.
- Competitive price Bobcat's engineering design assures maximum breakout force and low maintenance needs, while keeping these buckets competitive on the market.
- Additional features Wide range of options available, such as reversible cutting edges, teeth and other kits to fit any job site. Buckets are optimized to be attached directly or with Pin Grabber couplers.
- Direct fit or Pin Grabber Couplers.
- **Supporting ribs for additional robustness.**
- Choose between reversible cutting edge (Grading and Digging buckets) or teeth with integrated side cutter (Digging buckets only).
- Drain holes allow water to escape from the bucket, which helps in wet conditions.
- Large selection of widths to best suit your needs.

Learn more on page 34.



BUCKET, DIGGING, GERMAN PROFILE





Deep double radius bucket
 Weld-on teeth from E45 up for better durability

Transportation hook is part of the fitting

Features & Benefits

Buckets: Machine must be equipped with a German System QC03 coupling system.

Description: Tackle the toughest digging and material handling jobs with our robust digging buckets. They offer excellent breakout force for digging and easier bucket filling.

German System

TECHNICAL SPECIFICATIONS / COMPATIBILITY CHART	S				_					_					_					_	_	
											Cor	npac	t Exc	cavat	ors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Digging Bucket German Type HD, 25 cm, QC01, E17/E17z/E19/E19e/E20z	7241056	29	22				Χ	Х	Χ	Χ	Χ											
Digging Bucket German Type HD, 30 cm, QC01, E17/E17z/E19/E19e/E20z	7241082	32	28				Χ	Χ	Χ	Χ	Χ											
Digging Bucket German Type HD, 40 cm, QC01, E17/E17z/E19/E19e/E20z	7241083	37	40				X	X	Χ	Χ	Χ											
Digging Bucket German Type HD, 50 cm, QC01, E17/E17z/E19/E19e/E20z	7241084	43	52				Χ	X	Χ	Χ	Χ											
Digging Bucket German Type HD, 60 cm, QC01, E17/E17z/E19/E19e/E20z	7241085	48	64				Χ	X	Χ	Χ	X											
Digging Bucket German Type HD, 30 cm, QC03, E26/E27/E27z	7200189	51	42									Χ	Χ	Χ								
Digging Bucket German Type HD, 40 cm, QC03, E26/E27/E27z	7200190	57	61									Χ	Χ	Χ								
Digging Bucket German Type HD, 50 cm, QC03, E26/E27/E27z	7200192	67	79									Χ	Χ	Χ								
Digging Bucket German Type HD, 60 cm, QC03, E26/E27/E27z	7200193	75	98									Χ	Χ	Χ								
Digging Bucket German Type HD, 70 cm, QC03, E26/E27/E27z	7200194	87	117									Χ	Χ	Χ								
Digging Bucket German Type HD, 30 cm, QC03, E34/E35z	7241288	64	54												Χ	Χ						
Digging Bucket German Type HD, 40 cm, QC03, E34/E35z	7241289	73	78												Χ	Χ						
Digging Bucket German Type HD, 60 cm, QC03, E34/E35z	7241290	93	129												Χ	Χ						
Digging Bucket German Type HD, 80 cm, QC03, E34/E35z	7241291	114	180												Χ	Χ						
Digging Bucket German Type HD, 30 cm, QC03, E50z/E55z/ E60/E57W	7192931	89	63														X	Χ	Χ			Χ
Digging Bucket German Type HD, 40 cm, QC03, E50z/E55z/ E60/E57W	7192932	102	90														Χ	Χ	Χ			Χ
Digging Bucket German Type HD, 60 cm, QC03, E50z/E55z/ E60/E57W	7192934	131	145														Χ	Χ	Χ			Χ
Digging Bucket German Type HD, 80 cm, QC03, E50z/E55z/ E60/E57W	7192936	160	201														Χ	Χ	Χ			Χ
Digging Bucket German Type HD, 40 cm, QC08, E85/E88	7241372	153	127																	Χ	Χ	
Digging Bucket German Type HD, 60 cm, QC08, E85/E88	7241373	192	212																	Χ	Χ	
Digging Bucket German Type HD, 80 cm, QC08, E85/E88	7241374	232	303																	Χ	Χ	

COMPACT EXCAVATORS

BUCKET, GRADING


Requirements • Weld-on cutting edge: Provides a stronger, more resilient cutting edge • 2 web plates are added for an extra strength • Draining holes Grading Buckets: Type of fittings depends on the coupling system.

Description: Increase profitability by removing ditch sediment quickly and easily. Cleaning ditches and backfilling take no time with our grading buckets.



TECHNICAL SPECIFICATIONS / COMPATIBILITY CHAR	rs																					
			Capac-								Cor	npac	t Ex	cava	tors							
Description	Part Number	Weight (kg)	ity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Grading Bucket, STD, 80 cm, Pin-On, E08/E10z/E10e	7208132	34	54	Χ	Χ	Χ																
Grading Bucket, STD, 80 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141521	52	64				Χ	Χ	Χ	Χ	Χ											
Grading Bucket, STD, 100 cm, Pin-On, E17/E19/E19e/E20z	7141522	56	81				Χ		Χ	Χ	Χ											
Grading Bucket, STD, 100 cm, Pin-On, E26/E27/E27z	7197070	65	109									Χ	Χ	Χ								
Grading Bucket, STD, 120 cm, Pin-On, E26/E27/E27z	7197071	76	133									Χ	Χ	Χ								
Grading Bucket, STD, 120 cm, Pin-On, E34/E35z	7180763	97	148												Χ	Χ						
Grading Bucket, STD, 140 cm, Pin-On, E34/E35z	7180764	109	175												Χ	Χ						
Grading Bucket, STD, 140 cm, Pin-On, E50z/E55z/E60	7189752	156	255														Χ	Χ	Χ			
Grading Bucket, STD, 150 cm, Pin-On, E50z/E55z/E60	7189753	164	274														Χ	Χ	Χ			
Grading Bucket, STD, 150 cm, Pin-On, E57W	7208498.PDH	161	236																			Χ
Grading Bucket, HD, 150 cm, Pin-On, E85/E88	7208512.PDH	216	348																	Χ	X1	
Grading Bucket, HD, 180 cm, Pin-On, E85/E88	7208513.PDH	248	430																	Χ	Χ¹	
Grading Bucket, STD, 80 cm, Klac™ System C, E17/E17z/E19/E19e/E20z	7138627	52	64				Χ	Χ	Χ	Х	Χ											
Grading Bucket, STD, 100 cm, Klac™ System C, E17/E19/E19e/E20z	7138628	56	81				Х		Χ	Х	Χ											
Grading Bucket, STD, 100 cm, Klac™ System D, E26/E27/E27z	7138634	62	103									Χ	Χ	Χ								
Grading Bucket, STD, 120 cm, Klac [™] System D, E26/E27/E27z	7138635	74	120									Χ	Х	Х								
Grading Bucket, STD, 120 cm, Klac™ System D, E34/E35z	7143789	112	105												Χ	Χ						
Grading Bucket, STD, 140 cm, Klac™ System D, E34/E35z	7138642	129	129												Х	Χ						
Grading Bucket, STD, 130 cm, Klac™ System E, E50z/E55z/E60/E57W	7208497.K	145	202														Χ	Χ	Χ			Χ
Grading Bucket, STD, 150 cm, Klac™ System E, E50z/E55z/E60/E57W	7208498.K	161	236														Χ	Χ	Χ			Х
Grading Bucket, STD, 150 cm, Klac™ System F, E85/E88	7208512.K	216	348																	Χ	Χ	
Grading Bucket, HD, 180 cm, Klac [™] System F, E85/E88	7208513.K	248	430																	Χ	Χ	

BUCKET, GRADING, GERMAN TYPE

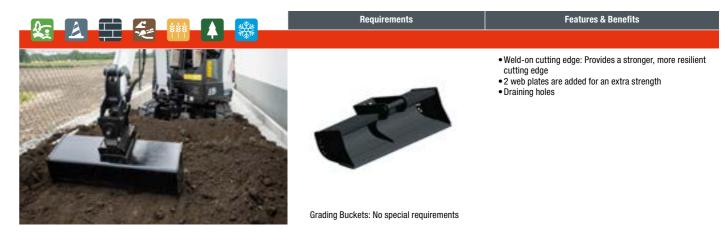

Description: Increase profitability by removing ditch sediment quickly and easily. Cleaning ditches and backfilling take no time with our grading buckets.




											Cor	npac	t Exc	cavat	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Grading Bucket German Type, 80 cm, QC01, E17/E17z/E19/E19e/E20z	7241086	64	71				Х	Х	Х	Х	Х											
Grading Bucket German Type, 100 cm, QC01, E17/E19/E19e/E20z	7241087	77	91				Χ		Χ	X	Χ											
Grading Bucket German Type, 120 cm, QC03, E26/E27/E27z	7200196	93	110									Χ	Χ	Χ								
Grading Bucket German Type, 130 cm, QC03, E34/E35z	7241292	158	191												Χ	Χ						
Grading Bucket German Type, 150 cm, QC03, E50z/E55z/ E60/E57W	7192937	177	174														Χ	Χ	Χ			X
Grading Bucket German Type, 180 cm, QC08, E85/E88	7241377	296	369																	Χ	Χ	

¹Pin grabber needed for E88 compatibility

BUCKET, GRADING, UK STYLE



Description: Increase profitability by removing ditch sediment quickly and easily. Cleaning ditches and backfilling take no time with our grading buckets.



											Cor	npac	t Exc	avat	ors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E272	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Grading Bucket, UK, STD, 80 cm, Pin-On, Reversible Cutting Edge, E08/E10z/E10e	7208132. P0R2	48	54	Х	Х	Χ																
Grading Bucket, UK, STD, 80 cm, Pin-On, E08/E10z/E10e	7208132.P02	34	54	Χ	Χ	Χ																
Grading Bucket, UK, STD, 80 cm, Pin-On, Reversible Cutting Edge, E17/E17z/E19/E19e/E20z	7141521. P1R2	66	64				Χ	Χ	Χ	Χ	Χ											
Grading Bucket, UK, STD, 80 cm, Pin-On, E17/E17z/E19/E19e/E20z	7141521.P12	52	64				Χ	Χ	Χ	Χ	Χ											
Grading Bucket, UK, STD, 100 cm, Pin-On, Reversible Cutting Edge, E17/E19/E19e/E20z	7141522. P1R2	73	81				Χ		Χ	Χ	Χ											
Grading Bucket, UK, STD, 100 cm, Pin-On, E17/E19/E19e/E20z	7141522.P12	56	81				Χ		Χ	Χ	Χ											
Grading Bucket, UK, STD, 100 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7197070. P2R2	82	109									Χ	Χ	Χ								
Grading Bucket, UK, STD, 100 cm, Pin-On, E26/E27/E27z	7197070.P22	65	109									Χ	Χ	Χ								
Grading Bucket, UK, STD, 120 cm, Pin-On, Reversible Cutting Edge, E26/E27/E27z	7197071. P2R2	96	133									Χ	Χ	Χ								
Grading Bucket, UK, STD, 120 cm, E26/E27/E27z	7197071.P22	76	133									Χ	Χ	Х								

OPTIONS / ACCESSORIES																				
									C	ompa	ct Exc	avato	rs							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Reversible Cutting Edge, 80 cm	7414918	Χ	Χ	Χ	Χ	Χ	Χ	χ	Χ											
Reversible Cutting Edge, 100 cm	7414919				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ								
Reversible Cutting Edge, 120 cm	7414920									Χ	Χ	Χ	Χ	Χ						
Reversible Cutting Edge, 140 cm	7432124												Χ	Χ						
Pin kit package, 5 pairs - E08/E10z/E10e/E17/E17z/E19/E19e/E20z *	7433285	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ										
Pin kit package, 10 pairs - E08/E10z/E10e/E17/E17z/E19/E19e/E20z *	7433286	Χ	Х	Х	Х	Х	Х	Х	Х	Х										
Pin kit package, 5 pairs - E26/E27/E27z/E34/E35z *	7433287									Χ	Χ	Χ	Χ	Χ						
Pin kit package, 10 pairs - E26/E27/E27z/E34/E35z *	7433288									Χ	Χ	Χ	Χ	Χ						
Pin kit package, 3 pairs - E50z/E55z/E60/E57W *	7493004														Χ	Χ	Χ			Χ
Pin kit package, 3 pairs - E85/E88 *	7493005																	Χ	Χ	

^{*} Not approved as direct fit.

BUCKET, SKELETON




Features & Benefits


• Skeleton buckets allow sand, dried fine dirt and water to drain while capturing solid bulky material like rocks, stones, roots, and debris.

- · Ideal for land clearing, landscaping and recycling
- applications.
 Tines are spaced between 4.7 and 5.3 cm.
 Wide range of bucket widths available to best suit your machine and ground conditions.
- Comes with Bolt-on teeth.
- Fits Pin-On, Klac™ System and German System couplers.

Skeleton Buckets: Type of fittings depends on the coupling system.

Description: Allows sand, dry fine dirt and water to drain while picking up solid bulky material like rocks, stones, roots, and debris. It fits Pin-On, KlacTM System and German System and has bolt-on teeth.







TECHNICAL SPECIFICATIONS / COMPATIBILITY CHAR	TS																					
			Tine								Coi	mpac	t Ex	cava	tors							
Description	Part Number	Weight (kg)	spacing (mm)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Skeleton Bucket, 50 cm, Pin-On, E17/E17z/E19/E19e/E20z	7189650.P	59	49				Χ	Χ	Χ	Χ	Χ											
Skeleton Bucket, 60 cm, Pin-On, E17/E17z/E19/E19e/E20z	7189651.P	64	52				Χ	Χ	Χ	Χ	Χ											
Skeleton Bucket, 60 cm, Pin-On, E26/E27/E27z	7189653.P	85	52									Χ	Χ	Χ								
Skeleton Bucket, 80 cm, Pin-On, E26/E27/E27z	7189655.P	107	49									Χ	Χ	X								
Skeleton Bucket, 80 cm, Pin-On, E34/E35z	7189657.P	127	49												Χ	Χ						
Skeleton Bucket, 90 cm, Pin-On, E34/E35z	7189658.P	137	47												Χ	Χ						
Skeleton Bucket, 80 cm, Pin-On, E50z/E55z/E60	7189659.PE4	196	51														Χ	Χ	Χ			
Skeleton Bucket, 100 cm, Pin-On, E50z/E55z/E60	7189661.PE4	230	52														Χ	Χ	Χ			
Skeleton Bucket, 80 cm, Pin-On, E57W	7189659.PDH	196	51																			Χ
Skeleton Bucket, 90 cm, Pin-On, E57W	7189660.PDH	215	49																			Χ
Skeleton Bucket, 100 cm, Pin-On, E57W	7189661.PDH	230	52																			Χ
Skeleton Bucket, 80 cm, Pin-On, E85/E88	7189662.P	300	53																	Χ	Χ¹	
Skeleton Bucket, 100 cm, Pin-On, E85/E88	7189664.P	353	53																	Χ	χ1	
Skeleton Bucket 50cm, Klac C, E17/E17z/E19/E19e/E20z	7189650.K	60	48				Χ	Χ	Χ	Χ	Χ											
Skeleton Bucket 60cm, Klac C, E17/E17z/E19/E19e/E20z	7189651.K	65	52				Χ	Χ	Χ	Χ	Χ											

¹Pin grabber needed for E88 compatibility

			Tine								Cor	npac	t Exc	cavai	tors							
Description	Part Number	Weight (kg)	spacing (mm)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Skeleton Bucket 60cm, Klac D, E26/E27/E27z	7189653.K	88	52									Χ	Χ	Χ								
Skeleton Bucket 80cm, Klac D, E26/E27/E27z	7189655.K	109	49									Χ	Χ	Χ								
Skeleton Bucket 80cm, Klac D, E34/E35z	7189657.K	127	49												Χ	Χ						
Skeleton Bucket 90cm, Klac D, E34/E35z	7189658.K	139	47												Χ	Χ						
Skeleton Bucket 80cm, Klac E, E50z/E55z/E60/E57W	7189659.K	194	51														Χ	Χ	Χ			Χ
Skeleton Bucket 100cm, Klac E, E50z/E55z/E60/E57W	7189661.K	226	516														Χ	Χ	Χ			Χ
Skeleton Bucket 80cm, Klac F, E85/E88	7189662.K	299	533																	Χ	Χ	
Skeleton Bucket 100cm, Klac F, E85/E88	7189664.K	352	529																	Χ	Χ	
Skeleton Bucket, 50 cm, German System QC01, E17/E17z/E19/E19e/E20z	7189650.L	63	475				Χ	Χ	Χ	Χ	Χ											
Skeleton Bucket, 60 cm, German System QC01, E17/E17z/E19/E19e/E20z	7189651.L	68	522				Χ	Χ	Χ	Χ	Χ											
Skeleton Bucket, 60 cm, German System QC03, E26/E27/E27z	7189653.L	93	522									Χ	Χ	Χ								
Skeleton Bucket, 80 cm, German System QC03, E26/E27/E27z	7189655.L	114	485									Χ	Χ	Χ								
Skeleton Bucket, 80 cm, German System QC03, E34/E35z	7189657.L	133	485												Χ	Χ						
Skeleton Bucket, 90 cm, German System QC03, E34/E35z	7189658.L	143	473												Χ	Χ						
Skeleton Bucket, 80 cm, German System QC03, E50z/E55z/ E60/E57W	7189659.L	193	508														Χ	Χ	Х			X
Skeleton Bucket, 100 cm, German System QC03, E50z/E55z/ E60/E57W	7189661.L	227	516														Χ	Χ	X			X
Skeleton Bucket, 80 cm, German System QC08, E85/E88	7189662.L	296	533																	Χ	Χ	
Skeleton Bucket, 100 cm, German System QC08, E85/E88	7189664.L	345	529																	Χ	Χ	

COMPACT EXCAVATORS

B4501805-EN (01-25)

BUCKET, TILT






equirements Features & Benefits

• Features a tilt cylinder allowing tilting 45° left and 45° right to tackle any slopes.

- Available with multiple hook-up systems (Pin-On, Klac™ System, German System).
- Compact and robust design.
- Single cylinder with mud guard protection.

Tilt Buckets: No special requirement.

Description: Saves time and improves productivity. The tilt bucket is a grading bucket with an integrated hydraulic cylinder, allowing the bucket to be tilted to either side by 45° left and right. It saves you time on countless jobs by simply tilting the bucket instead of having to reposition the entire machine. It is ideal for land clearing, landscaping and backfilling.







TECHNICAL SPECIFICATIONS / COMPATIBILITY CHAR											_											
	Dout	Weight	Consoitu								Cor	npac	t Exc	ava	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E82	E88	E57W
Tilt Bucket, 80 cm, Pin-On, E17/E17z/E19/E19e/E20z	7190045.P	86	60				Χ	Χ	Χ	Χ	Χ											
Tilt Bucket, 100 cm, Pin-On, E17/E19/E19e/E20z	7191196.P	95	62				Χ		Χ	Χ	Χ											
Tilt Bucket, 120 cm, Pin-On, E26/E27/E27z	7184275.P	169	113									Χ	Χ	Χ								
Tilt Bucket, 140 cm, Pin-On, E26/E27/E27z	7184276.P	182	132									Χ	Χ	Χ								
Tilt Bucket, 120 cm, Pin-On, E34/E35z	7184278.P	175	139												Χ	Χ						
Tilt Bucket, 140 cm, Pin-On, E34/E35z	7184279.P	189	164												Χ	Χ						
Tilt Bucket, 140 cm, Pin-On, E50z/E55z/E60	7184281.P	221	206														Χ	Χ	Χ			
Tilt Bucket, 150 cm, Pin-On, E50z/E55z/E60	7184282.P	229	222														Χ	Χ	Χ			
Tilt Bucket, 150 cm, Pin-On, E57W	7215854.P	229	222																			Χ
Tilt Bucket, 160 cm, Pin-On, E85/E88	7215895.P	362	314																	Χ	X1	
Tilt Bucket, 80 cm, Klac™ System C, E17/E19/E19e/E20z	7190045.K	88	60				Χ		Χ	Χ	Χ											
Tilt Bucket, 100 cm, Klac™ System C, E17/E19/E19e/E20z	7191196.K	97	62				Χ		Χ	Χ	Χ											
Tilt Bucket, 120 cm, Klac™ System D, E26/E27/E27z	7184275.K	172	113									Χ	Χ	Χ								
Tilt Bucket, 140 cm, Klac™ System D, E26/E27/E27z	7184276.K	186	132									Χ	Χ	Χ								
Tilt Bucket, 120 cm, Klac™ System D, E34/E35z	7184278.K	178	139												Χ	Χ						
Tilt Bucket, 140 cm, Klac™ System D, E34/E35z	7184279.K	193	164												Χ	Χ						
Tilt Bucket, 140 cm, Klac™ System E, E50z/E55z/E60	7184281.K	227	206														Χ	Χ	Χ			
Tilt Bucket, 150 cm, Klac™ System E, E50z/E55z/E60	7184282.K	235	222														Χ	Χ	Χ			
Tilt Bucket, 150 cm, Klac™ System E, E57W	7215854.K	235	222																			Χ
Tilt Bucket, 160 cm, Klac™ System F, E85/E88	7215895.K	362	314																	Χ	Χ	

¹Pin grabber needed for E88 compatibility

											Cor	npac	t Exc	cavat	tors							
Description	Part Number	Weight (kg)	Capacity (I)	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Filt Bucket, 80 cm, German System QC01, E17/E19/E19e/E20z	7190045.L	89	60				χ		Χ	Χ	Χ											
Filt Bucket, 100 cm, German System QC01, E17/E19/E19e/E20z	7191196.L	98	62				χ		Χ	Χ	Χ											
ilt Bucket, 120 cm, German System QC03, E26/E27/E27z	7184275.L	174	113									χ	Χ	Χ								
Filt Bucket, 140 cm, German System QC03, E26/E27/E27z	7184276.L	188	132									χ	Χ	Χ								
Filt Bucket, 120 cm, German System QC03, E34/E35z	7184278.L	180	139												Χ	Χ						
Filt Bucket, 140 cm, German System QC03, E34/E35z	7184279.L	195	164												Χ	Χ						
Filt Bucket, 140 cm, German System QC03, E50z/E55z/E60	7184281.L	220	206														Χ	Χ	Χ			
Filt Bucket, 150 cm, German System QC03, E50z/E55z/E60	7184282.L	228	222														Χ	Χ	Χ			
Filt Bucket, 150 cm, German System QC03, E57W	7215854.L	228	222																			Χ
Filt Bucket, 160 cm, German System QC08, E85/E88	7215895.L	362	314																	Χ	Х	

COUPLER, HYDRAULIC



Features & Benefits

German System Coupler

- · Double locking coupler for greater safety, applying ISO 13031 norm Hydraulically operated from
- the cab for quick and easy attachment changeover
- Pins under constant pressure to guarantee a tight grip
- . Play-free locking in case of eventual pin wear • Robust, yet compact design
- for maximum breakout force Maintenance-free, with few components for peace of mind
- Also available with lifting hook 3-5 ton lifting capacity

Pin Grabber


- Robust yet compact and light design increasing breakout force
- Double locking system (Front and Rear) meeting ISO13031
- Powerful springs area activated in case of power Variable pin center to
- increase pin on attachments pick up
- · Reversibility is standard without modifications
- Fast and easy installation.

Coupler hydraulic: Includes Coupler

Description: Hydraulically connected to the machine, the Bobcat Hydraulic Coupler allows you to change attachments rapidly and safely and from the comfort and security of your cab. It allows to take a variety of attachments.







TECHNICAL SPECIFICATIONS							
Description	Part Number	Height (mm)	Width (mm)	Length (mm)	Weight (kg)	Operating Pressure (bar)	Max. Pressure (bar)
Hydraulic Quick Coupler, German System, QC03	7320198	291	232	372	26.5	150	250
Hydraulic Quick Coupler, German System, QC03	7320199	273	259	446	31.0	150	250
Hydraulic Quick Coupler, German System, QC03	7320200	285	266	436	33.4	150	250
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320280	291	240	403	31.2	150	250
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320281	289	259	463	32.8	150	250
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320282	285	266	503	35.9	150	250
Hydraulic Quick Coupler, German System, QC08 with Lift Hook *	7320283	363	325	554	80.5	200 - 300	350
Hydraulic Quick Coupler, German System, QC08 with	7450207	245	225	500	01	200 200	250

 $[\]ensuremath{^{\star}}$ Object handling option mandatory - available as machine option

TECHNICAL SPECIFICATIONS										
Description	Part Number	Attachment Pin Diameter (mm)	Minimum Pin Center (mm)	Max. Pin Center (mm)	Base Width with Calipers (mm)	Lift Eye Capacity (kg)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Hydraulic Quick Coupler Pin Grabber QC35	7340046	35	178	203	132	-	34	Yes	Standard	1 h
Hydraulic Quick Coupler Pin Grabber QC45	7340047	45	218	267	150	-	65	Yes	Standard	1 h
Hydraulic Quick Coupler Pin Grabber QC45	7458291	45	262	311	200	-	79	Yes	Standard	1 h



PINS FOR THE ATTACHMENT TO BE ORDERED SEPARATELY. PLEASE REFER TO PAGE 22

									(Compa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Hydraulic Quick Coupler, German System, QC03	7320198									Х	Х	Х	Х	Х						
Hydraulic Quick Coupler, German System, QC03	7320199														Х	Χ	Χ			
Hydraulic Quick Coupler, German System, QC03	7320200																			Х
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320280									Χ	Х	Χ	Χ	Х						
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320281														Χ	Χ	Χ			
Hydraulic Quick Coupler, German System, QC03 with Lift Hook *	7320282																			Х
Hydraulic Quick Coupler, German System, QC08 with Lift Hook *	7320283																	Χ¹		
Hydraulic Quick Coupler, German System, QC08 with Lift Hook *	7458287																		Χ	
Hydraulic Quick Coupler Pin Grabber QC35	7340046									Χ	Χ	Χ	Χ	Χ						
Hydraulic Quick Coupler Pin Grabber QC45	7340047														Χ	Χ	Χ			
Hydraulic Quick Coupler Pin Grabber QC45*	7458291																		Χ	

Note: Additional pins needed for using buckets with pin grabber **

^{*} Object handling option mandatory - available as machine option

									(Compa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Hydraulic Quick Coupler Ready Kit, E26	7352649									Χ**										
Hydraulic Quick Coupler Ready Kit, E27/E27z	7352650										X**	X**								
Hydraulic Quick Coupler Ready Kit, E34, E35z	7247867												X**	X**						
Hydraulic Quick Coupler Ready Kit, E50z, E55z	7441794														X**	X**				
Hydraulic Quick Coupler Ready Kit, E60	7441796																X**			
Hydraulic Quick Coupler Ready Kit, E57W	7441543																			X**

^{*** &}quot;Hydraulic Quick Coupler Ready Kit, E57W" needed for E57W s/n B54A11001 & above and s/n B3WU13522 & above

OPTIONS / ACCESSORIES			
Coupler used	Pin**	Securing screw, hex **	Lock nut, hex **
Coupler Pin Grabber QC35	7181216 (2)	1CM1075 (2)	16DM10 (4)
Coupler Pin Grabber QC45	7143036 (2)	7CM1280 (2)	16DM12 (4)

Note: Additional pins needed for using buckets with pin grabber **



NOTE: "HYDRAULIC QUICK COUPLER AS FACTORY OPTION OR AS KIT **THROUGH BOBCAT PARTS**



USING A COUPLER MAY MODIFY THE STABILITY AND BREAKOUT FORCE OF THE EXCAVATOR. PLEASE CONTACT YOUR **BOBCAT DISTRIBUTOR OR DISTRICT** MANAGER FOR MORE INFORMATION AND A LIST OF APPROVED ATTACHMENTS

Lift Hook

COMPACT EXCAVATORS

COUPLER, HYDRAULIC TILT



Description: The Bobcat Hydraulic Tilt Coupler allows you to change attachments hydraulically, rapidly and from the comfort and security of your cab. Coupler systems turn excavators into tool-carriers, switching between different buckets and attachments in a matter of seconds. It combines all the benefits of a quick coupler with a tilt actuator. So you can always use the right tool for the job, maximizing efficiency and productivity.



FOR E26, E27, E27Z, E34, E35Z, E50Z, E55Z AND E60, MACHINE TO BE EQUIPPED WITH AUX4 HYDRAULIC LINE FOR BEST PERFORMANCE

TECHNICAL SPECIFICATIONS											
Description	Part Number	Height (mm)	Width (mm)	Length (mm)	Overall Rotation (°)	Weight (kg)	Capacity (cm³)	Operating Pressure (bar)	Relief Pressure (bar)	Output Torque¹ (Nm)	Holding Tourque (Nm)
Hydraulic Tilt Coupler, German System, TC03	7328428	467	232	373	88 - 92	61.7	623	207	225	1630	2260
Hydraulic Tilt Coupler, German System, TC03	7328429	497	232	426	88 - 92	77.6	936	207	225	2600	6430
Hydraulic Tilt Coupler, German System, TC03	7328430	524	259	516	88 - 92	118.7	1262	207	225	4375	9350
Hydraulic Tilt Coupler, German System, TC03	7328431	544	277	505	88 - 92	118.6	1262	207	225	4375	14850
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328432	483	232	397	88 - 92	63.5	623	207	225	1630	14850
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328433	503	232	445	88 - 92	79.4	936	207	225	2600	2260
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328434	556	259	536	88 - 92	120.4	1262	207	225	4375	6430
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328435	561	277	565	88 - 92	120.9	1262	207	225	4375	9350
Hydraulic Tilt Coupler, German System, TC08 with Lift Hook *	7328436	667	325	627	88 - 92	192.7	1950	207	225	6650	14850
Hydraulic Tilt Coupler, German System, TC08 with Lift Hook *	7458289	670	325	570	88-92	200	1950	207	225	6650	14850

¹at 207 bar



FOR M-SERIES EXCAVATORS,
"ARM MOUNTED AUX2 WITH
CAPS" OPTION IS NEEDED!
AVAILABLE AS FACTORY OPTION
OR AS KIT THROUGH BOBCAT
PARTS



"HYDRAULIC QUICK HITCH
READY" OPTION IS NEEDED!
AVAILABLE AS FACTORY OPTION
OR AS KIT THROUGH BOBCAT
PARTS (SEE PAGE 47 –
OPTIONS/ACCESSORIES)

									C	ompa	ct Exc	avator	'S							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Hydraulic Tilt Coupler, German System, TC03	7328428									Х	Х	Х								
Hydraulic Tilt Coupler, German System, TC03	7328429												Χ	Х						
Hydraulic Tilt Coupler, German System, TC03	7328430														Χ	Χ	Χ			
Hydraulic Tilt Coupler, German System, TC03	7328431																			>
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328432									Χ	Χ	X								
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328433												Χ	Х						
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328434														Χ	Χ	Χ			
Hydraulic Tilt Coupler, German System, TC03 with Lift Hook *	7328435)
Hydraulic Tilt Coupler, German System, TC08 with Lift Hook *	7328436																	X ¹		
Hydraulic Tilt Coupler, German System, TC08 with Lift Hook *	7458289																		Χ	
Tilt Coupler Hose Kit for E26/E27/E27z/E34/E35z/ E50z/E55z/E60	7330114									Х	Х	Х	Х	Х	Х	Х	Х			
Tilt Coupler Hose Kit for E57W/E85 Short Arm	7330115																	Χ		2
Tilt Coupler Hose Kit for E57W Long Arm	7330116																			
Tilt Coupler Hose Kit for E85 Long Arm	7330117																	Х		


^{*} Object handling option mandatory - available as machine option 'Hydraulic Quick Hitch Ready Kit not available for this machine model

^{*} Object handling option mandatory - available as machine option

COUPLER, MECHANICAL



PINS FOR THE ATTACHMENT TO BE **ORDERED SEPARATELY. PLEASE REFER**

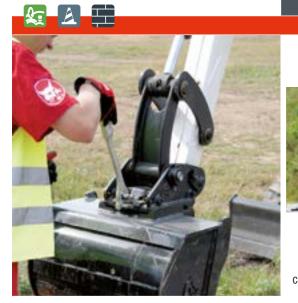



Klac™ System

- Our Klac quick-attach systems are specially designed for Bobcat compact excavators and offer a host of benefits.
- Dedicated compact coupler with automatic self-locking mechanism

Features & Benefits

- from the cab
- Unlocking of the attachment is made with a lever provided
 Easy bucket hook-with automatic centring.
 Wear compensation system to maximize lifetime.
 For the reversibility of your bucket, an adaptor bracket is available,

allowing you to use your bucket as a shovel.

German System Locks mechanically with automatic adjustment for reliable connection. Long lifetime with little maintenance thanks to sealed locking system.

- Complete range of couplers and adapters for all attachment types.
 Mechanical Pin Grabber
- Pin-on mount optimized for Bobcat excavators
 Lift eye facilitating transport of additional attachments around the
- jobsite

 Dedicated pick up dimensions for Bobcat attachments
- Dedicated release tool
 Design allows for reversed bucket pickup, enabling an even wider range of applications
 • Built in safety features

Coupler: No special requirement.

Description: These manual couplers let you change attachments quickly, easily and safely. Coupler systems turn excavators into tool-carriers. You can switch between different buckets and attachments in a matter of minutes. So you can always use the right tool for the right job, maximising efficiency and productivity.





German System



ALSO AVAILABLE AS FACTORY OPTION



Mechanical Pin Grabber

TECHNICAL SPECIFICATIONS							
Description	Part Number	Attachment Pin Diameter (mm)	Pin Center (mm)	Lift Eye Capacity (kg)	Weight (kg)	Control Kit Required	First Use Installation Time
Coupler Pin Grabber QC30 *	7422462	30	123	1000	20	No	None
Coupler Pin Grabber QC35 *	7422463	35	200	2500	35	No	None
Coupler Pin Grabber QC45 *	7422464	45	220	4750	53	No	None
Coupler Pin Grabber QC45 *	7422465	45	262,5	4750	55	No	None
Coupler Pin Grabber QC45 *	7422466	45	291	4750	73	No	None
Coupler Pin Grabber QC45 *	7458292	45	291	4750	77	No	None

^{*} Object handling option mandatory - available as machine option

COMPATIBILITY CHARTS																					
										C	ompa	ct Exc	avato	rs							
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Coupler Klac™ System Model C	7139694	16				Х	Χ	Χ	Х	Χ											
Coupler Klac™ System Model D	7180275	24									Χ	Х	Х	Х	Х						
Coupler Klac™ System Model E	7190553	40														Χ	Χ	Χ			
Coupler Klac™ System Model E	7171766	40																			X
Coupler Klac™ System Model F	7171769	70																	Χ		
Coupler Klac™ System Model F	7458290	70																		Χ	

										Coi	mpac	t Exc	cavat	tors							
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Coupler German System QC01 w/o lift hook	7319745	17.5				Х	Χ	Х	Х	Χ											
Coupler German System QC03 w/o lift hook	7319746	33.8									Χ	Χ	Χ	Χ	Χ						
Coupler German System QC03 w/o lift hook	7319747	36.2														Χ	Χ	Χ			
Coupler German System QC03 w/o lift hook	7319748	37.3																			Χ
Coupler German System QC01 with lift hook *	7320247	18.4				Χ	Χ	Χ	Χ	Χ											
Coupler German System QC03 with lift hook *	7320248	35.5									Χ	Χ	Χ	Χ	Χ						
Coupler German System QC03 with lift hook *	7320249	38.0														Χ	Χ	Χ			
Coupler German System QC03 with lift hook *	7320250	39.1																			Х
Coupler German System QC08 with lift hook *	7320251	74.5																	Χ		
Coupler German System QC08 with lift hook *	7458286	76																		Χ	
Coupler Pin Grabber QC30*	7422462	20	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ											
Coupler Pin Grabber QC35*	7422463	35									Χ	Χ	Χ	Χ	Χ						
Coupler Pin Grabber QC45*	7422464	53														Χ	Χ	Χ			
Coupler Pin Grabber QC45*	7422465	55																			Χ
Coupler Pin Grabber QC45*	7422466	73																	Χ		
Coupler Pin Grabber QC45*	7458292	77																		Χ	

^{*} Object handling option mandatory - available as machine option

01 1101107 1100200011120		
Description	Part Number	Weight (kg)
Klac [™] System C Adapter Plate, Weld-on to Convert Non-Klac [™] System Attachments to Klac [™] System Attachments	7140427	6
Klac [™] System D Adapter Plate, Weld-on to Convert Non-Klac [™] System Attachments to Klac [™] System Attachments	7140428	10
Klac [™] System E Adapter Plate, Weld-on to Convert Non-Klac [™] System Attachments to Klac [™] System Attachments	7140429	16
Klac [™] System F Adapter Plate, Weld-on to Convert Non-Klac [™] System Attachments to Klac [™] System Attachments	7140430	25



OPTIONS / ACCESSORIES																					
										Co	mpac	t Exc	cavat	ors							
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Klac™ System Reversible Adapter Model C	7207671	17				Χ	Χ	Χ	Χ	Χ											
Klac™ System Reversible Adapter Model D	7207672	29									Χ	Χ	Χ	Χ	Χ						
Klac™ System Reversible Adapter Model E	7207673	50														Χ	Χ	Χ			Χ
Klac™ System Reversible Adapter Model F	7207674	79																	Χ	Χ	

OPTIONS / ACCESSORIES																					
										Cor	прас	t Exc	avat	ors							
Description	Part Number	Weight (kg)	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Mechanical Pin Grabber Release Tool Kit QC30, QC35 (pack of 5)	7445841	1.35	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	Χ						



DID YOU KNOW? BOTH, THE PIN **GRABBER AND THE KLAC REVERSIBLE** ADAPTOR, ALLOW YOU TO REVERSE YOUR BUCKETS AND DIG CLOSE TO OR **UNDER EXISTING STRUCTURES**





COMPACT EXCAVATORS

COUPLER, MECHANICAL TILT



Description: The Bobcat Mechanical Tilt Coupler allows you to change attachments mechanically and rapidly. Coupler systems turn excavators into tool-carriers, switching between different buckets and attachments in a matter of minute. It combines all the benefits of a quick coupler with a tilt actuator. So you can always use the right tool for the job, maximizing efficiency and productivity.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Height (mm)	Width (mm)	Length (mm)	Overall Rotation (°)	Weight (kg)	Capacity (cm³)	Operating Pressure (bar)	Relief Pressure (bar)	Output Torque¹ (Nm)	Holding Torque (Nm)
Mechanical Tilt Coupler, German System, TC01	7328313	397	190	342	88 - 92	35.5	239	207	225	930	2260
Mechanical Tilt Coupler, German System, TC03	7328314	467	232	373	88 - 92	66.9	623	207	225	1630	6430
Mechanical Tilt Coupler, German System, TC03	7328315	496	232	420	88 - 92	82.8	936	207	225	2600	9350
Mechanical Tilt Coupler, German System, TC03	7328316	524	259	514	88 - 92	123.8	1262	207	225	4375	14850
Mechanical Tilt Coupler, German System, TC03	7328317	544	277	503	88 - 92	124.3	1262	207	225	4375	14850
Mechanical Tilt Coupler, German System, TC01 with Lift Hook *	7328318	423	194	342	88 - 92	37.1	239	207	225	930	2260
Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328319	483	232	397	88 - 92	68.6	623	207	225	1630	6430
Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328320	503	232	445	88 - 92	84.5	936	207	225	2600	9350
Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328321	560	259	534	88 - 92	125.6	1262	207	225	4375	14850
Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328322	561	277	565	88 - 92	126.1	1262	207	225	4375	14850
Mechanical Tilt Coupler, German System, TC08 with Lift Hook *	7328323	666	318	627	88 - 92	190.6	1950	207	225	6650	20450
Mechanical Tilt Coupler, German System, TC08 with Lift Hook *	7458288	670	325	570	88-92	196	1950	207	225	6650	20450
1.100=1											

¹at 207 bar



FOR E26, E27, E27Z, E34, E35Z, E50Z, E55Z, E60 AND E88, MACHINE TO BE EQUIPPED WITH AUX4 HYDRAULIC LINE FOR BEST PERFORMANCE



FOR M-SERIES EXCAVATORS, "ARM MOUNTED AUX2 WITH CAPS" OPTION IS NEEDED! AVAILABLE AS FACTORY OPTION OR AS KIT THROUGH BOBCAT PARTS

CO	MPATIBILITY CHARTS																				
		Doub								C	compa	ct Exc	avatoı	rs							
	Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
	Mechanical Tilt Coupler, German System, TC01	7328313				Χ	Χ	Χ	Χ	Χ											
	Mechanical Tilt Coupler, German System, TC03	7328314									Х	Х	Х								
	Mechanical Tilt Coupler, German System, TC03	7328315												Χ	Χ						
	Mechanical Tilt Coupler, German System, TC03	7328316														Χ	Χ	Χ			
	Mechanical Tilt Coupler, German System, TC03	7328317																			Χ
ı	Mechanical Tilt Coupler, German System, TC01 with Lift Hook *	7328318				Χ	Χ	Χ	Χ	Х											
0	Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328319									Х	Х	Χ								
	Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328320												Χ	Χ						
	Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328321														Х	Χ	Χ			
	Mechanical Tilt Coupler, German System, TC03 with Lift Hook *	7328322																			Х
	Mechanical Tilt Coupler, German System, TC08 with Lift Hook *	7328323																	Χ		
	Mechanical Tilt Coupler, German System, TC08 with Lift Hook *	7458288																		Х	
	Tilt Coupler Hose Kit for E17/E17z/E19/E20z	7330113				Χ	Χ	Χ	Χ	Χ											
ı	Tilt Coupler Hose Kit for E26/E27/E27z/E34/E35z/ E50z/E55z/E60	7330114									Х	Χ	Χ	Χ	Х	Χ	Χ	Χ			
2	Tilt Coupler Hose Kit for E57W/E85 Short Arm	7330115																	Χ		Χ
	Tilt Coupler Hose Kit for E57W Long Arm	7330116																			Χ
	Tilt Coupler Hose Kit for E85 Long Arm	7330117																	Χ		



^{*} Object handling option mandatory - available as machine option

FLAIL MOWER, SELF-LEVELLING





Features & Benefits

- Drum braking circuit stops the attachment within
- 12 seconds (machines E17-E60)
 Can use the Flail Mower while driving the machine (except for machine E57W)

 • Anti-shock, anti-cavitation and flow reducer

- Optimized for Bobcat machines
 Internal drainline Self-levelling feature for the simplicity of operation and maximum productivity
 Replaceable wear skids for long product life
 Knife and hammer options when available

- Replaceable cutting flails
 Direct power drive (no belts, chains or gearboxes) to provides optimum balance between torque and RPM
 Double skin flail head
- Roller to copy the surface

MX Flail Mower.

Self-levelling

Description: Shred vegetation on any terrain, inluding roadways or ditches, or clear out shrub and long grass from forgotten areas. With the help of the excavator's arm the flail mower can reach where other mowers could not (pylons, solar panels or beyond fences).

TECHNICAL SPECIFICATIONS								
Description	Part Number	Cutting width (mm)	Max. cutting diameter (mm)	Hydraulic flow range (I/m)	Number of Tools	Weight (kg)	Control Kit Required	First Use Installation Time
Self-levelling Flail Mower - SL FM 60 - Knives	7362763	600	20	16 - 38	32 knives	122	No	None
Self-levelling Flail Mower - SL FM 85 - Knives	7362767.KN	850	30	36 - 70	24 + 12 knives	181	No	None
Self-levelling Flail Mower - SL FM 85 - Hammers	7362767.HM	850	40	35 - 70	12 hammers	181	No	None
Self-levelling Flail Mower - SL FM 105 - Knives	7370709.KN	1050	30	50 - 85	32 +16 knives	200	No	None
Self-levelling Flail Mower - SL FM 105 - Hammers	7370709.HM	1050	40	50 - 85	16 hammers	200	No	None

COMPATIBILITY CHARTS																				
									C	ompa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Fixing Cap - Pin-on	7326812				Χ		Χ		Χ											
Fixing Cap - Klac C	7326848				Χ		Х		Х											
Fixing Cap - German system SW01	7326808				Χ		Χ		Χ											
Fixing Cap - Pin-on	7198350									Х	Χ	Χ	Χ	Х						
1 Fixing Cap - Klac D	7326847									Χ	Χ	Χ	Χ	Χ						
Fixing Cap - German system SW03	7198351									Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ			Х
Fixing Cap - Pin-on	7316692														Χ	Χ	Χ			
Fixing Cap - Pin-on	7318520																			Χ
Fixing Cap - Klac E	7316694														Χ	Χ	Χ			Χ
Self-levelling Flail Mower - SL FM 60 - Knives	7362763				Χ		Х		Х											
Self-levelling Flail Mower - SL FM 85 - Knives	7362767.KN									Χ	Χ	Χ	Χ	Χ						
2 Self-levelling Flail Mower - SL FM 85 - Hammers	7362767.HM									Χ	Χ	Χ	Χ	Χ						
Self-levelling Flail Mower - SL FM 105 - Knives	7370709.KN														Χ	Χ	Χ			Χ
Self-levelling Flail Mower - SL FM 105 - Hammers	7370709.HM														Х	Х	Χ			Х



THE EXCAVATOR NEEDS TO HAVE A CLOSED CAB FOR FLAIL MOWER

									(Compa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	F57W
Auxiliary Coupler Arm Kit - STD Arm **	7256189				Х		Х		Х											П
Auxiliary Coupler Arm Kit - Long Arm **	7256190						Χ		Х											
Auxiliary Coupler Arm Kit **	7358041									Χ										
Auxiliary Coupler Arm Kit **	7352638										Χ	Χ								
Auxiliary Coupler Arm Kit - STD Arm **	7209718												Χ	Χ						
Auxiliary Coupler Arm Kit - Long Arm **	7209717												Χ	Χ						
Hose Kit - Long Arm (E57W)	7385850																			Х
Direct to Tank Kit (E17/E19/E20z)	7362790				Χ		Χ		Х											
Direct to Tank Kit (E26/E27) **	7364258									Χ	Χ									
Direct to Tank Kit (E27z) **	7370663											Χ								
Direct to Tank Kit (E34) **	7364195												Χ							
Direct to Tank Kit (E35z) **	7370666													Χ						
Direct to Tank Kit (E50z/E55z/E60) **	7442143														Χ¹	Χ¹	Χ¹			
Direct to Tank Kit (E50z/E55z/E60) **	7441797														Χ2	Χ²	Χ²			

Options/accessories is based on the R-series excavators compatibility. (For other series compatibility please refer to your District Manager.)

¹Machines equipped with AUX4 ²Machines not equipped with AUX4

OPTIONS / ACCESSORIES		
Description	Part Number	Number of Tools
Drum with Knives for SL FM60	7371272	32 knives
Drum with Knives for SL FM85	7365661	24 + 12 knives
Drum with Hammers for SL FM85	7365662	12 hammers
Drum with Knives for SL FM105	7374909	32 + 16 knives
Drum with Hammers for SL FM105	7374910	16 hammers





AUXILIARY COUPLER ARM KIT ** REQUIRED FOR MACHINES WITH



COMPACT EXCAVATORS

B4501805-EN (01-25)

HYDRAULIC CLAMP





Features & Benefits

- Retractable when not in use No downtime.
- · Pick up and move broken concrete, tree stumps and other oddly shaped objects.
- · Hydraulically actuated.



ALSO AVAILABLE AS FACTORY OPTION

Hydraulic Clamp: Hose Kit included as standard. Need to order Hose Kit Extension + Clamp + Relief

Description: Use this handy hydraulic clamp with a trenching bucket or 3-tine grapple to get a good grip on broken concrete, tree stumps and other oddly shaped objects. When not needed, the clamp can be completely retracted onto the inside of the dipperstick and will not interfere with normal digging activities.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Overall Length (mm)	Number of Teeth	Relieve Kit (Required)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time*
Hydraulic Clamp, E17/E17z	7270440	594	2	Included in the Kit	38	No	Standard	2 h
Hydraulic Clamp, E19/E20z, for Long Arm Machine	7248489	550	2	Factory installed	27	No	Standard	1 h
Hydraulic Clamp, E19/E20z, for Short Arm Machine	7293706	550	2	Factory installed	27	No	Standard	1 h
Hydraulic Clamp, E26/E27/E27z, Standard Clamp	7208880	729	2	Factory installed	54	No	Standard	1 h
Hydraulic Clamp, E26/E27/E27z, Long Clamp	7267327	789	2	Factory installed	65	No	Standard	1 h
Hydraulic Clamp, E34/E35z, Standard Clamp	7180211	729	2	Factory installed	56	No	Standard	1 h
Hydraulic Clamp, E34/E35z, Long Clamp	7180215	827	2	Factory installed	65	No	Standard	1 h
Hydraulic Clamp, E50z/E55z/E60	7439584	861	2	Factory installed	97	No	Standard	1 h
Hydraulic Clamp, E57W	7322563	861	2	Factory installed	101	No	Standard	2 h
Hydraulic Clamp, E85, Standard Clamp	7174232	1004	2	Factory installed	120	No	Standard	1 h
Hydraulic Clamp, E85, Long Clamp	7174244	1174	2	Factory installed	136	No	Standard	1 h
Hydraulic Clamp, E88	7445460	1177	2	Factory installed	126	No	Standard	1 h

^{*}If machine is not equipped with clamp eye, 1 h extra for installation is required

COMPATIBILITY CHARTS			To Eit -	Cuolom									Care		ė Eur		to se							
	Part		10 Fit on	System		L							Con	прас	TEX	cava	tors			_				
Description	Number	Pin-0n	Klac [™] System	German System	Pin Grab	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E82	E88	E57W
Hydraulic Clamp, E17/E17z	7270440	Χ	Х	Χ					X	Χ														
Hydraulic Clamp, E19/E20z, for Long Arm Machine	7248489	Х	Х	Х							Χ	Χ	Χ											
Hydraulic Clamp, E19/E20z, for Short Arm Machine	7293706	Χ	Х	Χ							Χ	Χ	Χ											
Hydraulic Clamp, E26/E27/E27z, Standard Clamp	7208880	Х												χ1	Χ	Χ								
Hydraulic Clamp, E26/E27/E27z, Long Clamp	7267327		Χ	Х	Χ									χ1	Χ	Χ								
Hydraulic Clamp, E34/E35z, Standard Clamp	7180211	Х															Χ	Χ						
Hydraulic Clamp, E34/E35z, Long Clamp	7180215		Χ	Χ	Χ												Χ	Χ						
Hydraulic Clamp, E50z/E55z/E60	7439584	Х	Х	Χ															Χ	Χ	Χ			
Hydraulic Clamp, E57W	7322563	Χ	Χ	Χ																				χ²
Hydraulic Clamp, E85, Standard Clamp	7174232	Х		Χ																		Χ		
Hydraulic Clamp, E85, Long Clamp	7174244		Х																			Χ		
Hydraulic Clamp, E88	7445460		Х	Х	Х																		Χ	

¹Clamp mount kit needed - 7357150 ** ²Clamp mount kit needed - 7015627 **

56

** To be ordered through Bobcat Parts




LASER EQUIPMENT



Description: The laser equipment offers the most innovative features to help you get to grade faster with increased accuracy. For efficiency and productivity, change and control the functions of the transmitter with the remote, from the comfort of your cab. The Automatic Axis Alignment eliminates the need to manually align the laser to your grade hub, giving you an accurate result each

TECHNICAL SPECIFICATIONS										
Description	Part Number	Туре	Radio Remote	Temperature Compensation	Auto Axis Alignment	Range (Diameter)	Accuracy	Weight (kg)	Control Kit Required	First Use Installation Time
Laser Transmitter, Dual Slope, GL722*	6680073	Dual Slope	Yes	Yes	Yes	900 m	4.6 arc sec	8.5	No	None

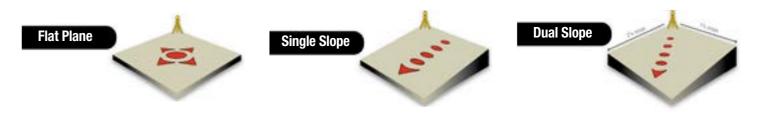


COMPATIBILITY CHARTS																				
									(Compa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Laser Transmitter, Dual Slope, GL722 *	6680073	Х	Χ	Х	Х	Х	Χ	Χ	Χ	X	Х	Χ	Χ	Χ	Χ	Х	Х	Х	X	Х

^{*} Tripod needed for accurate depth control. See in Accessories.

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
Tripod	6688806	6

PLATE COMPACTOR

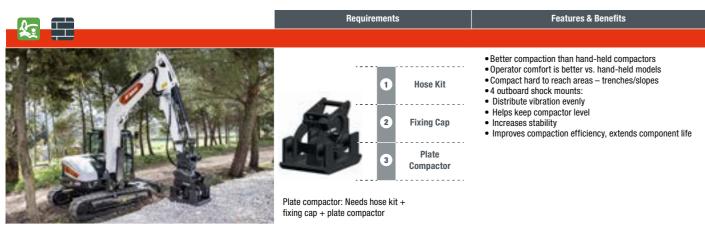

Description: Mounted at the end of the excavator boom, the plate compactor can reach the bottom of trenches. This tool can also drive piles when building retaining walls. This attachment allows you to quickly handle a project requiring compaction with no need for a laborer in the trench with a hand-operated compactor. It is an alternative to a walk behind unit or remote-controlled roller compactors.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (mm)	Centrifugal force (kN)	Min. flow (I/min)	Frequency (vib/min)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
PCF34 Plate Compactor	7211623	476	15.4	49	2100	216	No	Standard	1.5 h
PCF64 Plate Compactor	7210256	570	28.5	49	2000	388	No	Standard	1.5 h

COMPATIBILITY CHARTS																				
									(Compa	ct Exc	avator	S							
Description	Part Number	E08	E10z	E10e	E17	E172	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
Hose Kit for Long Arm Machine	7217834												Χ	Χ	Χ	Χ				
1 Hose Kit E50z, E55z, E60, E57W	7217835												Χ	Х	Х	Χ	Χ			
Hose Kit	7217836																	Χ	Χ	
Fixing cap, Pin On	7198350												Χ	Х						
Fixing cap, Klac D	7326847												Χ	Χ						
Fixing cap, German System QC03	7198351												Χ	Х	Х	Χ	Χ			Х
Fixing cap, Pin On	7316692														Χ	Χ	Χ			
2 Fixing cap, Pin On	7318520																			Х
Fixing cap, Klac E	7316694														Χ	Χ	Χ			Χ
Fixing cap, Pin On	7361092																	Х	χı	
Fixing cap, Klac F	7318949																	Χ	Χ	
Fixing cap, German System QC08	7316698																	Х	Х	
PCF34 Plate Compactor	7211623												Χ	Χ	Χ	Χ	Χ			
PCF64 Plate Compactor	7210256																	Х	Χ	

¹Pin grabber needed for E88 compatibility







ATTACHMENT: SUPERCHARGER

CHARGE UP YOUR ELECTRIC EXCAVATORS WITH THIS SUPERCHARGER

- Designed to accommodate different battery types.
- For ease of use, it can be used as a portable power supply.
- Ideal for machines that need fast charging and increased battery life cycle.

SUPERCHARGER



Features & Benefits

- Stainless steel housing prevents corrosion in outdoor applications
- Ventilation ports to avoid overheating
 Microprocessor for various device connections and
- Microprocessor for various device connections and battery types

 Memory accommodates 1000 charging cycles and secures them, giving a complete analysis of the battery behavior and the respective usage

 Adjustments can be made in the programmable display battery type, charging profile and battery capacity

 Portable and compact design makes moving it around the inhelites effortlese.
- jobsites effortless

SuperCharger: No special requirements.

Description: An electric charger optimized for your new E10e and E19e. Thanks to the precise engineering design with our Bobcat electric excavators in mind, this charger offers optimized charge time while meeting all the machines' requirements for increased battery life.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Input Voltage (VAC)	Input Frequency (Hz)	Output Voltage (VDC - Nominal)	Output Voltage Accuracy (%)	Cord length (m)	Connector (output)	Connector (input)	Operating temperature (° C)	Weight (kg)
SuperCharger	7354436	400	50 - 60	48	± 0.5	3	SBX175	3P + N + PE	-30 to +70	80

COMPATIBILITY CHARTS																				
	_								C	Compa	ct Exc	avator	s							
Description	Part Number	E08	E10z	E10e	E17	E17z	E19	E19e	E20z	E26	E27	E27z	E34	E35z	E50z	E55z	E60	E85	E88	E57W
SuperCharger	7354436			Χ				χ												







COMPACT LOADERS

BOBCAT LOADER + BOB-TACH™ = A WINNING COMBINATION


Thanks to 75 hard-working, job-matched attachments, your Bobcat loader is truly cost effective. Each attachment is designed and manufactured to fit perfectly with the base machine for optimum job performance, dependability and durability. That's real value. That's the Bobcat Attachment Advantage.

► THE BOB-TACH™ SYSTEM FOR FAST, SECURE ATTACHMENT CHANGES

Bobcat attachments are secured using the Bob-Tach[™] coupler – copied by many, never equalled. The Bob-Tach[™] system for fast, secure attachment changes. Thanks to its unique and simple design, you can replace a bucket with pallet forks, a landscape rake, a backhoe, or a sweeper within minutes using the Bob-Tach[™] mounting system.

The Power Bob-Tach is a hydraulic version enabling you to connect and disconnect an attachment from the comfort of your cab. In EMEA, we have over 200 Bobcat Dealers and 148 Bobcat Sub-dealers at your service.


▶ EXCLUSIVE BOB-TACH™ SYSTEM (BT)

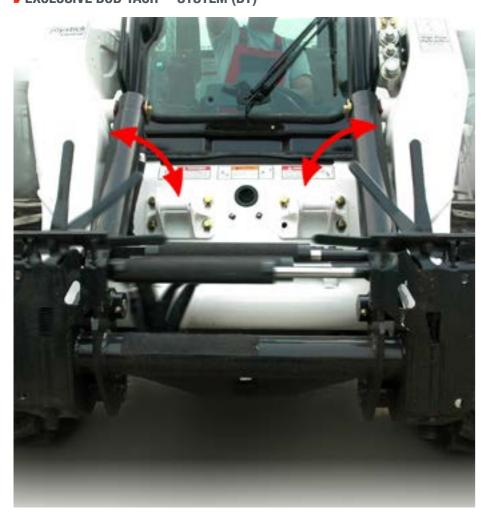

► CHANGE ATTACHMENTS WHILE SITTING COMFORTABLY

The Bob-Tach[™] mounting system allows you to change attachments quickly while working on-site. And, with the optional Power Bob-Tach[™], you can change non-hydraulic attachments without even Exclusive Bob-Tach[™] System (BT) leaving the cab. Activated by a switch in the centre panel, the Power Bob-Tach[™] levers can be raised and lowered hydraulically, increasing the versatility and productivity of all Bobcat compact loaders.





Bob-Tach™ frame (A) moves into attachment flange (B); handle (C) pushes down easily, pressing wedge (D) through frame and attachment hole for solid connection.




QUICK COUPLERS — WITH PRESSURE RELEASE



QUICK COUPLERS (WITH PRESSURE RELEASE)

This unique design ensures that hydraulic attachment changes go quickly and smoothly. But trapped line pressure can make attachment changes anything but quick.

So Bobcat loaders come with a handy feature to release trapped pressure. By simply pushing the coupler inward, the hydraulic oil is released through a return line back into the machine. The result: clean, quick attachment changes, time after time.





INCREASE YOUR PRODUCTIVITY UP TO 15-20% WITH THE SUPER FLOW 8X LOADERS


- ▶ The Super Flow option increases hydraulic efficiency and auxiliary performance to 159 l/min @ 28 MPa
- ▶ This new flow technology will change your loader into the most powerful carrier
- **>** Super Flow increases your performance in forestry, snow removal, and road maintenance applications.
- ▶ The 8X loaders have a new 5-coupler block allowing the use of larger ¾" quick coupler connectors for increased efficiency and performance
- Try now with our forestry cutters and self-levelling planers!

MORE INFO ON WWW.BOBCAT.COM

66 2025/2026 <mark>67</mark>

ANGLE BROOM



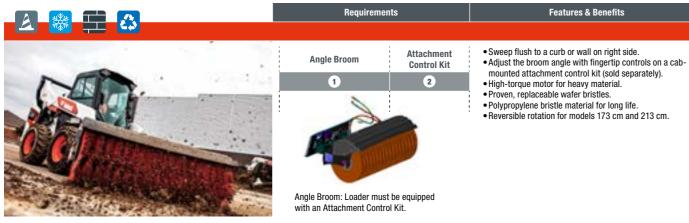

Description: Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farmyards or warehouses, you can depend on the angle broom to get the job done right.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Sweeping Width (mm)	Sweeping Width Fully Angled (mm)	Brush Diameter (mm)	Number of Bristle Sec- tions (zigzag - straight)	Degree of Angle	Flow Range (I/min)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Angle Broom, Reversible, 132 cm (ACD) ¹	M7043*4891347	1308	1200 @ 25°	660	27 - 0	± 25° (hydr. cyl.)	34 - 45	161	Yes	Standard / High Flow	None
Angle Broom, Reversible, 173 cm (ACD)	7337703	1727	1600 @ 25°	813	34 - 2	± 25° (hydr. cyl.)	30 - 121	390	Yes	Standard / High Flow	None
Angle Broom, Reversible, 213 cm (ACD)	7337715	2134	1956 @ 25°	813	44 - 2	± 25° (hydr. cyl.)	57 - 106	428	Yes	Standard / High Flow	None

'coming standard with 14-Pin – when used on loaders equipped with a 7-Pin Attachment Control Kit, a 7-Pin Attachment T-Harness Kit is required - 7413216 **


CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	c Load	ers						S	kid-S	teer L	.oader	s				
	Description	Part Number	MT100	T450	Н/0651	Н/991	H/9/1	H/0//T	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Angle Broom, Reversible, 132 cm (ACD) ¹	M7043*4891347	Х							Х												
0	Angle Broom, Reversible, 173 cm (ACD)	7337703		Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	
	Angle Broom, Reversible, 213 cm (ACD)	7337715			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as	standard on High Flo	w (H)	machi	nes.																	
	7-Pin Attachment Control Kit **	6733142									Χ											
2	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
	7-Pin Attachment Control Kit **	7128426			Χ	Χ		Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		

OPTIONS / ACCESSORIES																						
		Compact Track Loaders							Skid-Steer Loaders													
Description	Part Number	MT100	T450	Т590/Н	Н/991	Т650/Н	Н/9/1	Н/0//1	T86/H/S	870	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/92S	S770/H	S/H/98S
Spray Nozzle Kit **	7113709		Х	Х	Х	Х	Х	Х	Х		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х







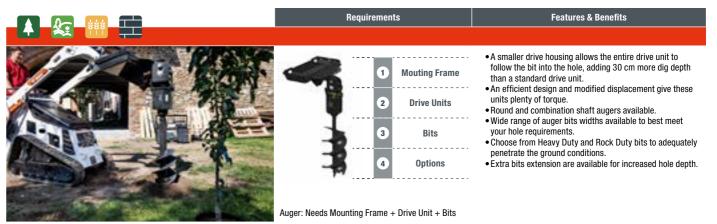

Description: Speed and perfect vertical accuracy are what you get with this high-torque, heavy-duty hydraulic auger. Its unique "knuckle-joint" design allows it to hang perfectly vertical, on flat or uneven terrain. The entire drive unit follows the bit into the hole, adding 30 cm more dig depth than a standard unit. This is the ideal tool for drilling holes for posts, piers, poles and trees in all kinds of soil conditions. Choose from 3 types of bits to best suit the ground conditions (standard, heavy duty and rock) and a multitude of widths to best meet your hole width requirement.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Auger Bit Type	Digging Depth (mm)	Max. Operating Pressure (bar)	Torque @ Max. Pressure (Nm)	Max. Speed (RPM) @ Max. Rated Flow (I/min)	Delivered with Pin for Auger Bit	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
High Torque Auger 35PH Drive	7220280	Hex	1829	241	5644 @ 241	98 @ 144	HEX	131	No	Standard / High Flow	0.5 h
High Torque Auger 50PH Drive	7227984	Hex	1829	241	7175 @ 241	77 @ 144	HEX	131	No	Standard / High Flow	0.5 h


COMPATIBILITY CHARTS																					
		Compact Track Loaders								Skid-Steer Loaders											
Description	Part Number	MT100	T450	T590/H	Т66/Н	H/9/1	H/0/71	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
Mounting Frame High Torque Auger	7223507			Х	Χ	Х	Х	Χ				Х	Х	Χ	Χ	Х	Х	Х	Х	Х	Χ
High Torque Auger 35PH Drive	7220280			Х	Χ	Х	Χ	Х				Х	Х	Χ	Х	Х	Χ	Х	Х	Х	Χ
High Torque Auger 50PH Drive	7227984			Χ*	Χ	Χ	Χ	Χ						Х*	Χ*	Χ	Χ	Χ	Χ	Χ	Χ

* High flow machines only


CO	MPATIBILITY CHARTS				
	Description	Part Number	High Torque Auger 35PH	High Torque Auger 50PH	Weight
	High Torque Auger Bit HEX 20 cm HD **	7243233	X	X	47 kg
	High Torque Auger Bit HEX 30 cm HD **	7243234	X	X	53 kg
	High Torque Auger Bit HEX 46 cm HD **	7243235	X	X	68 kg
	High Torque Auger Bit HEX 61 cm HD **	7243236	X	X	83 kg
	High Torque Auger Bit HEX 76 cm HD **	7243237	X	X	123 kg
3	High Torque Auger Bit HEX 91 cm HD **	7243238	X	X	151 kg
3	High Torque Auger Bit HEX 122 cm HD **	7243239	X	X	215 kg
	High Torque Auger Bit HEX 20 cm ROCK **	7243240	X	X	48 kg
	High Torque Auger Bit HEX 30 cm ROCK **	7243241	X	X	54 kg
	High Torque Auger Bit HEX 46 cm ROCK **	7243242	X	X	70 kg
	High Torque Auger Bit HEX 61 cm ROCK **	7243243	X	X	87 kg
	High Torque Auger Bit HEX 76 cm ROCK **	7243244	X	X	128 kg

** To be ordered through Bobcat Parts

TECHNICAL SPECIFICATIONS												
Description	Colour	Bit Type	Length (mm)	Flight								
Auger Bit, Heavy Duty	Orange	Hex Drive	1067	Single								
Auger Bit, Rock	White	Hex Shaft	1067	Single								

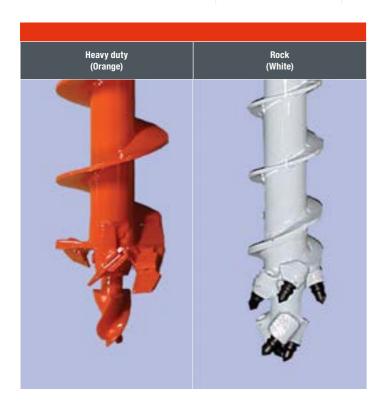

OPTIONS / ACCESSORIES												
Description	Part Number	Weight (kg)	Comments									
High Torque Auger Extension, 120 cm **	7243729		20 cm bits will not allow the extension to telescope, only works in the top position									

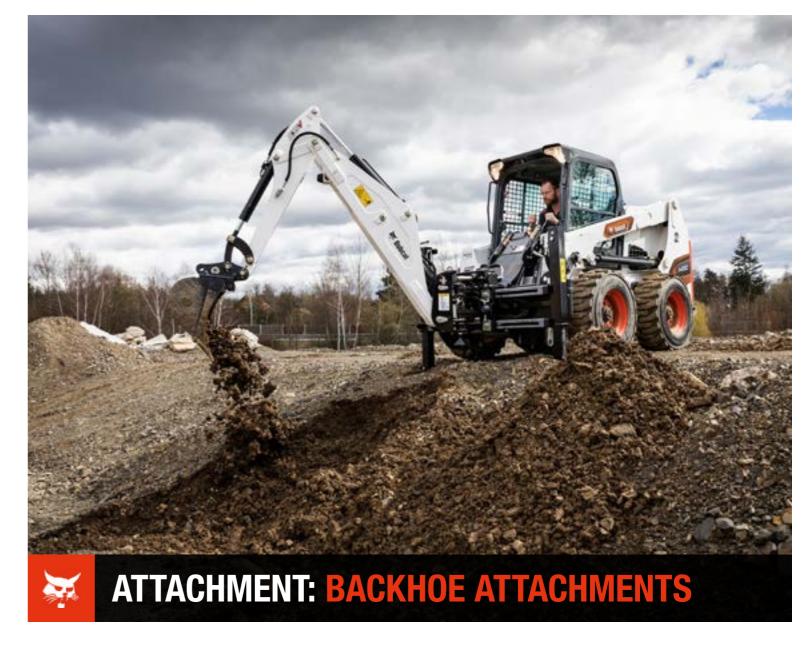

CONVERT YOUR LOADER INTO A POWERFUL EXCAVATOR WITH OUR NEW GENERATION OF BACKHOE ATTACHMENTS

- Double acting auxiliary line as standard on the V (Versatile) models enabling the use of hydraulic attachments
- ► KlacTM coupling as standard on V models
- Dedicated bucket offering for S (Standard) models
- Lighter than previous model, providing greater stability
- ▶ Hoses inside the boom and arm to extend the attachment's lifetime
- Safety features on stabilizers and control box

Learn more on page 72.


MORE INFO ON WWW.BOBCAT.COM

70 2025/2026 71

** To be ordered through Bobcat Parts

COMPACT LOADERS B4501805-EN (01-25)

BACKHOE

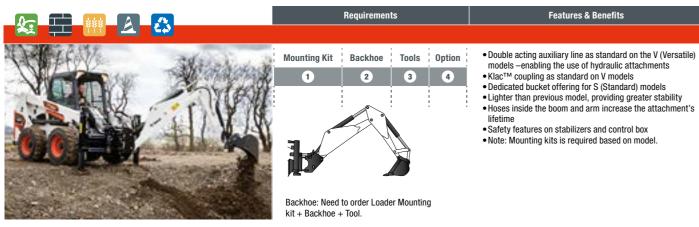

Description: Transform your Bobcat loader into a powerful, efficient, and versatile excavator with a Bobcat backhoe. This attachment makes your excavating loader the perfect partner for land-scaping and nursery work, sewage systems and septic tanks, water and power lines and many other jobs.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Digging Depth (mm)	Bucket Cylinder Force (daN)	Arm Cylinder Force (daN)	Digging Reach (mm)	Hook-up System	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Backhoe, B32V	7396283	3095	1600	1134	3927	Klac™	735	No	Standard	None
Backhoe, B35V	7400303	3332	1600	1480	4057	Klac™	820	No	Standard	None
Backhoe, B32S *	7416547	2998	1600	1134	3830	Pin-on *	710	No	Standard	None
Backhoe, B35S *	7416552	3235	1600	1480	3960	Pin-on *	795	No	Standard	None

CC	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0//T	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
	Loader Mounting Kit, B32V, B32S - 400 Series	7403190		Х								Х										
1	Loader Mounting Kit, B32V, B32S - 500 Series	7403191			Χ								Χ	Χ	Χ	Χ						
ľ	Loader Mounting Kit, B35V, B35S - 600 Series	7403192																Χ	Χ			
	Loader Mounting Kit, B35V, B35S - 700 Series	7403193						Χ													Χ	
	Backhoe, B32V	7396283		Χ	Χ							Χ	Χ	Χ	Χ	Χ						
2	Backhoe, B35V	7400303						Χ										Χ	Χ		Χ	
	Backhoe, B32S *	7416547		Χ	Χ							Χ	Χ	Χ	Χ	Χ						
	Backhoe, B35S *	7416552						Χ										Χ	Χ		Χ	

COMPATIBILITY CHARTS							
Description	Part Number	Weight (kg)	Capacity (I)	Backhoe B32 V	Backhoe B35V	Backhoe B32S	Backhoe B35S
Auger, 15C Unit Drive **	6809442	106	-	Х	Х		
Auger, 15H Unit Drive **	7145345	91	-	Х	Х		
Breaker HB680 **	7113419	150	-	Х	Х		
3 Clay Spade Bucket, 25 cm, Klac™, System D	7195717.K	50	-	Х	Х		
Clay Spade Bucket, 30 cm, Klac™, System D	7195728.K	54	-	Х	Х		
Clay Spade Bucket, 35 cm, Klac™, System D	7195731.K	57	-	Х	Х		
Clay Spade Bucket, 40 cm, Klac™, System D	7196097.K	60	-	Х	Х		

^{*} S-models available with dedicated pin-on style coupling.



COMPATIBILITY CHARTS							
Description	Part Number	Weight (kg)	Capacity (I)	Backhoe B32V	Backhoe B35V	Backhoe B32S *	Backhoe B35S *
Grading Bucket, STD, 120 cm, Klac™, System D	7143789	112	105	Х	Х		
Grading Bucket, STD, 140 cm, Klac [™] , System D	7138642	129	129	Х	Х		
Digging Bucket, STD, 23 cm, Klac [™] , System D	7150069	48	27	Х	X		
Digging Bucket, STD, 25 cm, Klac [™] , System D	7138636	49	34	Х	Х		
Digging Bucket, STD, 30 cm, Klac [™] , System D	7138637	54	43	Х	Х		
Digging Bucket, STD, 40 cm, Klac™, System D	7138638	60	61	Х	Х		
Digging Bucket, STD, 50 cm, Klac™, System D	7138639	67	81	Х	Х		
Digging Bucket, STD, 60 cm, Klac™, System D	7138640	71	100	Х	Х		
Digging Bucket, STD, 70 cm, Klac™, System D	7138641	78	119	Х	Х		
Digging Bucket, STD, 80 cm, Klac™, System D	7150071	85	136	Х	Х		
Digging Bucket, HD, 30 cm, Klac™, System D	7235042.K	59	40	Х	Х		
Digging Bucket, HD, 40 cm, Klac™, System D	7235054.K	69	60	Х	Х		
Digging Bucket, HD, 45 cm, Klac™, System D	7235056.K	74	70	Х	Х		
Digging Bucket, HD, 50 cm, Klac™, System D	7235058.K	78	80	Х	Х		
Digging Bucket, HD, 60 cm, Klac™, System D	7235060.K	89	100	Х	Х		
Digging Bucket, HD, 70 cm, Klac™, System D	7235062.K	100	120	Х	Х		
Digging Bucket, HD, 75 cm, Klac™, System D	7235094.K	104	131	Х	Х		
Digging Bucket, HD, 80 cm, Klac™, System D	7235064.K	109	140	Х	Х		
Digging Bucket, HD, 90 cm, Klac™, System D	7158700.K	120	162	Х	Х		
Skeleton Bucket, 70 cm, Klac™, System D	7189656.K	115	-	Х	Х		
Skeleton Bucket, 80 cm, Klac™, System D	7189657.K	127	-	Х	Х		
Skeleton Bucket, 90 cm, Klac™, System D	7189658.K	139	-	Х	Х		
Tilt Bucket, 105 cm, Klac™, System D	7184277.K	168	120	Χ	Χ		
Tilt Bucket, 120 cm, Klac™, System D	7184278.K	179	139	Х	Х		
Digging Bucket, STD, 30 cm	7423374	39	32			Х	Х
Digging Bucket, STD, 45 cm	7423375	49	47			Х	Х
Digging Bucket, STD, 60 cm	7423376	59	78			Х	Х
Grading Bucket, STD, 100 cm	7423377	62	86			Х	Х

OPTIONS / ACCESSORIES																					
			Co	mpact	Track	Load	ers						٤	kid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/9/S	N/077S	S/H/98S
Rear Stabilizers Mounting Kit	7152508		Χ	Χ							Χ	Χ	Χ	Χ	Х		Χ	Х			
Rear Stabilizers Mounting Kit	7152512						Χ													Χ	
Rear Stabilizers	6811449 **		Χ	Χ			Χ	Χ			Χ	Χ	Χ	Χ	Χ		Χ	Χ		Χ	X

OPTIONS / ACCESSORIES		
Description	Part Number	Weight
Rear Auxiliary Line Kit 400 Series **	7249869	35
Rear Auxiliary Line Kit 500 Series **	7229294	35
Rear Auxiliary Line Kit 600 Series **	7231436	45
Rear Auxiliary Line Kit 700 Series **	7220912	55

2025/2026 **73**** To be ordered through Bobcat Parts

For compatible buckets, please refer to the compatibility chart.

^{**} Fixing cap, hose kit & accessories are also required for installation.

Please refer to the Auger & Breaker pages in the catalogue for further details.

BALE FORK





Features & Benefits

Forks

- The two spikes can stabilise the load.
- The bale forks mount very quickly to the Bobcat® pallet fork frame attachments.
- In between spacing can be easily adjusted.

Bale Fork: Need Mounting Frame and Forks.


Description: The pair of small diameter forks offer benefits over a single fork. They stabilise the load by balancing round bales and securing uneven bales.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Frame Width (cm)	Frame Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Pallet Fork Frame, Standard Duty	7297499.T	114.5	55	No	Standard	0.25 h
Pallet Fork Frame, Heavy Duty	7294305.T	114.5	69	No	Standard	0.25 h
Pallet Fork Frame, Severe Duty	7294332.T	130.7	103	No	Standard	0.25 h

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	Н/991	Н/9/1	H/0//T	T86/H/S	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	Н/9/S	N/077S	S/H/98S
	Pallet Fork Frame, Standard Duty	7297499.T		Χ	Х	Χ	Х		Χ		Χ	Χ	Χ	Χ	Х	Χ	Χ	Χ	Χ	Χ		χ
1	Pallet Fork Frame, Heavy Duty	7294305.T		Χ	Х	Χ	Χ		Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		Χ
	Pallet Fork Frame, Severe Duty	7294332.T		Χ	Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
2	Bale Forks, Set of 2	6815781		Χ	Χ	Χ		Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		Χ	



BOX BLADE

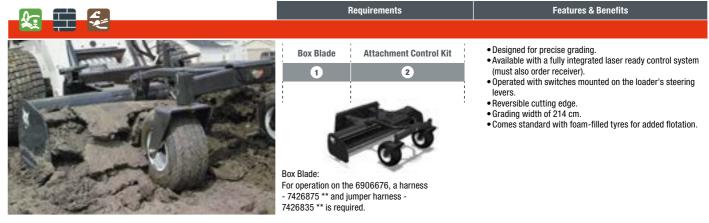

Description: The laser box blade is designed for precise grading and has a grade accuracy of 6 mm. The box blade without laser is intended for rough grading and landscaping applications. Both heavy duty box blades have a 214 cm grading width and a reversible cutting edge for longer life.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (mm)	Blade Width Fully Angled (mm)	Blade Cutting Edge (reversible) (mm)	Grade Accuracy with Laser (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Box Blade, 214 cm	6906574	2140	2134	12.7 × 152	-	463	No	Standard	0.25 h
Box Blade, 214 cm, with Laser Mounting	6906676	2140	2134	12.7 × 152	± 6	481	Yes	Standard	0.25 h

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	lers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	Т66/Н	Н/9/1	Н/0//1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/9/S	S770/H	S/H/98S
	Box Blade, 214 cm	6906574		Х	Х	Х	Х						Χ	Х	Х	Х	Х	Х	Х	Х	Х	Χ
1	Box Blade, 214 cm, with Laser Mounting * Laser Receiver, LR410	6906676 7436330		Х	Х	Х	Х						Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Fl	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	7128426			Χ								Χ	Χ	Χ	Χ		Χ	Χ		Χ	
2	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7229102		Х								Χ										
	7-Pin Attachment Control Kit **	7446894							Х													Χ

^{*} Harnesses (7426875** and 7426835**) are required for operation

OPTIONS / ACCESSORIES	
Description	Part Number
Laser Transmitter, Dual Slope, Trimble GL722	6680073
Laser Receiver, LR410	7436330
Tripod	6688806

BOX BLADE, HD



equirements Features & Benefits

 Wheels at the rear enable operation in tight spaces while also improving travel and stability.

 Dual-sided cutting edge allows the operator to push or pull material in either direction. Operating in reverse covers tracks for a smooth finish.

 The blade can tilt up to 20 cm to better maneuver the material loads and side angles.

Built to last - high quality standard, rugged finish.

Plug & Play – integrated Bobcat solution, can be installed on Bobcat loaders within a minute.

 Bolt-on cutting edges - hardened steel, removable, replaceable, and adjustable providing a long product life.

Compatible with 2D and 3D grading solutions.

HD Box Blade: Loader must be equipped with an Attachment Control Kit.

Description: The HD Box Blade is intended for rough grading operation, with the use of compatible laser receivers, you can achieve precision grading. Level ground effortlessly for surface preparation jobs, car parks, or landscaping projects. With its compact design you can also grade in corners, around pillars or walls easily.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (mm)	Max Oscillation Angle	Max Depth Below Grade (mm)	Max Height Above Grade (mm)	Weight (kg)	Control Kit Required	Working Flow
HD Box Blade	7357063	2134	±8°	107	224	628	Yes	Standard

CO	MPATIBILITY CHARTS																					
				Con	npact	Track	(Load	lers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Н/0651	Н/991	H/9/1	H/0/71	S/H/981	S70	S100	S450	S510/H	S530/H	S550/H	H/065S	Н/998	S630/H	S650/H	H/9/S	N/0778	S/H/98S
1	HD Box Blade	7357063			Χ	Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Fl	ow (H)	machi	ines.																	
2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
2	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES	
Description	Part Number
Laser Transmitter, Dual Slope, Trimble GL722	6680073
Laser Receiver, LR410	7436330
LR410 Mount Receiver Kit for HD Box Blade	7436108
Tripod	6688806

Note: For laser grading application two LR410 receivers are needed.





BREAKER



1 Hose Kit

2 Mounting (Bolt-on frame & fixing cap or fixing cap alone)

3 Breaker

4 Tool (Optional)

Breaker includes: Nail Point, fixing cap bolts, gauge tool and hose protector. Special Application Kit must be installed on the machine.

The cylindrical design improves access to jobs in confined areas, providing accurate attachment operation in more operating environments.

Features & Benefits

- Upper and lower shock absorbers isolate the breaker from the housing, reducing noise and vibration to deliver operator comfort without sacrificing performance. Silenced standard for all breaker models.
- Diaphragm-type accumulators reduce maintenance by preventing slow leaks.
 Long-life breakers designed for all demolition jobs with minimal
- maintenance.

 The innovative steel ring feature allows retaining the tool bushing, protecting the grease access and provides a quick tool change
- protecting the grease access and provides a quick tool change solution.

 Designed for minimum downtime and with few service parts
- to reduce operation cost and improve overall lifetime of the attachment.
- Bobcat breakers produce low recoil and minimal hydraulic pressure spike to their carriers.

Description: Bobcat breakers offer high performance, low maintenance, and are easy to use. All breakers feature a frame with a cylindrical design, providing improved access to jobs in confined areas. All breakers have a silenced housing as standard.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Flow (I/min)	Blow Rate - Soft Ground (beats/min)	Blow Rate - Hard Ground (beats/min)	Operating Pressure (bar)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Breaker, HB580	7113418	17 - 35	1220	1350	120	111	No	Standard	2 h
Breaker, HB680	7113419	25 - 50	1220	1340	120	150	No	Standard	2 h
Breaker, HB880	7113420	30 - 65	1150	1310	120	220	No	Standard	2 h
Breaker, HB980	7113421	40 - 75	855 - 1060	1170 - 1450	120	280	No	Standard	2 h
Breaker, HB1180	7115923	55 - 100	680 - 1070	820 - 1280	125	372	No	Standard	2 h
Breaker, HB1380	7157576	70 - 120	780 - 1030	900 - 1230	125	385	No	Standard	2 h
Breaker, HB2380	7133203	75 - 125	690	910	130	405	No	Standard	2 h

GUI	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	ers						S	kid-S	teer L	.oadei	s				
	Description	Part Number	MT100	1450	Т590/Н	Н/991	Н/9/1	Н/07/1	S/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	H/059S	H/9LS	H/077S	S/H/98S
a	Hose Kit	6727411	Χ							Χ												
ď	Hose Kit	7114764		Χ	Χ	Χ	Χ	Χ	Χ		Χ	Χ	Χ	Χ	Χ	Х	Х	Χ	Χ	Χ	Χ	Х
	Bolt-on Mounting Frame	7113736.EA	Χ							Χ												
2	Bolt-on Mounting Frame for HB880, HB980	7113737.EA		Χ	Χ	Χ	Χ	Χ	Χ		Χ	Χ	Χ	Χ	Х	Х	Χ	Χ	Χ	Χ	Χ	Х
	Bolt-on Mounting Frame for HB1180, HB1380, HB2380	7115937.EA					Χ	Χ	Χ									Χ	Χ	Х	Х	Х
	Breaker, HB580	7113418								Χ												
	Breaker, HB680	7113419	Χ							Χ												
	Breaker, HB880	7113420		Χ	Χ	Χ					X ¹	Χ	Χ	Χ	Х	Х	Х					
3	Breaker, HB980	7113421		Χ	Χ	Χ	Χ	Χ	Χ		X ²	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Breaker, HB1180	7115923					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Х
	Breaker, HB1380	7157576						Χ	Χ												Χ	Х
	Breaker, HB2380	7133203						Χ	Χ												Χ	Х

¹Loader with SJC needs to be equipped with 86626512 **


 $^{2}\text{Loader}$ with SJC needs to be equipped with 86637816 **




BRUSHCATTM ROTARY CUTTER











OPTIONS/ACCESSORIES								
Description	Tools Selection	HB580	НВ680	HB880	НВ980	HB1180	HB1380	HB2380
InLine Wide Chisel *	Α	7144668	7144678	7144693	7144704	7144715	7163372	7144725
Nail Point *	В	7144665	7149302	7144690	7144701	7144712	7163369	7144722
CrossCut Asphalt Chisel *	С	7144669	7144679	7144694	7144705	7144716	7163373	7144726
InLine Chisel **	D	7144664	7144674	7144689	7144700	7144711	7163368	7144721
Blunt Point *	E	7144671	7144681	7144696	7144707	7144718	7163375	7144728
Tamping Pad and Tool *	F	7144672	7144682	7144697	7144708	7144719	Х	Х
CrossCut Chisel *	G	7144663	7144673	7144688	7144699	7144710	7163367	7144720
Conical Point *	Н	7144666	7144676	7144691	7144702	7144713	7163370	7144723
CrossCut Wide Chisel *	I	7144667	7144677	7144692	7144703	7144714	7163371	7144724
InLine Asphalt Chisel *	J	7144670	7144680	7144695	7144706	7144717	7163374	7144727

OPTIONS/ACCESSORIES									
Description	Dimension	Tools Selection	HB580	НВ680	НВ880	НВ980	HB1180	HB1380	HB2380
In-Line Wide Chisel *	X × Y × Z (mm)	Α	140×40×6	140×40×6	150×50×7	180×60×9	150×50×7	180×60×9	200×70×10
Nail Point *	(° Angle)	В	30	30	30	30	30	30	30
CrossCut Asphalt Chisel *	$X \times Y \times Z$ (mm)	С	115×120×15	115×120×15	130×130 ×17	200×180×22	160×140×17	180×150×18	200×180×22
In-Line Chisel *	(° Angle)	D	30	30	30	30	30	30	30
Blunt Point *	(Ø in mm)	Е	47	55	65	72	77	85	95
Tamping Pad and Tool *	(mm)	F	200×200	200×200	200×200	200×200	200×200	n/a	n/a
CrossCut Chisel *	(mm)	G	47	55	65	72	77	85	95
Conical Point *	(° Angle)	Н	27	30	30	30	30	30	30
CrossCut Wide Chisel *	$X \times Y \times Z$ (mm)	I	140×40×6	140×40×6	150×50×7	180×60×9	150×50×7	180×60×9	200×70×10
In-Line Asphalt Chisel *	$X \times Y \times Z$ (mm)	J	115×120×15	115×120×15	130×130×17	200×180×22	160×140×17	180×150×18	200×180×22

Special application kit must be installed on the machine. *

78





Brushcat™ rotary cutter: Comes standard with a 7 cm offset blade and front wheels. Cutting height of 7.6 cm.

- Double-edge blade provides increased blade life by bidirectional cutter rotation (achieved by switching the hydraulic hoses at the drive motor)
- Direct hydraulic drive dampens impact loads and eliminates the need for shear pins or drive clutches.
- \bullet Front disks allow to better traverse uneven terrain while reducing operator fatigue.
 • Floation linkage allows the deck to float over ground

Features & Benefits

- contours, keeping it in contact with the surface for optimum performance.
- Floating frame allows oscillation +/- 10 degrees.
- Patented blade shutoff device stops blade rotation when rotary cutter is raised off the ground.

Description: Handle tough brush clearing and landscaping applications easily with the BrushcatTM rotary cutter. This attachment easily cuts through the toughest grass and brush while mulching small branches and saplings up to 7.6 cm in diameter. This tool is ideal for clearing lakefront property, construction sites, power line access roads, trails and ditches.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Cutting Width (mm)	Cutting Height (mm)	Flow Range (I/min)	Tip Speed	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Brushcat™ Rotary Cutter Standard Flow: RC44	7385981	1118	76.2	34.0 - 47.0	60.7 m/sec. @ 34 l/min 84.3 m/sec. @ 47 l/min	422	No	Standard	None
Brushcat™ Rotary Cutter Standard Flow: RC54	7424531	1372	76.2	45.0 - 68.0	59.5 m/sec. @ 45 l/min 89.3 m/sec. @ 68 l/min	473	No	Standard	None
Brushcat™ Rotary Cutter Standard Flow: RC72S	7218087	1829	76.2	57.0 - 98.0	50.4 m/sec. @ 57 l/min 87.4 m/sec. @ 98 l/min	680	No	Standard	None
Brushcat™ Rotary Cutter High Flow: RC72H	7233002	1829	76.2	91.0 - 121.0	50.4 m/sec. @ 91 I/min 84 m/sec. @ 121 I/min	680	No	High Flow	None
Brushcat™ Rotary Cutter High Flow: RC80H	7233092	2032	76.2	91.0 - 151.0	55.5 m/sec. @ 91 I/min 92.5 m/sec. @ 151 I/min	717	No	High Flow	None

^{*} S=Standard

			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	Н/0598	Н/92S	H/077S	S/H/98S
Brushcat™ Rotary Cutter Standard Flow: RC44	7385981	Х																			
Brushcat™ Rotary Cutter Standard Flow: RC54	7424531		Х								Х										
Brushcat™ Rotary Cutter Standard Flow: RC72S	7218087			Χ	Χ	Χ	Χ					Х	Х	Χ	Х	Χ	Х	Χ	Х	Х	Χ
Brushcat™ Rotary Cutter High Flow: RC72H	7233002			Х*	Х*	Х*	Х*	Х*								Х*	Х*	Х*	Х*	Х*	Х*
Brushcat™ Rotary Cutter High Flow: RC80H	7233092						Χ*	Χ*									Х*	Х*	Χ*	Х*	Х*

* High flow machines only

2025/2026 79 ** To be ordered through Bobcat Parts

BUCKET, COMBINATION





Features & Benefits

- Ideal for dozing, grappling, levelling, digging, loading and
- Built with heavy-duty cutting edges and protected cylinders for long life.

Combination Bucket: It is recommended to use the port relief valve 6684646 for S450/T450 and larger

Description: Dozing, grappling, levelling, digging, loading and dumping. This multi-purpose bucket does it all. Use it on demolition, construction, landscaping and municipal jobs. It's designed to provide optimum digging force and the interlocking serrated grapple edges hold objects securely.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Tooth Type	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	Jaw Opening (cm)	First Use Installation Time
Combination Bucket, 158 cm	7167310	158	303	W/o teeth	7	366	88	72	73	2.5 h
Combination Bucket, 173 cm	7167311	173	334	W/o teeth	7	386	88	72	73	2.5 h
Combination Bucket, 188 cm	7167312	188	379	W/o teeth	8	407	88	72	73	2.5 h
Combination Bucket, 203 cm	7167313	203	518	W/o teeth	8	487	88	72	73	2.5 h
Combination Bucket, 213 cm	7167314	213	546	W/o teeth	9	503	88	72	73	2.5 h

COMPATIBILITY CHARTS																					
			Co	mpact	Track	(Load	ers							skid-S	teer L	oader	s				
Description	Part Number	MT100	1450	T590/H	Н/991	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Combination Bucket, 158 cm	7167310		χ								χ	Х	χ	Х	χ		_				
Combination Bucket, 173 cm	7167311			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Х	Х	Х	Χ	Х
Combination Bucket, 188 cm	7167312			Χ	Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Combination Bucket, 203 cm	7167313					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
Combination Bucket, 213 cm	7167314					Χ	Χ	Χ												Χ	Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Hardware included	First Use Installation Time
Bolt-On Teeth Kit, 158 cm - 213 cm, (Set of 8) **	6737322	Yes	1 h
Hensley Forged Tooth Point (Qty. 1) **	7107317	Yes	-
Hensley Tiger Tooth Point (Qty. 1) **	7107320	Yes	-
Hensley Twin Tiger Tooth Point (Qty. 1) **	7107321	Yes	-
Bolt-On Cutting Edge, 158 cm **	6718005	No	1.5 h
Bolt-On Cutting Edge, 173 cm **	6718006	No	1.5 h
Bolt-On Cutting Edge, 188 cm **	6718007	No	1.5 h
Bolt-On Cutting Edge, 203 cm **	6718008	No	1.5 h
Bolt-On Cutting Edge, 213 cm **	6807069	No	1.5 h



BUCKET (CI), CONSTRUCTION / INDUSTRIAL



• Ideal for everything from tough digging to material handling easier bucket filling

Construction/Industrial Buckets (CI): Have predrilled holes to accept bolt-on cutting

 Good cutting edge visibility • Excellent bucket breakout force for better digging and

Features & Benefits

Description: The strongest of all Bobcat buckets. Ideal for everything from tough digging to material handling. Construction / industrial buckets offer good cutting edge visibility and excellent bucket breakout force for better digging and easier bucket filling. Heavy-duty construction / industrial buckets offer even more features required for severe-duty use.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, C/I, 127 cm	7160274.EA	127	270	70	6	160	81	54	None
Bucket, C/I, 142 cm	6737399.EA	142	310	70	6	194	81	54	None
Bucket, C/I, 157 cm	6731403.EA	157	360	70	7	211	81	54	None
Bucket, C/I, 173 cm	6731406.EA	173	400	70	7	213	81	54	None
Bucket, C/I, 188 cm	6731409.EA	188	440	70	8	242	81	54	None
Bucket, C/I, 203 cm	6731412.EA	203	470	70	8	256	81	54	None
Bucket, C/I, 173 cm, Heavy Duty	7124426.EA	173	532	70	7	291	97	61	None
Bucket, C/I, 188 cm, Heavy Duty	6732305.EA	188	580	70	8	309	97	61	None
Bucket, C/I, 203 cm, Heavy Duty	6726344.EA	203	630	70	8	332	97	61	None
Bucket, C/I, 213 cm, Heavy Duty	7125917.EA	213	670	70	8	344	97	61	None
Bucket, C/I, 224 cm, Heavy Duty	6726328.EA	224	700	70	9	351	97	61	None
Bucket, C/I, 208 cm, Severe Duty	7173162.EA	208	650	70	8	383	97	61	None
Bucket, C/I, 223 cm, Severe Duty	7173161.EA	224	700	70	9	403	97	61	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	lers						5	Skid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	H/0/41	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	Н/9/S	S770/H	S/H/98S
Bucket, C/I, 127 cm	7160274.EA									Х											
Bucket, C/I, 142 cm	6737399.EA		Χ								Χ										
Bucket, C/I, 157 cm	6731403.EA		Χ								Χ	Χ	Χ	Χ	Χ						
Bucket, C/I, 173 cm	6731406.EA		Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	
Bucket, C/I, 188 cm	6731409.EA			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, C/I, 203 cm	6731412.EA				Χ	Χ	Χ	Χ								Х	Х	Χ	Х	Χ	Χ
Bucket, C/I, Heavy Duty, 173 cm	7124426.EA			Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Bucket, C/I, Heavy Duty, 188 cm	6732305.EA			Χ	Χ	Χ	Χ									Χ	Χ	Χ	Х	Χ	Χ
Bucket, C/I, Heavy Duty, 203 cm	6726344.EA				Χ	Χ	Χ	Χ								Χ	Χ	Χ	Χ	Χ	Χ
Bucket, C/I, Heavy Duty, 213 cm	7125917.EA				Χ	Χ	Х	Х								Х		Χ	Χ	Χ	Χ
Bucket, C/I, Heavy Duty, 224 cm	6726328.EA						Χ	Χ												Χ	Χ
Bucket, C/I, Severe Duty, 208 cm	7173162.EA						Χ	Χ												Χ	Χ
Bucket, C/I, Severe Duty, 223 cm	7173161.EA						Χ	Χ												Χ	Χ

2025/2026 81 ** To be ordered through Bobcat Parts



BUCKET, DIRT



 \bullet Flat back assures a secure attaching area for the BobTach $^{\text{TM}}$ mounting system.

• Low heel makes cutting grade and backdragging easier.

Features & Benefits

Replaceable cutting edges.
 Side cutting edges give better performance, increase strength and extend bucket life.

Dirt Buckets: Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

Description: Ideal for everything from digging to material handling. Dirt buckets offer good cutting edge visibility and excellent bucket breakout force for better digging and easier bucket filling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Dirt, 91 cm	7117432.EA	91	130	70	6	76	63	51	None
Bucket, Dirt, 112 cm	7117433.EA	112	160	70	7	85	63	51	None
Bucket, Dirt, 127 cm	7117434.EA	127	190	70	7	92	63	51	None

COMPATIBILITY CHARTS																					
			Co	npact	Track	Load	ers						5	skid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Т590/Н	Т66/Н	Н/9/1	H/0//T	T86/H/S	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Bucket, Dirt, 91 cm	7117432.EA	Χ							Χ												
Bucket, Dirt, 112 cm	7117433.EA	Χ							Χ												
Bucket, Dirt, 127 cm	7117434.EA									Χ											

OPTIONS / ACCESSORIES			
Description	Dirt Bucket 91 cm	Dirt Bucket 112 cm	Dirt Bucket 127 cm
	7117432.EA	7117433.EA	7117434.EA
Bolt-On Teeth Kit (Set of 7) **	6728247	6728247	6728247
Bolt-On Cutting Edge **	6729042	6729043	7104502
Bucket Bite Tooth Bar **	-	7125548	7125549
Side Utility Plate Kit **	7125270	7125270	7125270

OPTIONS / ACCESSORIES								
Description	C/I Bucket 127 cm	C/I Bucket 142 cm	C/I Bucket 157 cm	C/I Bucket 173 cm	C/I Bucket 188 cm	C/I Bucket 203 cm		
	7160274.EA	6737399.EA	6731403.EA	6731406.EA	6731409.EA	6731412.EA		Utility Grapple
Utility Grapple, 140 cm, C/I	-	-	7176977	7176977	7176977	7176977		Bolt-On Teeth
Bolt-On Teeth Kit (Set of 8) **	6737322	6737322	6737322	6737322	6737322	6737322	7	Boil-Oil Teetii
Bolt-On Cutting Edge **	7160267	7102450	6718005	6718006	6718007	6718008		Bolt-On Cutting Edge
Spill Guard Kit Includes two 40 cm Spill Guards and Hardware. Protects tilt cylinders and Bob-Tach™ pivot point area from debris. **	6725979	6725979	6725979	6725979	6725979	6725979		Bucket Spill Guard
Bucket Spill Guard, Standard Includes a see through 112 cm Spill Guard and Hardware. Protects the operator, cab, tilt cylinders and Bob-Tach™ pivot area from debris.	-	-	7196474 **	7196474 **	7196474 **	7196474 **	FFER	Bucket Bite Tooth Bar
Bucket Bite Tooth Bar **	-	7125550	6905314	6905315	6905316	6905317		
Bolt-On Side Guard Kit Hardware included. Changes C/I Bucket Profile to Utility Profile. **	-	6725980	6725980	6725980	6725980	6725980		Bolt-On Side Guard

OPTIONS / ACCESSORIES								
Description	C/I Bucket 173 cm Heady Duty 7124426.EA	C/I Bucket 188 cm Heavy Duty 6732305.EA	C/I Bucket 203 cm Heavy Duty 6726344.EA	C/I Bucket 213 cm Heavy Duty 7125917.EA	C/I Bucket 224 cm Heavy Duty 6726328.EA	C/I Bucket 208 cm Severe Duty 7173162.EA	C/I Bucket 223 cm Severe Duty 7173161.EA	Bolt-On Teeth
Bolt-On Teeth Kit **	7107336 (set of 8)	7173896 (set of 8)	7173895 (set of 9)					
Bolt-On Cutting Edge **	6718006	6718007	6718008	7125924	6727317	7172352	6727317	
Bolt **	-	-	-	-	-	95G1040 (×16)	95G1040 (×18)	Bolt-On Cutting Edge
Nut **	-	-	-	-	-	57D10 (×16)	57D10 (×18)	Bucket Spill Guard
Bucket Spill Guard, Standard Includes a see through 112 cm Spill Guard and Hardware. Protects the operator, cab, tilt cylinders and Bob-Tach™ pivot area from debris.	7196474 **	7196474 **	7196474 **	7196474 **	7196474 **	7196475 **	7196475 **	Bolt-On Side Guard
Bolt-On Side Guard Kit Hardware included. Changes C/I Bucket Profile to Utility Profile. **	6728353	6728353	6728353	6728353	6728353	-	-	


BUCKET, FERTILISER & GRAIN





Features & Benefits

- Large capacities.
- More roll-back range. The greater roll-back allows granular materials to be easily held in the bucket by minimising spillage over the front edge.



Description: Fertiliser buckets have large capacities and more roll-back range. The greater roll-back allows granular materials to be easily held in the bucket by minimising spillage over the front edge. Applications include fertiliser and grain handling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Fertiliser & Grain, 152 cm	6558681.EA	152	470	60	0	162	101	57	None
Bucket, Fertiliser & Grain, 168 cm	6706479.EA	168	860	60	0	227	101	57	None
Bucket, Fertiliser & Grain, 183 cm	6706483.EA	183	930	60	0	230	101	57	None

COMPATIBILITY CHARTS																					
		Compact Track Loaders Skid-Steer Loaders																			
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	N/065S	Н/99S	Н/0898	S650/H	Н/92S	H/077S	S/H/98S
Bucket, Fertiliser & Grain, 152 cm	6558681.EA		Х								Х	Х	Х	Х	Х						
Bucket, Fertiliser & Grain, 168 cm	6706479.EA			Χ								Х	Χ	Χ	Χ	Χ	Х	Χ	Х		
Bucket, Fertiliser & Grain, 183 cm	6706483.EA			Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

** To be ordered through Bobcat Parts

OPTIONS / ACCESSORIES			
Description	Fertiliser & Grain Bucket 152 cm	Fertiliser & Grain Bucket 168 cm	Fertiliser & Grain Bucket 183 cm
	6558681.EA	6706479.EA	6706483.EA
Bolt-On Cutting Edge **	-	-	6713713
Spill Guard Kit ■ Includes two 40 cm Spill Guards and Hardware. Protects tilt cylinders and Bob-Tach™ pivot point area from debris. **	6725979	6725979	6725979







BUCKET (GP), GENERAL PURPOSE



Bob-Tach™ mounting system Replaceable cutting edges

General Purpose Buckets (GP): Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

• Round back design enhances bucket loading and cleanout

Features & Benefits

- Flat back assures a secure attaching area for the
- · Low heel makes cutting grade and backdragging easier
- Side cutting edges give better performance, increase strength and extend bucket life

Description: General purpose buckets have a longer bottom than the dirt style. They offer excellent cutting edge visibility and good breakout force. General purpose buckets are ideal for light duty and medium duty grading and levelling applications as well as material handling.


TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, General Purpose, 91 cm	7114488.EA	91	170	70	6	84	76	51	None
Bucket, General Purpose, 112 cm	7114581.EA	112	210	70	7	94	76	51	None
Bucket, General Purpose, 127 cm, S70	7114583.EA	127	240	70	7	101	76	51	None
Bucket, General Purpose, 127 cm, S100	7114582.EA	127	240	70	7	101	76	51	None
Bucket, General Purpose, 142 cm	7114584.EA	142	270	70	6	108	76	51	None
Bucket, General Purpose, 158 cm	7114585.EA	158	300	70	7	117	76	51	None
Bucket, General Purpose, 173 cm	7114586.EA	173	330	70	7	124	76	51	None
Bucket, General Purpose, 188 cm	7114587.EA	188	360	70	8	132	76	51	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						5	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/92S	H/077S	S/H/98S
Bucket, General Purpose, 91 cm	7114488.EA	Χ							Χ												
Bucket, General Purpose, 112 cm	7114581.EA	Χ							Χ												
Bucket, General Purpose, 127 cm, S70	7114583.EA	Χ							Χ												
Bucket, General Purpose, 127 cm, S100	7114582.EA									Χ											
Bucket, General Purpose, 142 cm	7114584.EA									Χ	Χ										
Bucket, General Purpose, 158 cm	7114585.EA										Χ	Χ	Χ	Χ							
Bucket, General Purpose, 173 cm	7114586.EA										Χ	Χ	Χ	Χ							
Bucket, General Purpose, 188 cm	7114587.EA										Χ	Χ	Χ	Χ							

OPTIONS / ACCESSORIES								
Description	GP Bucket 91 cm 7114488.EA	GP Bucket 112 cm 7114581.EA	GP Bucket 127 cm (S70) 7114583.EA	GP Bucket 127 cm (S100) 7114582.EA	GP Bucket 142 cm 7114584.EA	GP Bucket 158 cm 7114585.EA	GP Bucket 173 cm 7114586.EA	GP Bucket 188 cm 7114587.EA
Utility Grapple, 81 cm	7125370	7125370	7125370	7125370	7125370	-	-	-
Utility Grapple, 140 cm, GP	-	-	-	-	-	7176783.EA	7176783.EA	7176783.EA
Bolt-On Teeth Kit (Set of 7) **	6728247	6728247	6728247	6728247	6728247	6728247	6728247	6728247
Bolt-On Cutting Edge **	6729042	6729043	7104502	7104502	7125269	6732406	7104508	7104510
Bucket Bite Tooth Bar **	-	7125548	7125549	7125549	7125550	6905314	6905315	6905316
Side Utility Plate Kit (set of 2) **	7104358	7104358	7104358	7104358	7104358	7104358	7104358	7104358

** To be ordered through Bobcat Parts

BUCKET, LOAD & CARRY

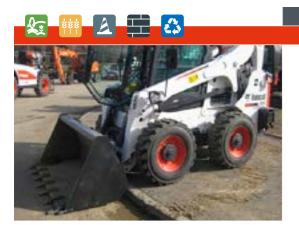

Features & Benefits

• With its large load capacity our Load and Carry bucket can move material quick and effectively from one side of the jobsite to another.

- Offers the volumes 0,85 m³ but more endurance than a Light Material bucket.
- Equipped with a cutting edge and side cutting wedges.
 Option of teeth and teeth protection (for road

Load and Carry Buckets: Have predrilled holes to accept bolt-on cutting edge or

Description: Ideal solution for carrying light construction materials, hops or seed, engineered for easy filling and reduced spillage.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (L)	Bucket back angle (°)	Accepts max. n° of teeth	Weight (Kg)	Length (cm)	Height (cm)	First use installation time
Bucket, Load and Carry, 194 cm	7268350	194	850	65	7	333	105	80	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers							Skid S	teer L	oader	S				
Description	Part Number	MT100	T450	Н290/Н	Н/991	H/9/1	H/0/71	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S650/H	Н/998	H/9/S	H/077S	S/H/98S
Bucket, Load and Carry, 194 cm	7268350							Х												Х	Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Hardware included	First Use Installation Time
Bolt-on Teeth kit (Set of 7)	7268346	Yes	1 h
Protection Plate for teeth *	7268349	Yes	None

^{*} Mandatory for road homologation



BUCKET (LP), LOW PROFILE





Low Profile Buckets: Have predrilled holes to accept bolt-on cutting edge or bolt-on

• Ideal for everything from tough digging to material handling.

Features & Benefits

- Good cutting edge visibility.
 Excellent bucket breakout force for better digging and easier bucket filling.

Description: These buckets have a longer bottom than the construction/industrial style. They offer excellent cutting edge visibility and good bucket breakout force. Low Profile buckets are ideal for grading and levelling applications as well as material handling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Low Profile, 127 cm	7161031.EA	127	310	70	6	184	90	54	None
Bucket, Low Profile, 142 cm	7101903.EA	142	370	70	6	194	90	54	None
Bucket, Low Profile, 157 cm	6731415.EA	157	410	70	7	219	90	54	None
Bucket, Low Profile, 173 cm	6731418.EA	173	450	70	7	234	90	54	None
Bucket, Low Profile, 188 cm	6731421.EA	188	500	70	8	242	90	54	None
Bucket, Low Profile, 203 cm	6731424.EA	203	540	70	8	266	90	54	None


COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	H/065S	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Bucket, Low Profile, 127 cm	7161031.EA									Χ											
Bucket, Low Profile, 142 cm	7101903.EA		Χ								Χ										
Bucket, Low Profile, 157 cm	6731415.EA		Χ								Χ	Χ	Χ	Χ	Χ						
Bucket, Low Profile, 173 cm	6731418.EA		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	
Bucket, Low Profile, 188 cm	6731421.EA			Χ	Χ	Χ		Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, Low Profile, 203 cm	6731424.EA					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES						
Description	Low Profile Bucket 127 cm	Low Profile Bucket 142 cm	Low Profile Bucket 157 cm	Low Profile Bucket 173 cm	Low Profile Bucket 188 cm	Low Profile Bucket 203 cm
	7161031.EA	7101903.EA	6731415.EA	6731418.EA	6731421.EA	6731424.EA
Utility Grapple, 140 cm, C/I	-	-	7176977	7176977	7176977	7176977
Bolt-On Teeth Kit (set of 8) **	6737322	6737322	6737322	6737322	6737322	6737322
Bolt-On Cutting Edge **	7160267	7102450	6718005	6718006	6718007	6718008
Spill Guard Kit ■ Includes two 40 cm Spill Guards and Hardware. Protects tilt cylinders and Bob-Tach™ pivot point area from debris. **	6725979	6725979	6725979	6725979	6725979	6725979
Bucket Spill Guard, Standard • Includes a see through 112 cm Spill Guard and Hardware. Protects the operator, cab, tilt cylinders and Bob-Tach™ pivot area from debris.			7196474 **	7196474 **	7196474 **	7196474 **
Bolt-On Side Guard Kit • Hardware included. Changes Low Profile Bucket to Utility Profile. **			6725981	6725981	6725981	6725981

2025/2026 87 ** To be ordered through Bobcat Parts

BUCKET, SKELETON



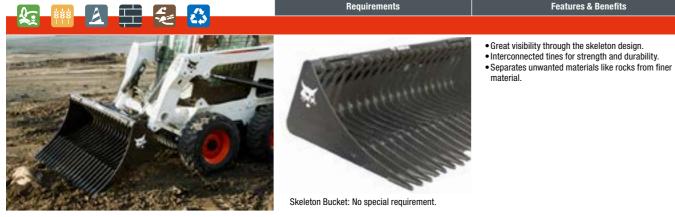

Description: Bobcat skeleton buckets are excellent for separating unwanted objects, such as rocks and other debris, from work areas while leaving finer material behind that can be cultivated or landscaped.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Number of Tines	Tine Spacing (cm)	Bucket Back Angle (°)	Tine Thickness (cm)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Skeleton Bucket, 174 cm	7185943	174	19	7,6	70	1	281	120	52	None
Skeleton Bucket, 192 cm	7185945	192	21	7,6	70	1	296	120	52	None
Skeleton Bucket, 209 cm	7185947	209	23	7,6	70	1	318	120	52	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	skid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/077Т	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	Н/0658	Н/99S	Н/0Е9S	S650/H	Н/9/S	Н/022S	S/H/98S
Skeleton Bucket, 174 cm	7185943		Х	Х	Х	Х	Х				Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	
Skeleton Bucket, 192 cm	7185945				Χ	Х	Χ	Χ									Χ	Х	Х	Χ	Х
Skeleton Bucket, 209 cm	7185947					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ



BUCKET, SNOW & LIGHT MATERIAL



- Large capacity for loading and handling various light
- materials such as snow and mulch.
- · High backs to help with pushing snow.
- Straight sides to penetrate snow and mulch piles.

Description: Because snow is relatively light compared to soil, gravel or other construction materials, the capacity of the snow bucket is much greater than those usually used in construction. The back of the snow bucket is also higher, which lets you push more snow without having it flow over the top. Spill guards are available, they are meant to protect the operator, door, tilt cylinders and the Bob-Tach™ pivot area from debris that spills over the back of the bucket.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Snow & Light Material, 168 cm	7184103.EA	168	690	70	0	262	107	68	None
Bucket, Snow & Light Material, 188 cm	7184105.EA	188	760	70	0	281	107	68	None
Bucket, Snow & Light Material, 203 cm	7184110.EA	203	830	70	0	290	107	68	None
Bucket, Snow & Light Material, 224 cm	7184098.EA	224	920	70	0	309	107	68	None
Bucket, Snow & Light Material, 254 cm	6727787.EA	254	1530	70	0	398	107	68	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	(Load	ers						5	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	T770/H	T86/H/S	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	N/077S	S/H/98S
Bucket, Snow & Light Material, 168 cm	7184103.EA		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	Х	
Bucket, Snow & Light Material, 188 cm	7184105.EA		Χ	Χ	Χ	Χ		Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, Snow & Light Material, 203 cm	7184110.EA			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, Snow & Light Material, 224 cm	7184098.EA			Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, Snow & Light Material, 254 cm	6727787.EA						Χ	Χ												Χ	Х


OPTIONS / ACCESSORIES						
Description	Snow & Light Material 168 cm 7184103.EA	Snow & Light Material 188 cm 7184105.EA	Snow & Light Material 203 cm 7184110.EA	Snow & Light Material 224 cm 7184098.EA	Snow & Light Material 254 cm 6727787.EA	Bolt-On Cutting Edge
Bolt-On Cutting Edge **	-	6718007	6718008	6727317	6715464	
Bucket Spill Guard, Standard • Includes a see through 112 cm Spill Guard and Hardware. Protects the operator, cab, tilt cylinders and Bob-Tach™ pivot area from debris.	-	7196474 **	7196474 **	7196474 **	7196474 **	Bucket Spill Guar
Bolt-On Side Guard Kit • Hardware included. Changes Snow Bucket Profile to Utility Profile. **	-	6727778	6727778	6727778	6729325	Bolt-On Side Guard



OUR LIGHT MATERIAL BUCKETS ARE APPROVED ON LOADERS WITH THE MAXIMUM MATERIAL DENSITY OF 800 KG/M³

2025/2026 89 ** To be ordered through Bobcat Parts

BUCKET, UTILITY

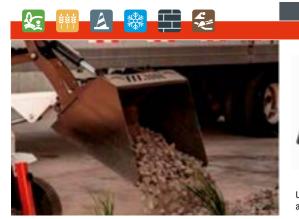

equirements Features & Benefits

- Round back design enhances bucket loading and cleanout
 Flat back assures a secure attaching area for the Bob-
- Tach™ mounting system
- Low heel makes cutting grade and backdragging easier
 Replaceable cutting edges
- Seethrough back part of the bucket for improved visibility to the cutting edge

Utility buckets: Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

Description: Utility buckets have a longer bottom than the dirt style. They offer excellent cutting edge visbility and good breakout force. Utility buckets are ideal for light duty and medium duty grading and levelling applications as well as material handling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Utility, 112 cm	7387672	112	280	70	5	105	80.5	51.9	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	c Load	lers						5	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0771	T86/H/S	870	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/92S	H/077S	S/H/98S
Bucket, Utility, 112 cm	7387672	Х																			



CONCRETE MIXER



Description: Turn your Bobcat loader into an efficient concrete mixer with this rugged, cost-effective attachment. The Bobcat concrete mixer attachment lets you mix, transport and dump concrete much quicker than a traditional stand-alone mixer and wheelbarrow. The attachments compact size makes it perfect for sidewalks, driveways, finish work, and footings and floors of small buildings. It's great for working in hard-to-reach or limited-access areas.

TECHNICAL SPECIFICATIONS							
Description	Part Number	Bucket Capacity (I)	Rotation	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Concrete Mixer	7186695	200	Bidirectional	195	Yes	Standard	2.5 h

COV	MPATIBILITY CHARTS																					
				Cor	npact	Track	c Load	ers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	H/991	H/9/1	Н/0//1	Z/H/981	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
0	Concrete Mixer	7186695		Х	Х	Х	Χ	Х	Х			Х	Х	Х	Х	Χ	Х	Х	Х	Х	Х	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Flo	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

2025/2026 91
** To be ordered through Bobcat Parts

B4501805-EN (01-25)

CONCRETE PUMP





Features & Benefits

Attachment • All pump components are guarded and easily accessible for Concrete Pump **Control Kit** adjustment and service.

Control panel swivels for convenient operation from either side 2

of the pump.

• Protective guard panel strains larger objects from concrete mix.

 Attach-plates on both sides of the pump make it easy to position in tight spots for either left- or right-hand delivery. Protects underground utilities from large concrete trucks.
 Keeps concrete trucks off driveways and sidewalks; prevents

Hose can be routed through small openings, under decks,

through bushes, across rivers, around trees and buildings, and

Description: This powerful attachment puts concrete right where you want it and is built to last. Pumps concrete up to 75 m horizontally and two stories vertically. The hose is easily routed through small openings, under decks, through bushes and around other common obstructions. It reduces damage to turf and underground utilities caused by using large concrete trucks.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Length (cm)	Hopper Capacity (I)	Flow (I/min)	Pump Rate (m³/h)	Max. Pumping Height (m)	Max. Pumping Distance (m)	Weight (kg)	Control Kit Re- quired	Working Flow
Concrete Pump	7108693	261	121	280	56 - 151	23	15	75	998	Yes	Standard / High Flow

C	OMPATIBILITY CHARTS																					
				Con	npact	Track	Load	lers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	H/991	Н/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	N/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
(Concrete Pump	7108693			Х	Χ	Х	Х	Χ						Х	Х	Х	Х	Х	Χ	Х	Х
	Note: 7-Pin Attachment Control Kit is installed as stand	dard on High Flo	ow (H)	mach	ines.																	
(2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
ľ	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
Delivery System Kit (Basic Setup, approx. 29 Meters) includes: 3 × 3 m steel pipes, 3 × 6 m hose, 1 × Reducer. 1 × 90 degrees elbow, 1 × 1,8 m hose and all needed couplers. Hoses and steel pipes diameter = 75 mm.	6906079	290
Remote Control Kit The hand held transmitter runs all functions of the Concrete pump within a range of 60 to 120 m from the pump.	6906813	4









Loosening hard-packed soil

Its unique design and shape are ideal for:

Features & Benefits

. Digging in forward and reverse

Making trenches

Transplanting trees and shrubs

Carrying plants balled and small trees

Removing roots and shrubs

Removing rocks and stumps

• Width of 65 cm for optimal performance

• Digging depth of 121 cm for optimum reach Maintenance free

Digger: No special requirement.

Description: The digger is ideal for nurseries and landscaping applications. Use this multiple-use attachment to dig, trench, remove rocks and stumps, transplant trees and shrubs, carry and plant balled and burlapped trees, as well as, loosen hard-packed soil.


TECHNICAL SPECIFICATIONS							
Description	Part Number	Digging Width (cm)	Digging Depth (cm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Digger, 65 cm	6719756	65	121	132	No	Standard	None

COMPATIBILITY CHARTS																					
			Coi	npact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	Н/991	H/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	S76/H	S770/H	S/H/98S
Digger, 65 cm	6719756		Х	Х	Х						Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х

2025/2026 93 ** To be ordered through Bobcat Parts

DOZER BLADE



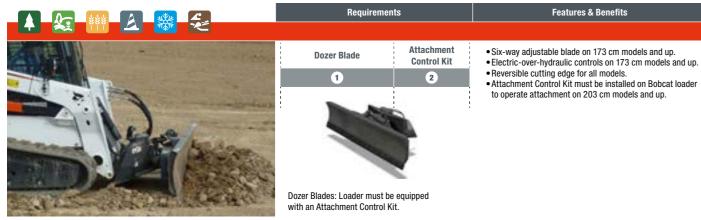

Description: Turn your loader into a mini crawler with the dozer blade. Expand the versatility of your compact tool carrier with the 6-way adjustable blade with electric-over-hydraulic controls and the reversible 3-piece cutting edge. The 6-way dozer blade can be angled plus or minus 30° degrees and oscillates plus or minus 10° for great flexibility under varying dozer conditions. Use this attachment to level, pile and grade loose dirt, gravel and sand; to backfill and shape landscape areas. This heavy duty tool is also ideal for construction applications.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Angle ± (°)	Cylin- ders	Oscilla- tion ± (°)	Skid Shoes	Reversible Cutting Edge (mm)	Working Width (Fully Angled) (mm)	Weight (kg)	Control Kit Re- quired	Working Flow
Dozer Blade, 137 cm	7196165	137	30	1	0	Adjustable	9.6 × 101.6	1189	140	No	Standard
Dozer Blade, 203 cm	6905884	203	30	3	8	Adjustable	12.7 × 152	1760	430	Yes	Standard
Dozer Blade, 229 cm	6905811	229	30	3	8	Adjustable	12.7 × 152	1982	447	Yes	Standard
Dozer Blade, 244 cm	7105781	244	30	3	10	Adjustable	16 × 152	2121	716	Yes	Standard

COI	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	H/991	H/9/1	T770/H	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Dozer Blade, 137 cm	7196165	Х							Х												
	Dozer Blade, 203 cm	6905884		Χ	Χ	Χ	Χ					Х	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	Χ	Χ
۳	Dozer Blade, 229 cm	6905811			Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Dozer Blade, 244 cm	7105781					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	ndard on High Flo	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

Angles 30° L/R Oscillates 8°/10° L/R Tilt Frw/Ryr






** To be ordered through Bobcat Parts





DUMPING HOPPER

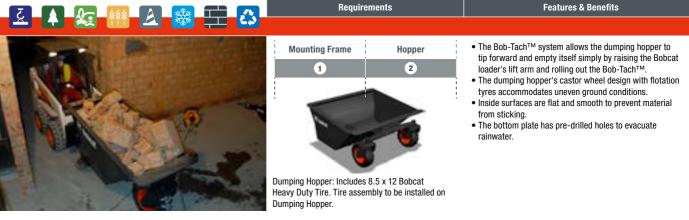

Description: Park it, load it and dump it. This attachment mounts as easily as a bucket on your loader, and can go wherever your loader goes. Empties fast and easy, just raise the loader arms and dump. Flat, smooth interior surfaces prevent materials from sticking.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Length (mm)	Width (mm)	Height (mm)	Capacity Heaped (m³)	Capacity Struck (m³)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Dumping Hopper, 10	6727275	2108	914	1016	0.84	0.73	304	No	Standard	0.5 h
Dumping Hopper, 25	6717597	2108	2133	1016	2.45	1.93	569	No	Standard	0.5 h

COMPATIBILITY CHARTS																					
			Con	npact	Track	Load	lers						S	kid-S	teer L	.oadei	s				
Description	Part Number	MT100	T450	T590/H	Т66/Н	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/9/S	N/077S	S/H/98S
1 Mounting Frame Bracket for Dumping Hopper 10 **	6729483		Χ	Χ						Χ	Χ		Χ	Χ	Χ	Χ					
Dumping Hopper, 10	6727275		Χ	Χ					Χ	Χ	Χ		Χ	Χ	Χ	Χ					
Dumping Hopper, 25	6717597		Χ	Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

** To be ordered through Bobcat Parts

B4501805-EN (01-25)

FLAIL CUTTER





Features & Benefits

• Variable speed displacement motor allows the flail cutter to be "tuned in" to your machine, depending on its hydraulic capacity. By varying the motor displacement to accept auxiliary hydraulic flows ranging from 64 to 151 l/min, the flail cutter can be operated on many different carriers.

• Floating linkage is standard on the flail cutter. This, along with the attachment's

compact deck length, lets the unit follow the contour of the land regardless of the pitch or attitude of the carrier, permitting the cutter up to ten degrees of Safety compliance The flail cutter complies with the SAE J1001 standard for

industrial flail mowers. It is standard-equipped with an automatic shut-off device which allows approximately ten inches of vertical travel in the Bob-

Tach™; mounting system before the flail cutter shuts down.
• Full width tapered rear roller provides greater turning ability during operation.

Adjustable rear hatch allows operators to vary the size of discharged material, ranging from small, for mulching applications to coarse for high performance.

Flail Cutter: No special requirement.

Description: The flail cutter is ideal for cutting overgrowth on construction sites as well as alongside roads and sidewalks. It adjusts to follow ground contour.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Cutting Width (mm)	Flow (I/min)	Max. Drum Speed (rpm)	Shut Off Float Height (mm)	Weight (kg)	Number of Hammers	Control Kit Required	Working Flow	First Use Installation Time
Flail Cutter, FC155	7115498	1550	64 - 151	2200	254	580	15	No	Standard / High Flow	None
Flail Cutter, FC175	7108385	1750	64 - 151	2200	254	696	18	No	Standard / High Flow	None
Flail Cutter, FC200	7101894	2000	64 - 151	2200	254	746	21	No	Standard / High Flow	None

COMPATIBILITY CHARTS																					
			Coi	npact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	H/0/LL	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
Flail Cutter, FC155	7115498		Χ	Х	Х						Χ	Χ	Х	Х	Х	Χ					
Flail Cutter, FC175	7108385			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		
Flail Cutter, FC200	7101894			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ



FORESTRY CUTTER



• Provides you a complete tree and brush management package. Forestry Kit Cut higher trees and limbs down to size, grind trees from top to bottom, produce mulch.

Spiral tooth pattern allows one tooth to engage at a time for smoother operation and less horsepower demand.
 Double-tipped carbide teeth efficiently rip through hard and soft woods, provide long life.

Features & Benefits

Can operate below grade to process mulch into the soil.
 Pressure gauge is visible from the seat to help operator run the

attachment at peak efficiency.

The standard front gate can reduce front discharge of material

and can promote longer processing into finer mulch.

• The Bobcat Forestry Applications Kit protects

the operator and the machine.

Description: Take trees and underbrush from unsightly overgrowth to mulch in minutes with the Bobcat forestry cutter. The forestry cutter leaves a carpet of mulch behind when clearing trees and brush for pre/post disaster mitigation, utility line and road right-of-way maintenance, site preparation, orchard and vineyard maintenance. Use it to cut firebreaks, clean lots and maintain property with ease.

Forestry Cutter

2

TECHNICAL SPECIFICATIONS										
Description	Part Number	Cutting Width (mm)	Number of Teeth	Tree Diameter, Continuous Use (mm)	Tree Diameter, Intermit- tent Use (mm)	Tree Diameter, Occasional Removal (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Forestry Cutter, FRC150VT	7493042	1500	30	100 - 120	180 - 220¹	250 - 300¹	865	Yes	High/Super Flow	None
Forestry Cutter, FRC200XT	7493043	2000	36	100 - 120	180 - 220	250 - 300	1185	Yes	High/Super Flow	None


1 Values may differ for carrier with flow below 116 I/min

COMPATIBILITY CHARTS																					
			Cor	npact	Track	Load	ers						s	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	Н/9/S	S770/H	S/H/98S
Forestry Cutter, FRC150VT	7493042			χ*	Х*	Х	Χ*	Х*									Х*	X*	Х	Х*	Χ*
Forestry Cutter, FRC200XT	7493043						Χ*	Χ												Χ*	Х

*Motor adjustment needed by Bobcat Technician

				C		ct Tra ders	ck				Skid	-Stee	r Loa	ders	_		
		Description	Part Number	MT100	T450	Т590/Н	Н/0/11	S70	S100	S450	S510/H	S530/H	H/055S	Н/0658	S630/H	S650/H	H/077S
Forestry Application Kit Kit weight guisher 2a 2b 2c 2d	2a	Forestry Application Kit for 500-600 series E2 & 700 series Non E2 machines: • Forestry Door (19 mm Laminated Polycarbonate) • Front and Rear Light Guard • Hydraulic Quick Coupler Guard • Level II FOPS • Muffler Guard • Top and Rear Windows • Polycarbonate Side Windows	7455788			х	х								х	Х	х
Forestry Cutter: Applications, Engine Compartment and Fire Extinguisher Kits must be equipped to operate the Forestry		Forestry Application Kit for 700 series E2 machines: • Forestry Door (19 mm Laminated Polycarbonate) • Front and Rear Light Guards • Hydraulic Quick Coupler Guard • Level II FOPS • Top and Rear Windows • Polycarbonate Side Windows	7455789**				Х										Х
Cutter and provide operator and machine protection. Counterweight to be ordered if		Engine Compartment Seal Kit:	7233421**			Χ											
required for operation.	2b	Cab/Mainframe Seal Tailgate Seal	7206200**												Χ		
	2.0	Mainframe Slot Cover	7209981**													Χ	
¹ a counterweight kit is required		Lift Cylinder Boots	7309976**				X										Х
Fire extinguisher mandatory - to be ordered	2c	Kit Weight 200 lbs	7129250**			X ¹									Χ		
through parts **		Kit Weight 300 lbs	7407736**				X1										
	2d	Fire Extinguisher Kit	7413592**	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

COMPATIBILITY CHARTS									
				Compa	ct Track L	oaders	Skid-	-Steer Loa	ders
		Description	Part Number	Т66/Н	Н/9/1	S/H/981	S66/H	876/н	S/H/98S
Forestry Forestry Coupler Cutter Kit Guard Kit Frame Kits weight guisher 1 2a 2b 2c 2d 2e	2a	Forestry Kit, Standard Cab Forestry Door FOPS TOP Rear and Side Window Headlight and Tail Light Guard Tailgate Guard Exhaust Debris Guards	7485086	X	Х	Х	Х	Х	Х
	2a	Forestry Kit, Clear Side Cab Forestry Door FOPS TOP Rear and Sliding Window Headlight and Tail Light Guard Tailgate Guard Exhaust Debris Guards	7485087	Х	х	х	х	х	х
	2b	Kit 3-Coupler Guard	7360697 **	Χ	Χ		Χ	Χ	Χ
		Kit 5-Coupler Guard	7422814 **			Х			X
		Seal Frame Kit (M Frame)	7481754 **	Х			Х		
Forestry Cuttor. The forestry outtor must be		Seal Frame Kit (M Frame)	7482134 **				Х		
Forestry Cutter: The forestry cutter must be equipped with a forestry kit, coupler guard,	2c	Seal Frame Kit (L Frame)	7482434 **			Χ			X
seal frame kit, counterweight (if required), and a fire extinguisher.		Seal Frame Kit (XL Frame)	7484999 **		X			X	
Fire extinguisher mandatory - to be ordered through parts **		Seal Frame Kit (XL Frame)	7485062 **		v			Х	
	2d)	Kit Weight 400 lbs	7419037 **		X				
	2e	Fire Extinguisher Kit	7413592 **	Х	Χ	Χ	Χ	Χ	Χ

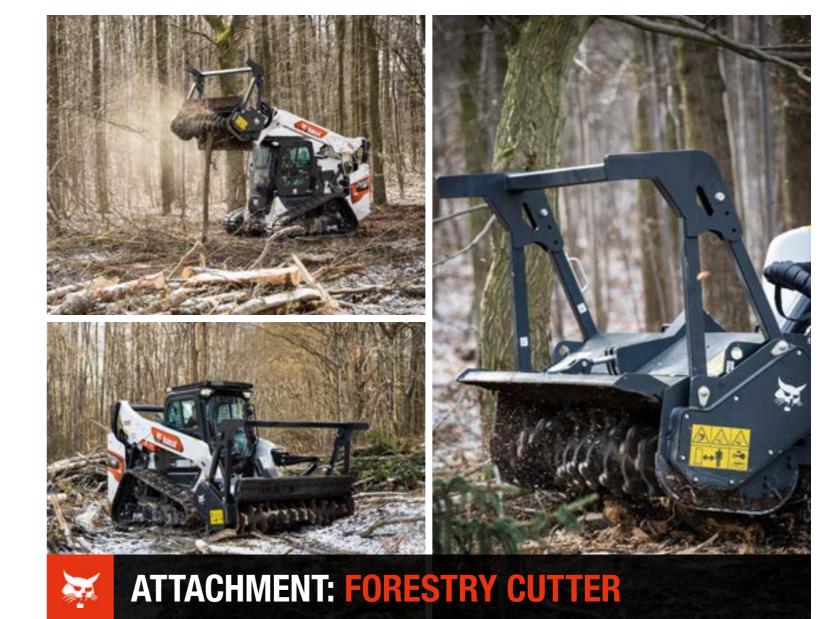

WHY CHOOSE A BOBCAT FORESTRY CUTTER?

- Mulch a tree in minutes thanks to the 150 or 200 cm wide drums, as well as the variable torques for great productivity.
- ▶ These forestry cutters provide a high-level of precision. Surgically cut the selected tree only or create a path with great agility, and without damaging the surrounding vegetation.
- For increased safety, there is a special application kit that protects the operator and the machine.

MORE INFO ON WWW.BOBCAT.COM

2025/2026 99
** To be ordered through Bobcat Parts







ATTACHMENT: FORESTRY CUTTER

MULCH TREES IN MINUTES WITH THE FORESTRY CUTTER

- ▶ Perfect for any cutting job in a fragile environment thanks to the attachment's compact size and the machine's unmatched maneuverability
- ▶ All in one tool: Allows the operator to perform the job from start to finish mulching trees or dead wood into medium sized chips leaving the jobsite clean after the work is done
- ▶ The tungsten-carbide teeth guarantee a long product life with low operating cost
- ldeal for land clearing, fire breaks, land preparation and park management

MORE INFO ON WWW.BOBCAT.COM





Grader Attachment Control Kit

1 2

Grader: Loader must be equipped with an Attachment Control Kit.

- Blade has a reversible cutting edge that is also easily
- replaceable. • Bob-Tach™ mounted.
- Blade manually adjusts sideways up to 30 cm either way.

Features & Benefits

- Optional laser control package for precise grade control in flatwork contracting.
- Attachment control kit must be installed on Bobcat loader to operate attachment.
- 3 cylinders for precise postioning of the blade.
- · HD graders are retrofittable for 3D grading application

Description: Turn your Bobcat loader into a high-performance grading machine. The six-way hydraulically-controlled blade is easy to operate with switches located on steering levers. Optional laser control system offers more precise control and saves concrete, time and labor.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Blade Width Fully Angled (cm)	Blade Angle (Right or Left) (°)	Sideshift	Blade Sideshift Left/Right	Cylin- der	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Grader, 213 cm	6906480	213	193	25	Manual	305	3	624	Yes	Standard	None
Grader, 244 cm, HD	7160005	244	212	30	Hydraulic	330	5	1264	Yes	Standard	None
Grader, 274 cm, HD	7182060	274	238	30	Hydraulic	330	5	1298	Yes	Standard	None

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	ers						s	kid-S	teer L	oader	s				
ı	Description	Part Number	MT100	T450	T590/H	H/991	H/9/1	Н/0//1	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Grader, 213 cm	6906480		Х	Х	Х						Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
1	Grader, 244 cm, HD	7160005					Χ	Χ	Х												Χ	Χ
	Grader, 274 cm, HD	7182060						Χ	Χ												Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Fl	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Х													Χ







PRECISE TOOLS FOR THE BEST JOB RESULTS

■ GRADER 213 CM WITH LASER EQUIPMENT



- Laser Receiver LR410: PN 7436330 (Must order 2 Receivers.)
 Approved on Graders with S/N 6480-01631 & above
- 2 Laser Transmitter: Dual Slope: GL722 PN 6680073
- 3 Tripod: PN 6688806
- Laser Mounting Kit: PN 7436128 For 84"/213 cm Graders with S/N 6480-01631 & above. Includes poles and harnesses.
- Loader must be equipped with an Attachment Control Kit.
 In case of a non-HF machine, order this kit from Parts.
 7-pin Attachment Control Kit for G > K-series loaders: PN 6733142
 7-pin Attachment Control Kit for M-series loaders: PN 7128426
- 6 84" / 213 cm Grader PN 6906480

► GRADER 244 CM AND 274 CM WITH LASER SYSTEM



- 1 Laser Receivers LR410: PN 7436330 (Must order 2 Receivers.)
- 2 Laser Mounting Kit: PN 7436129 (Includes poles and harnesses)
- 1 Laser Transmitter: Dual Slope: GL722 PN 6680073
- 4 Tripod: PN 6688806
- 5 108" / 274 cm Grader: PN 7182060 or 96" / 244 cm Grader: PN 7160005
- Loader must be equipped with an Attachment Control Kit.
 In case of a non-HF machine, order this kit from Parts.
 7-pin Attachment Control Kit for G > K-series loaders: PN 6733142
 7-pin Attachment Control Kit for M-series loaders: PN 7128426
- Optional End-Wing Kit: PN 7177684

► GRADER 244 CM AND 274 CM WITH SONIC TRACER



- 1 96" / 244 cm Grader: PN 7160005 or 108" / 274 cm Grader: PN 7182060
- 2 Mounting Hardware: PN 7211624
- 3 Sonic Tracer Package: PN 7023454. Includes 1 sonic tracer, 1 rotation sensor, 2 angle sensors
- 4 Optional End-Wing Kit: PN 7177684







SAVE TIME, LABOR & MONEY WITH THE BOBCAT GRADER

- ▶ High grading and precision capabilities through 6-way hydraulically controlled blade
- ▶ For increased productivity, a standard side shift is installed, and can be controlled from the cab, as well as the blade
- Optional laser equipment or sonic tracers for optimum precise grade control and dual slope accuracy
- Cost efficiency: Compact, maneuverable and leaves no waste material

MORE INFO ON WWW.BOBCAT.COM

GRAPPLE, FARM – UTILITY ON BUCKET



Features & Benefits

- Move hard to handle materials easily.
- · Hydraulically controlled grapple is easy to operate.
- Exclusive Bob-Tach™ mounting system lets you change to another attachment quickly.
- Grapple design allows you to get the forks or bucket close to fences or the sides of walls.



ADDITIONAL TINES ARE AVAILABLE THROUGH

Farm/Utility Grapple: To be attached on bucket. It is recommended to use a port

Description: This is the easy way to handle loose hay, bedding and manure on the farm and other sites. Use the utility bucket by itself or add the hydraulic grapple for more gripping power.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Farm/Utility Grapple on Bucket, 81 cm, 3 Teeth	7125370	81	1020	3	5	180	814	78	No	Standard	None
Farm/Utility Grapple on Bucket, 140 cm, 4 Teeth, C/I	7176977	138	1063	4	8	190	775	90	No	Standard	None
Farm/Utility Grapple on Bucket, 140 cm, 4 Teeth, GP	7176783.EA	138	1065	4	8	190	770	90	No	Standard	None

COMPATIBILITY CHARTS																						
				Coi	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Bucket Part Number	Grapple Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	Н/0Е9S	S650/H	Н/9/S	S770/H	S/H/98S
Bucket, GP, 91 cm	7114488.EA	7125370	Х							Χ												
Bucket, GP, 112 cm	7114581.EA	7125370	Χ							Χ												
Bucket, GP, 127 cm, S70	7114583.EA	7125370								Χ												
Bucket, GP, 127 cm, S100	7114582.EA	7125370									Χ											
Bucket, GP, 142 cm	7114584.EA	7125370									Χ	Χ										
Bucket, GP, 157 cm	7114585.EA	7176783.EA		Χ								Χ	Χ	Χ	Χ							
Bucket, GP, 173 cm	7114586.EA	7176783.EA										Χ	Χ	Χ	Χ							
Bucket, GP, 188 cm	7114587.EA	7176783.EA										Χ	Χ	Χ	Χ							
Bucket, LP, 157 cm	6731415.EA	7176977		Χ		Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ			Χ		Χ
Bucket, LP, 173 cm	6731418.EA	7176977			Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, LP, 188 cm	6731421.EA	7176977			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, LP, 203 cm	6731424.EA	7176977					Χ	Χ									Χ	Χ	Χ	Χ	Χ	Χ
Bucket, CI, 157 cm	6731403.EA	7176977										Χ	Χ	Χ	Χ	Χ	Χ			Χ		Χ
Bucket, CI, 173 cm	6731406.EA	7176977			Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		Χ
Bucket, CI, 188 cm	6731409.EA	7176977			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Bucket, CI, 203 cm	6731412.EA	7176977					Χ	Χ	Χ								Χ	Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES

Note: It's recommended to install a port relief on the loader for use with farm/utility grapples.

			Co	mpact	Track	(Load	ers							Skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Port Relief, 275 bar **	6684646		Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Port Relief Valve **	7417122							Χ													Χ
Port Relief Valve **	7360694				Χ	Χ										Χ			Χ		



GRAPPLE, FARM – UTILITY ON FORK



Hydraulically controlled grapple is easy to operate.

- Move hard to handle materials easily.
- Exclusive Bob-Tach™ mounting system lets you change to

Features & Benefits

- another attachment quickly.
- Grapple design allows you to get the forks or bucket close to fences or the sides of walls.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Farm/Utility Grapple on Utility Fork, 81 cm, 3 Teeth	6966687.EA	81	1020	3	5	-	-	36	No	Standard	None
Farm/Utility Grapple on Utility Fork, 140 cm, 4 Teeth,	7176977	138	1063	4	8	190	775	90	No	Standard	None

Description: This is the easy way to handle loose hay, bedding and manure on the farm and other sites. Use the utility fork by itself or add the hydraulic grapple for more gripping power.


COMPATIBILITY CHARTS																						
				Co	mpact	Track	Load	ers						5	skid-S	teer L	oader	s				
Description	Utility Fork Part Number	Grapple Part Number	MT100	T450	1590/Н	H/991	H/9/1	H/0/L1	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Utility Fork, 91 cm, 5 Teeth	6966230.EA	6966687.EA	Χ							Х												
Utility Fork, 122 cm, 6 Teeth	6966232.EA	6966687.EA									Χ	Χ										
Utility Fork, 137 cm, 7 Teeth	6966227.EA	6966687.EA		Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ						
Utility Fork, 152 cm, 8 Teeth	6966229.EA	7176977		Χ	Χ	Χ	Χ					Χ	Χ	Х	Χ	Χ		Χ	Χ	Χ		Χ
Utility Fork, 167 cm, 9 Teeth	6966231.EA	7176977		Χ	Χ							Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		Χ
Utility Fork, 183 cm, 10 Teeth	6966228.EA	7176977		Χ	Χ	Χ	Χ					Χ	Χ	Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Utility Fork, 203 cm, 11 Teeth	7107243.EA	7176977		Χ	Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES Note: It's recommended to install a port relief on the loader for use with farm/utility grapples. Port Relief, 275 bar ** 6684646 Port Relief Valve ** 7417122 Port Relief Valve **

2025/2026 105 ** To be ordered through Bobcat Parts ** To be ordered through Bobcat Parts

GRAPPLE, INDUSTRIAL



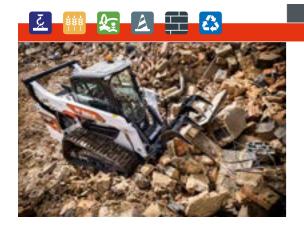

uirements Features & Benefits

- Move hard to handle materials easily.
- Powerful independant grapples (2) secure uneven loads.
- Hydraulically controlled grapple is easy to operate.
- · Handles bulky, uneven loads securely.

Industrial Grapple: Includes Bolt-On Cutting Edge. It is recommended to use

Description: Built tough for reliability and endurance, the industrial bucket and fork with grapple will easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Number of Grapples	Number of Teeth STD	Number of Teeth Max.	Max. Open Height (cm)	Jaw Open- ing at Max. Open Height (cm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installa- tion Time
Grapple, Industrial Bucket, 91 cm	7493574	91	1 × 6	-	-	108	80	165	No	Standard	2.5 h
Grapple, Industrial Bucket, 122 cm	7493572	122	1 × 6	-	-	108	80	202	No	Standard	2.5 h
Grapple, Industrial Bucket, 158 cm	7483067	158	2 × 2	-	-	114	98	434	No	Standard	2.5 h
Grapple, Industrial Bucket, 178 cm	7483069	178	2 × 2	-	-	114	98	453	No	Standard	2.5 h
Grapple, Industrial Bucket, 188 cm	7488345	188	2 × 2	-	-	114	98	472	No	Standard	2.5 h
Grapple, Industrial Bucket, 203 cm	7481680	203	2 × 2	-	-	122	96	569	No	Standard	2.5 h
Grapple, Industrial Fork, 170 cm	7488273	170	2 × 2	7	13	113	89	450	No	Standard	2.5 h
Grapple, Industrial Fork, 203 cm	7483691	203	2 × 2	8	15	119	93	554	No	Standard	2.5 h

COMPATIBILITY CHARTS																					
			Co	mpact	Track	(Load	ers						5	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	Н/991	Н/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Grapple, Industrial Bucket, 91 cm	7493574	Х							Х												
Grapple, Industrial Bucket, 122 cm	7493572	Χ								Χ											
Grapple, Industrial Bucket, 158 cm	7483067		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ					
Grapple, Industrial Bucket, 178 cm	7483069		Χ	Χ	Χ	Х					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Grapple, Industrial Bucket, 188 cm	7488345			Χ	Χ	Χ											Χ	Χ	Χ	Χ	Χ
Grapple, Industrial Bucket, 203 cm	7481680					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
Grapple, Industrial Fork, 170 cm	7488273		Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Grapple, Industrial Fork, 203 cm	7483691				Χ	Χ	Χ	Χ									Χ	Χ		Χ	Х

OPTIO	NS /	ACCES	SOR	IES

Note: It's recommended to install a port relief on the loader for use with farm/utility grapples.

		er 0011W 1		mpact	•		ers						;	Skid-S	teer L	oaders	;				
Description	Part Number	MT100	T450	Т590/Н	Н/991	H/9/1	H/0/71	Z/H/98T	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	N/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Port Relief, 275 bar **	6684646		Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Port Relief Valve **	7417122							Χ													Χ
Port Relief Valve **	7360694				Χ	Χ										Χ			Χ		



GRAPPLE, ROOT





Root Grapple: It is recommended to use a port relief valve.

- Heavy duty design improves wear life in tough land clearing and demolition applications.
- Curved tooth design permits material to be picked up without driving teeth into the ground and allows dirt to fall between teeth, leaving dirt on side.

Features & Benefits

- Fully enclosed mounting frame extends wear life by minimizing flexing in frame area.
- Inertia-welded cylinder ends a Bobcat exclusive permit strong, smooth, durable grapple operation by improving hydraulic cushioning at the end of the stroke.
- Protected hydraulic hoses limit damage to hoses from

Description: Built tough for reliability and endurance, the root grapple easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS First Use Installation Description Root Grapple, 91 cm 7493347 109 143 Standard Root Grapple, 122 cm 7493345 122 109 179 Standard Root Grapple, 168 cm 7493610 168 131 453 Standard Root Grapple, 183 cm 7488431 183 131 111 476 Standard Root Grapple, 203 cm 7483226 203 131 111 528

COMPATIBILITY CHARTS																					
			Co	mpact	Track	(Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	H/0/L1	T86/H/S	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
Root Grapple, 91 cm	7493347	Х							Х												
Root Grapple, 122 cm	7493345	Х	Χ							Χ	Χ										
Root Grapple, 168 cm	7493610		Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ					
Root Grapple, 183 cm	7488431			Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Root Grapple, 203 cm	7483226					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES

Note: It's recommended to install a port relief on the loader for use with farm/utility grapples.

Note. It's recommended to mistail a port relief	ull the loader for t	use wit	II Idiiii	utility	yrappi	ts.															
			Co	mpac	t Track	(Load	ers						:	Skid-S	teer L	oaders	s				
Description	Part Number	MT100	T450	T590/H	H/991	Н/9/1	H/0/71	Z/H/981	870	\$100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Port Relief, 275 bar **	6684646		Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Port Relief Valve **	7417122							Х													Χ
Port Relief Valve **	7360694				Χ	Χ										Χ			Χ		

B4501805-EN (01-25)

LANDPLANE





Features & Benefits

- Allows controlled grading and levelling in both forward and reverse directions.
- Can be used like a bucket to transport material on site.
- Peels and removes sod.
- Scarifier breaks up hard ground.
- Sorts unwanted debris from soil.
- Pulverises soil clods Aerates soil for seeding and sodding.
- Bob-Tach™ mounted.
- · Bidirectional operation.
- Bidirectional scarifier. • Removable screen.
- Landplane: Includes expanded metal grate, scarifier assembly, teeth and respective

Description: A landscaping must. It grades and levels in both forward and reverse and peels and removes sod. The deluxe landplane includes a bidirectional scarifier and removable screen to pulverise soil clods, aerates and sorts debris from soil.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (cm)	Digging depth (cm)	Cutting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Landplane Deluxe, 122 cm	6907173	122	7.6	12.7 × 102	191	No	Standard	None
Landplane Deluxe, 198 cm	6906115	198	8.9	12.7 × 152	304	No	Standard	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	(Load	lers						٤	Skid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Н/065Т	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Landplane Deluxe, 122 cm	6907173	Χ							Χ	Χ											
Landplane Deluxe, 198 cm	6906115		Χ	Х	Х	Х	Х	Х			Χ	Χ	Χ	Х	Х	Χ	Х	Χ	Χ	Χ	Χ



LANDSCAPE RAKE





Landscape Rake: No special requirement.

• Picks up rocks down to 19 mm and larger, and most 13 mm rocks.

· Hydraulic cylinder opens top cover - for easier dumping, and also allows the bucket and cutting edge to be used to push and scrape debris.

Features & Benefits

- Rake bars provide better levelling by providing longer ground contact.

 • Hardened teeth for longer wear.
- Side skis, which are adjustable, provide depth control and leave only a slight "knife-edge" mark in the finished surface.

Description: The perfect landscape finishing tool. It rakes and collects surface debris as it smoothes and levels the soil. Picks up rocks 19 mm and larger, as well as most 13 mm rocks. Adjustable side skis provide depth control.

FECHNICAL SPECIFICATIONS First Use nber of **Control Kit** of Teeth Landscape Rake, 5B 6709107 152 12 384 340 503 Standard None Landscape Rake, 6B 6710630 12 400 560 Standard None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	H/9/1	H/0/11	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	S76/H	N/077S	S/H/98S
Landscape Rake, 5B	6709107		Х	Х	Х	Х					Х	Х	Х	Х	Х		Х	Х	Х		
Landscape Rake, 6B	6710630			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ





ALWAYS USE THE LANDSCAPE RAKE GOING IN REVERSE. BEWARE THAT THE GROUND SHOULD NEITHER BE DRY NOR **TOO WET FOR OPTIMUM PERFORMANCE**

COMPACT LOADERS

B4501805-EN (01-25)

LASER EQUIPMENT






Description: The laser equipment offers the most innovative features to help you get to grade faster with increased accuracy.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Туре	Radio Remote	Temperature compensa- tion	Auto Axis Alignment	Range (Diameter)	Accuracy	Weight (kg)	Control Kit Required	First Use Installation Time
Laser Transmitter, Dual Slope, GL7221	6680073	Dual Slope	Yes	-	Yes	900 m	4.6 arc sec	8.5	No	None
Laser Receiver, LR410	7436330	360° laser reception	-	-	-	-	-	2.8	No	None
LR410 Mount Receiver Kit for Grader 213 cm	7436128	-	-	-	-	-	-	21	No	1 h
LR410 Mount Receiver Kit for Grader 244 & 274 cm	7436129	-	-	-	-	-	-	25	No	0.5 h
LR410 Mount Receiver Kit for HD Box Blade	7436108	-	-	-	-	-	-	21	No	0.25 h

¹Tripod needed for accurate depth control. See in Accessories

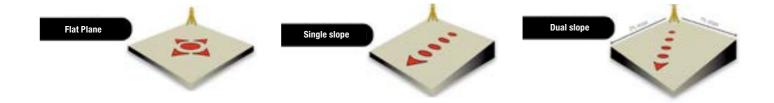


			Coi	npact	Track	Load	ers							kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н290/Н	Н/991	H/9/1	H/0/L1	T86/H/S	870	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	S76/H	S770/H	S/H/98S
Laser Transmitter, Dual Slope, GL7221	6680073		Х	Х	Х	Х	Х	Х			Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ
Laser Receiver, LR410	7436330		Χ	Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х	Х	Χ
LR410 Mount Receiver Kit for Grader 213 cm	7436128		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
LR410 Mount Receiver Kit for Grader 244 & 274 cm	7436129					Χ	Χ	Х												Х	Χ
LR410 Mount Receiver Kit for HD Box Blade	7436108			Χ	Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х

¹Tripod needed for accurate depth control. See in Accessories

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
Tripod	6688806	6
LR410 Carry Case	7436112	3.2



110 2025/2026 **111**

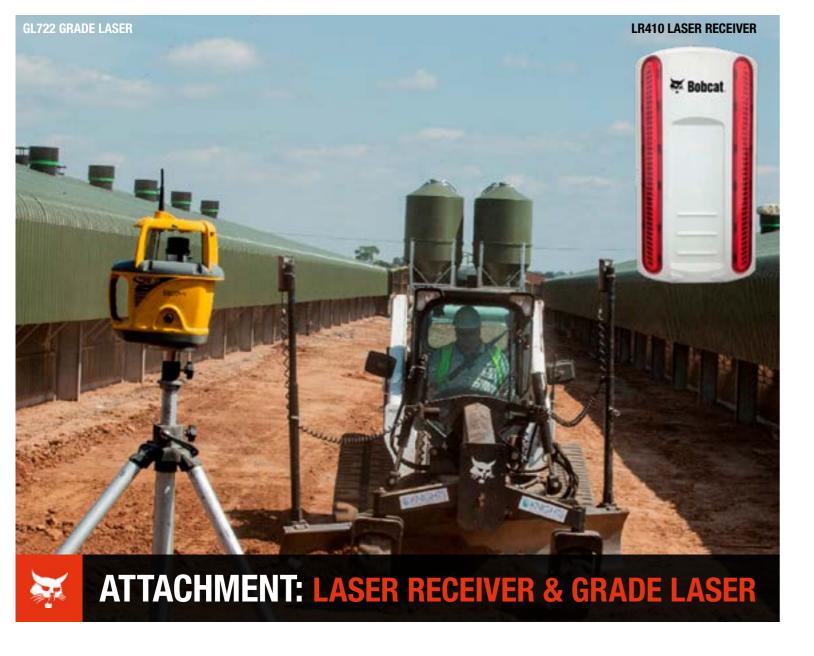

HIGH ACCURACY WITH THE BOBCAT GRADE LASER TRANSMITTER AND RECEIVER

LR410 LASER RECEIVER


- The Automatic Lift Control System will continually provide the maximum accuracy in any grading task.
- Operate worry-free on a jobsite with the anti-strobe feature, eliminating equipment interference.
- This receiver is fully weatherproof for maximum productivity in any weather conditions.

GL722 GRADE LASER

- Easy access points, and the intuitive controls enables quick and efficient control changes from the comfort of the cab, increasing operator productivity.
- The Automatic Axis Alignment eliminates the need to manually align the laser to your grade hub, giving you an accurate result each time.

MORE INFO ON WWW.BOBCAT.COM

LOG GRAPPLE

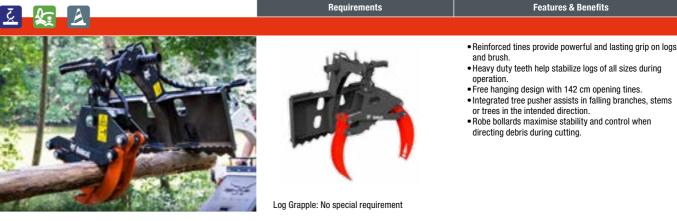

Description: Meet the challenging demands of landscaping and municipality jobsites with our new log grapple! Loading logs onto trailers or transporting material out of your yard has never been easier. This free-hanging log grapple attachment has the brute force and agility to lift and move heavy logs and brush - even on tight worksites or properties.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Cylinder Stroke	Cylinder Bore Diameter	Cylinder Rod Diameter	Max. Opening (mm)	Max. Reach (mm)	Weight (kg)	Control Kit Required
Log Grapple 56"	7401254	190.2	50.8	31.8	1429	1726	152	No

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						5	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0/71	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	N/077S	S/H/98S
Log Grapple 56"	7401254	Χ																			

COMPACT LOADERS B4501805-EN (01-25)

MIXING BUCKET





Features & Benefits

- Side discharge system.
 Mix and dump functions are fingertip controlled.
- Mix while driving.



Mixing Bucket: No special requirement.

Description: This rugged, cost-effective attachment lets you mix, transport and pour concrete much quicker than a stand alone mixer. Its compact size makes it ideal for sidewalks, driveways, finish work, footings and floors of small buildings and hard-to-reach or limited access areas.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Capacity (I)	Max. Granular Size (mm)	Average Mixing Time (min.)	Flow Range (I/min)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Mixing Bucket, MB200SD, BT	7185474	135	200	20	4 - 5	45 - 60	350	73	83	None
Mixing Bucket, MB250SD, BT	7185472	153	250	20	4 - 5	45 - 75	370	73	83	None

COMPATIBILITY CHARTS																					
			Coi	mpact	Track	Load	ers						S	kid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0//1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/9/S	N/077S	S/H/98S
Mixing Bucket, MB200SD, BT	7185474			Х	Х	Х	Х	Х				Х	Х	Х	Х	Х	Х	Х	Х	Χ	Х
Mixing Bucket, MB250SD, BT	7185472			Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ	Χ





• Three partially overlapping blades for clean cutting with no skips.
• Direct hydraulic motor drive.

- Industry standard cutting blades elevate grass for better mulching capability.
 Adjustable cutting height from 51 to 140 mm in 13 mm incomparing.

Features & Benefits

- increments.
- Unique attachment frame allows mower to oscillate independently of loader.
- Rear discharge disperses grass clippings under the carrier, away from buildings, trees and fences.
 Patented blade shutoff device stops blade rotation when mower
- Anti-scalping wheel allows operator to traverse uneven terrain without scalping the surface.

Description: Ideal for rough-cut applications, including road ditch right-of-way, golf course roughs and large acreage mowing. The mower has three partially overlapping blades that cut clean with no skips. It eliminates driving over the grass before cutting, and provides excellent visibility of the work area.

Mower: Not available for Europe.

TECHNICAL SPECIFICATIONS First Use Installa-Control Kit Re-Description Tip Speed 61 m/s @ 57 l/min, 89 m/s @ 83 l/min 1816 51 - 140 400 Mower, 183 cm, Non-CE 7144850 86 No Standard

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	S				
Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0771	T86/H/S	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	N/077S	S/H/98S
Mower, 183 cm, Non-CE	7144850		Χ	Χ			Χ			Х	Χ	Χ	Х	Χ	Х		Χ	Χ		Х	

OPTIONS / ACCESSORIES				
		Mulch Kit	Side Discharge Kit	
Description	Part Number		**	
Mulch Kit, 183 cm **	7144843	*		
Side Discharge Kit, 183 cm **	7144844		A STATE OF THE PARTY OF THE PAR	

114 2025/2026 115 ** To be ordered through Bobcat Parts

B4501805-EN (01-25)

PALLET FORKS





uirements Features & Benefits

• Large, square holes in back screen provide excellent fork/
load visibility.
• Screen made from durable, heavy gauge steel for long life.

Pallet Forks Standard: Need Mounting Frame & Forks.

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Fork Width (cm)	Frame Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Pallet Fork Frame Standard MT100-S70	6809716.T	10	47	No	Standard	0.25 h
Pallet Fork Frame Standard Duty	7297499.T	10	60	No	Standard	0.25 h
Pallet Fork Frame Heavy Duty	7294305.T	10	74	No	Standard	0.25 h
Pallet Fork Frame Severe Duty	7294332.T	10	120	No	Standard	0.25 h

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	ers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	Н/9/S	S770/H	S/H/98S
	Pallet Fork Frame, Standard, MT100-S70	6809716.T	Χ*							Х*												
	Pallet Fork Frame Standard Duty	7297499.T		Х*							Х*	Χ*										
1	Pallet Fork Frame Heavy Duty	7294305.T		Х*	Χ*	Χ*	Х*					Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*		
	Pallet Fork Frame Severe Duty	7294332.T		Х*	Χ*	Х*	Х*	Х*	Х*			Х*	Х*	Х*	Χ*	Х*	Х*	Χ*	Х*	Х*	Χ*	Х*
	Pallet Fork Teeth 91 cm, Heavy Duty, Class 2 (Set of 2)	6540184	Х*	Х*	Χ*					Х*	Х*	Χ*	Х*	Χ*	Χ*	Χ*						
	Pallet Fork Teeth 106 cm, Heavy Duty, Class 2 (Set of 2)	6540183		Х*	Х*	Х*	Х*				Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*		
2	Pallet Fork Teeth 122 cm, Heavy Duty, Class 2 (Set of 2)	6540182		Х*	Х*	Х*	Х*				Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*		
	Pallet Fork Teeth 106 cm, Severe Duty, Class 2 (Set of 2)	6541521		Х*	Х*	Х*	Х*	Х*	Х*			Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*	Х*
	Pallet Fork Teeth 122 cm, Severe Duty, Class 2 (Set of 2)	6541518		Χ*	X*	Χ*	Χ*	Χ*	Χ*			Χ*	Χ*	Χ*	Х*	Х*	Χ*	Х*	Х*	Х*	Х*	Х*

^{*} Pay attention to the max. pallet fork frame load rating.

OPTIONS / ACCESSORIES	
Description	Part Number
Brick-Guard Center for NEW STD and HD Pallet Fork Frame	7306978
Brick-Guard Extension for NEW Severe Duty Pallet Fork Frame	7306981

MAXIMUM PALLET FORK FRAI	ME LOAD RATING	
Standard Duty (kg)	Heavy Duty (kg)	Severe Duty (kg)
1130	1810	2495



SEVERE DUTY FRAMES SHOULD
BE ONLY USED WITH SEVERE DUTY



PALLET FORKS, HYDRAULIC

operator's seat.



Large, square holes in back screen provide excellent fork/load visibility.
 Screen made from durable, heavy gauge steel for long life.
 Hydraulic Pallet Fork Positioner Attachment is available for easier handling of varying pallet sizes without leaving the

Features & Benefits

Pallet Forks Hydraulic: Includes Back Frame and 2 hydraulically adjustable teeth.

Frame and 2 nyuradiicany adjustable teetii.

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles.

TECHNICAL SPECIFICATIONS							
Description	Part Number	Fork Length (cm)	Fork Width (cm)	Frame Weight (kg)	Control Kit Required	Working Flow	First use installation time
Pallet Fork Frame, Hydraulic, 122 cm	6905425	122	10	356	No	Standard	None

COMPATIBILITY CHARTS																					
			Coi	mpact	Track	Load	ers						5	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	Н/991	Н/9/1	H/0/11	T86/H/S	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	H/059S	Н/9/S	S770/H	S/H/98S
Pallet Fork Frame, Hydraulic, 122 cm	6905425		Χ	Χ	Χ	Х	Х	Х			Х	Χ	Х	Χ	Х	Χ	Х	Х	Х	Х	Χ

COMPACT LOADERS

B4501805-EN (01-25)

PLANER, SELF-LEVELLING





	21
	• D
	• • • •

Self-levelling Planer: For High and Super Flow

Loader must be equipped with an Attachment

- Teeth life: 20 - 60 hours
- Drum life: 300 - 800 hours
- Attachment Control Kit
- Production rate: 40 - 50 m²/h
 - * Performances are estimated only and can vary depending on the type of concrete, depth of use, operator experience,
- Top access panel for easier bit service and maintenance.
 Self-levelling feature for following irregular surfaces.

Features & Benefits

- Hydraulic side-shift for planing close to walls and curbs, and to easily reposition the drum for another pass.
- Hydraulic depth adjustment on each ski for constant contact to the ground, even working with one ski on the curb or on the surface already milled.
- Hydraulic planer tilting for planing sloping surfaces or to match two uneven surfaces.
- Direct-drive high torque motors for low maintenance and high efficiency.
- Bob-Tach™ mounting system with quick-connect controls

 for fast, easy attachment changes.

Description: Equipped with direct-drive, high-torque hydraulic motor. These low maintenance attachments efficiently mill asphalt or concrete. Planers feature hydraulic side-shift, hydraulic independent ski depth control and hydraulic tilting. Self-levelling ski. Make precise adjustments with fingertip controls. Operate with Super Flow technology for increased operation productivity on the jobsite.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Max. Cutting Width (cm)	Cutting Depth (with std drum) (cm)	Max. Cutting Angle ± (°)	Side- shift (cm)	Min. Planing Distance Next to Curb (cm)	Number of Bits	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Self-levelling Planer, 45 cm	7221391	45	15	8	65	7,5	42	742	Yes	High Flow	None
Self-levelling Planer, 45 cm, with surface cut drum	7221391.SC	40	N/A	8	65	7,5	208	760	Yes	High Flow	None
Self-levelling Planer, 50 cm	7331126	50	17	8	65	7,5	42	845	Yes	High Flow	None
Self-levelling Planer, 60 cm	7221392	60	17	8	65	7,5	54	910	Yes	High Flow	None
Self-levelling Planer, 60 cm	7430052	60	17	8	65	7,9	54	1000	Yes	High & Super Flow	None
Self-levelling Planer, 100 cm	6726632	102	13	8	52	7,1	78	1032	Yes	High & Super Flow *	None
Self-levelling Planer, 100 cm with 60 (fixed)/40 (removable) drum	1111142	100	13	8	52	7,5	54/32	1095	Yes	High & Super Flow *	None
Self-levelling Planer, 120 cm	7430053	120	13	8	41	10	90	1200	Yes	High & Super Flow	None
Self-Levelling Planer, 150 cm	7491343	150	13	8	35	10,4	114	1260	Yes	High & Super Flow	None

^{*} from S/N 991403650; below = High Flow only

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	Н/991	H/9/1	Н/0/11	S/H/981	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Self-levelling Planer, 45 cm	7221391			Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		
	Self-levelling Planer, 45 cm, with surface cut drum	7221391.SC			Х	Х	Х						Х	Х	Х	Х	Х	Х	Х	Х		
	Self-levelling Planer, 50 cm	7331126			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Self-levelling Planer, 60 cm	7221392			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
0	Self-levelling Planer, 60 cm	7430052							Χ													Χ
	Self-levelling Planer, 100 cm	6726632					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
	Self-levelling Planer, 100 cm with 60 (fixed) / 40 (removable) drum	1111142					Х	Х	Х									Х	Х	Х	Χ	X
	Self-levelling Planer, 120 cm	7430053						Χ	Χ												Χ	Χ
	Self-levelling Planer, 150 cm	7491343					Χ		Χ											Χ		Χ



HIGH & SUPER FLOW MACHINES ONLY!

OPTIONS / ACCESSORIES			
Description	Part Number	Number of Bits	Weight (kg)
PSL 45 cm, Kit Nozzle Spray	7532575	-	5
Drum Surface Cut, Width = 40 cm, for PSL 45 cm	7307800	208	168
Drum Width = 30 cm, for PSL 45 cm	7307802	36	93
Drum Surface Width 40 cm, for PSL 60 cm SF	7481360	208	165
Drum Standard Width = 45 cm, for PSL 45 cm	7245741	42	123
PSL 50, Kit Nozzle Spray	7532576	-	5
PSL 60, Kit Nozzle Spray	7532577	-	5
Drum Standard Width = 50 cm, for PSL 50 & 60 cm	7337658	42	133
Drum, Surface Cut, Width = 40 cm, for PSL 50 & 60 cm	7338345	208	186
Drum Standard Width = 50 cm, for PSL 60 cm SF	7481359	42	136
Drum Standard Width = 60 cm , for PSL 60 cm	7245754	54	153
Drum Surface Cut, Width = 61 cm, for PSL 60 cm	7307801	306	244
Drum Standard Width = 60 cm, for PSL 60 cm SF	7481358	54	173
Drum Surface Width = 60 cm , for PSL 60 cm SF	7481361	306	260
PSL 100 cm, Kit Nozzle Spray	7532578	-	6
Drum Standard Width = 100 cm, for PSL 100 cm	6676767	78	258
Drum Surface Cut, Width = 100 cm, for PSL 100 cm	7330324	508	310
Drum 60 Fixed/40 Removable, for PSL 100 cm	7330325	78	313
PSL 120 cm, Kit Nozzle Spray	7532579	-	6
PSL 150 cm, Kit Nozzle Spray	7532580	-	6







DESIGNED TO SPRAY HIGH PRESSURE WATER ON ROADS OR ANY KIND OF SURFACE

- Plug&Play connect and start to work for peace of mind
- **▶** Compact Design for maximum efficiency and easy transport
- ▶ Hydraulically adjustable front sprayer to adapt to all street conditions
- ▶ Floating front wheel (M/L) allows the pressure washer to work smoothly and quicker
- **Easy to use and clean** gets the job done quickly and safely with consistent results
- ▶ HPW (High Pressure Pump) no rotating parts makes it durable and low maintenance
- ▶ Washing handgun and 20-meter hose reel easy switch from front sprayer to washing handgun which makes cleaning apartment entrances, corners, statues, machines, cars, benches, signs, and all tight spaces effective and easy

MORE INFO ON WWW.BOBCAT.COM



PRESSURE WASHER



 Plug & Play enables the operator to connect the attachment to the machine within seconds

· Compact Design for working in tight spaces and ease of

• Hydraulically adjustable front sprayer helps to adapt to all street conditions
• Floating front wheel allows the Pressure Washer to work

Features & Benefits

smoothly and faster

 High Pressure Pump – No rotating parts makes it durable and low maintenance

· Washing handgun with 20 meters hose reel

· Dustfree cleaning before laying bituminous material

Description: The Bobcat Pressure Washer is a versatile attachment that can be used to clean and sanitize streets (model 220L is not suitable for sanitization needs), remove graffitis and even for railroad, bridge or tunnel maintenance. It's dustfree design enables the attachment to be used when laying asphalt, providing a clean surface for bituminous material laying. Designed to spray high pressured water on roads or any kind of surface that needs to be cleaned. Washing handgun with 20 meters hose reel makes cleaning effective and easy.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Sprayer Width (mm)	Max. Water Pressure (bar)	Max. Water (I/min)	Water Tank Capacity (I)	Degree of Sprayer Angle	Operat- ing Weight (kg)	Ship- ping Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Pressure Washer KC19-250S	7418713	1250	250	30	270	± 19° (mech.)	369	99	No	Standard	None
Pressure Washer KC19-250M	7418714	1650	250	30	540	± 20° (hydr. cyl.)	765	225	Yes	Standard	None
Pressure Washer KC19-250L	7418715	1650	250	30	810	± 20° (hydr. cyl.)	1071	261	Yes	Standard	None
Pressure Washer KC19-220L	7420822	1580	220	50	810	± 20° (hydr. cyl.)	1078	268	Yes	Standard	None

CON	IPATIBILITY CHARTS																					
				Coi	mpact	Track	Load	lers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Н/0651	Н/991	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/9/S	S770/H	S/H/98S
	Pressure Washer KC19-250S	7418713									Χ											
n	Pressure Washer KC19-250M	7418714		Χ	Х	Χ	Χ	Χ	Х			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
۳	Pressure Washer KC19-250L	7418715			Χ	Χ	Χ	Χ	Χ								Χ	Χ	Χ	Χ	Χ	Χ
	Pressure Washer KC19-220L	7420822			Χ	Χ	Χ	Χ	Х								Χ	Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Fl	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	6733142									Χ											
2	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
۷	7-Pin Attachment Control Kit **	7128426			Х			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES						
Description	Part Number	Max. Pressure Output (bar)	Sand Consumption (kg/h)	Sand Grain Size (mm)	Weight (kg)	First Use Installation Time
Sand blasting kit	7423360	200	200 - 450	0.2 - 1.4	6	None

REAR STABILIZERS



Description: Increase your auger, backhoe or tree spade performance in a wide range of jobs with a set of frame-mounted rear stabilizers. Rear stabilizers improve performance by transferring the weight of the loader to the auger, backhoe or tree spade where it's needed for better digging capability. Rear stabilizers also assist in levelling the loader on uneven terrain. Rear stabilizers are available for most Bobcat loaders and can be quickly mounted and removed.

TECHNICAL SPECIFICATIONS					
Description	Part Number	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Rear Stabilizers	6811449 **	118	No	Standard	2.5 h

COI	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	lers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0771	S/H/981	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	H/077S	S/H/98S
	Rear Stabilizers Mounting Kit	7152508		Х	Χ								Χ	Χ	Χ	Χ		Х	Χ			
	Rear Stabilizers Mounting Kit	7152512						Χ													Χ	
0	Rear Stabilizers Mounting Kit **	7393164					Χ													Χ		
	Rear Stabilizers Mounting Kit **	7415849				Χ											Χ					
	Rear Stabilizers Mounting Kit **	7453977							Χ													Χ
2	Rear Stabilizers	6811449 **		Х	Х	Х	Х	Χ	Χ				Χ	Х	Χ	Χ	Х	Х	Χ	Х	Х	Χ

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
Counterweight Kit, 137 kg **	6811455	137
Rear Auxiliary Line Kit 400 series **	7249869	35
Rear Auxiliary Line Kit 500 series **	7229294	35
Rear Auxiliary Line Kit 600 series **	7231436	45
Rear Auxiliary Line Kit 700 series **	7220912	55
Rear Auxiliary Line Kit S66/T66 **	7422032	35
Rear Auxiliary Line Kit S76/T76 **	7307980	35
Rear Auxiliary Line Kit S86/T86 **	7214605	66



WORKS GREAT WITH BACKHOES, AUGERS AND TREE TRANSPLANTERS AMONG OTHER **ATTACHMENTS**



REMOTE CONTROL



Description: Control your Bobcat loader without the need to be in the cab. This easily portable radio remote control system can be mounted on the carrier within minutes, compatible with all loaders equipped with a Selectable Joystick Control.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Range of transmitting (m)	Expected operating hours	Charging time	Operating temperature	Storage tempera- ture (with battery)	Frequency	Control Kit Required	First Use Installation Time
Remote Control Kit	7340906	500	~ 20 hours	~ 7 hours (full charge)	-30°C to +58°C	-30°C to +60°C	2.4 GHz	Yes	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						8	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	Н/991	H/9/1	H/0/11	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Remote Control Kit	7340906		Х	Х	Х*	Χ*	Х	Χ*		Х	Х	Х	Х	Х	Х	Х*	Х	Х	Х*	Х	Χ*

OPTIONS / ACCESSORIES	
Description	Part Number
Rear window removal kit **	6725946
R-series rear window removal kit **	7407739



SUPPLIED WITH TWO EXCHANGEABLE BATTERIES



REAR WINDOW REMOVAL KIT IS ORDERABLE THROUGH PARTS **

Note: Remote Control is compatible for loaders with service analyzer version V57.0 (6/4/2007) or above. SJC controls needed for application.

APPROVED ATTACHMENTS			
Angle Broom	Bucket Skeleton	Pallet Fork	Soil Conditioner
Auger	Bucket Snow	Planer	Stump Grinder
Bale Fork	Box Blade	Root Grapple	Sweeper
Breaker	Dozer Blade	Scarifier	Tiller
Bucket Combo	Dumping Hopper	Scraper	Tilt-Tach
Bucket C/I	Farm Grapple	Snow Blade	Tree Transplanter
Bucket Dirt	Grader	Snow Blower	Trencher
Bucket Fertilizer	Industrial Grapple	Snow Pusher	Vibratory Roller
Bucket GP	Land Plane	Snow V-Blade	Wheel Saw
Bucket Lo-Pro	Landscape Rake	Sod Layer	







CONTROLLING THE MACHINE WITH THE REMOTE CONTROL KIT


- ▶ Thanks to the unique Plug and Play feature, this easily portable industrial remote control solution that can be interchanged between carriers in less than a minute
- **b** By controlling the machine from the outside, the operator has a full visibility on the attachment making it even more versatile in certain applications. It allows easier communication at the jobsite, as it allows the operator to walk around, and manage his surroundings better
- ▶ The remote control distances the operator from dust, noise, vibrations or jobsites that require special safety precautions
- Work can be done faster and with higher precision, while it can also reduce the workforce needed (no more need of a support operator)

Learn more on page 123

MORE INFO ON WWW.BOBCAT.COM



SALT & SAND SPREADER

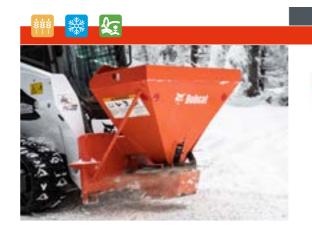



Salt & Sand Spreader: No specia

• Ideal to spread salt and sand but also fertilizers and seeds

Features & Benefits

- Three gates allow you spread up to 180° and up to 8 m
- Self-loading from a stockpile like a normal bucket with a capacity of 0.33 m³.

 • An agitator is located in the hopper to facilitate the flow of
- caked material.
- · Large chunks of sand and salt are filtered through the screen at the top of the hopper for even, consistent flow.
- · A cab control allows you to regulate the spinner wheel rpm directly from the operator's seat.

Description: Ideal for spreading in confined areas such as parking lots and pedestrian zones where larger equipment cannot be used. Also excellent for spreading fertiliser and seed.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Hopper Capacity Struck (m³)	Hopper Capacity Heaped (m³)	Spreading Pattern	Spinner Wheel Diameter (cm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Salt & Sand Spreader, HS8	7157284	138	0.27	0.33	5.6 m @ 1500 rpm 6.8 m @ 2000 rpm 8.2 m @ 2500 rpm	45	198	No	Standard	None


COMPATIBILITY CHARTS																					
			Coi	mpact	Track	Load	ers						S	skid-S	teer L	oader	S				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0/11	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Salt & Sand Spreader, HS8	7157284		Х	Х	Х	Х	Х	Х			Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ

OPTIONS / ACCESSORIES		
	Description	Part Number
Sidewalk Kit for Spreader, •Limits the spread pattern depending on the mounti	n to a width of 73 cm or 94 cm,	7157412

2025/2026 125 ** To be ordered through Bobcat Parts

SAND CLEANER



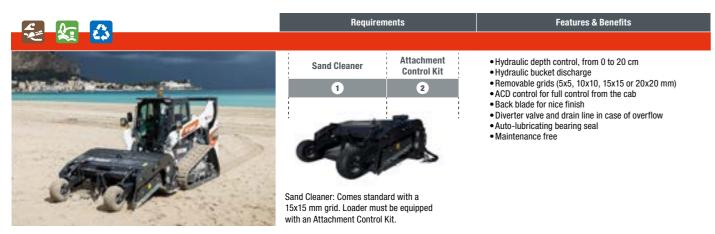

Description: Keep the beach clean and quickly remove any litter by using the Bobcat Sand Cleaner. It allows you to sift the sand and collect debris as small as cigarette butts. Could be used on public beaches or private resorts, kids playgrounds, volleyball pitches, racing tracks, farms, ...

TECHNICAL SPECIFICATIONS											
Description	Part Number	Work- ing width (mm)	Working depth (mm)	Bucket capacity (I)	Perfor- mance (m²/h) *	Working Pressure (bar)	Work- ing Flow (I/min)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Sand Cleaner – SC200	7280080	1900	up to 200	350	up to 15000	80	40	715	Yes	Standard	None

C	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	lers						s	kid-S	teer L	oader	s				
ı	Description	Part Number	MT100	T450	T590/H	Н/991	H/9/1	H/0//T	Z/H/981	870	\$100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
1	Sand Cleaner – SC200	7280080			Χ	Χ	Χ	Χ	Х								Χ	Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	ndard on High Fl	ow (H)	mach	ines.																	
(2	7-Pin Attachment Control kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
ľ	7-Pin Attachment Control kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES				
Description	Part Number	Weight (kg)	Comment	Optimized working position
Screening net 5×5 mm (set of 2 grids, left and right)	7282508	38	For very fine cleaning. Not recommended on wet sand.	9.0
Screening net 10×10 mm (set of 2 grids, left and right)	7283280	35	Able to pick up cigarette ends.	
Screening net 15×15 mm (set of 2 grids, left and right)	7282509	32	Standard grids. Able to pick up cigarette ends.	
Screening net 20×20 mm (set of 2 grids, left and right)	7282510	30	Reinforced grids to collect rocks.	
Sand Cleaner finishing blade	7282339	60	Removes the machine track marks for a nice finish.	Cleaning depth

The SC200 is approved for wheeled Skid-Steer Loaders from B3YZ00214 and above. It is possible to retrofit previous units by the step replacement.



* PERFORMANCES ARE ESTIMATED ONLY AND CAN VARY DEPENDING ON THE TYPE OF CONCRETE, DEPTH OF USE, OPERATOR EXPERIENCE, ...





KEEP IT CLEAN WITH THE BOBCAT SAND CLEANER

- ▶ Collect small debris (cigarette stubs, bottle caps, broken glass, ...) and ensure short cycle time
- ▶ High productivity for great value: Up to 15 000 m²/h and the solution package is half the cost of a dedicated machine
- ▶ Use a Bobcat Root Grapple to pick up large material and to get access to difficult areas
- ldeal for public beach and private resort cleaning, playground, sports fields (Volley ball, beach soccer, ...) and race tracks maintenance, farm terrains and in the recycling/sorting industry

MORE INFO ON WWW.BOBCAT.COM

2025/2026 127
** To be ordered through Bobcat Parts

B4501805-EN (01-25)

SCARIFIER





Features & Benefits

- •The scarifier includes two depth guides and five teeth.
 •Adjustable depth skids for pre-setting digging depth up to
- 15 cm deep.
- Prepares hard packed ground for digging or landscaping
- Rips light asphalt for removal
 Standard five-tooth unit with additional teeth available.
 Bob-Tach™ mounted.

5 teeth.

Description: Has the power to rip apart hard packed ground and prepare for digging or landscaping. The front scarifier has adjustable depth skids for presetting digging depth.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (cm)	Number of Teeth	Max. Digging Depth (cm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Scarifier, 152 cm	6563526	152	5	15	160	No	Standard	0.5 h

Scarifier: Includes 2 Depth Guides and

COMPATIBILITY CHARTS																					
			Co	mpact	Track	c Load	lers						5	Skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0771	S/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	Н/92S	Н/022	S/H/98S
Scarifier, 152 cm	6563526		Χ	Χ	Х	Χ					Χ	χ	Х	χ	Χ	Х	χ	Х	Χ	χ	Х









Remove packed-on materials such as mud, ice and snow.

Features & Benefits

- · Peel away carpet and floor tile.
- Two models: 46 and 56 cm disk diameter.
- Self-sharpening cutting edge.

Description: Use to remove stubborn, packed-on mud, snow and ice from driveways, sidewalks, parking lots, bike paths, wherever build-up occurs. Leaves a smooth surface for safer walking and driving. It easily removes carpet and floor tile as well.

TECHNICAL SPECIFICATIONS Part **Control Kit** Description **Working Flow** 6907177.EA Scraper, Mini 46 59 No Standard None Scraper, Super 56 6675211 78 Standard None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	S				
Description	Part Number	MT100	T450	1590/Н	H/991	H/9/1	H/0/L1	Z/H/98T	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Scraper, Mini	6907177.EA	Х							Х												
Scraper, Super	6675211		Χ	Χ	Χ	Χ	Χ	Χ		Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ



SNOW BLADE







- Snow blades angle 30 degrees to either side, using powerful hydraulic cylinders, to help move snow where you want it
 The blade angle is adjusted from the cab using fingertip controls
 Moldboard has spring trip for component protection in case of hitting a side walk or large stone
 Adjustable depth shoes are standard equipment
 High visibility masts provided to locate blade corners for better visibility of the blade position
 Strong, high-carbon steel cutting edge for long life
 Optional rubber cutting edge to protect pavement surfaces available through Bobcat Parts for 5- to 8-foot models
 Optional end wing kit turns Bobcat snow blades into snow pushers (end wing kit available for 7-foot and 8-foot models only)
 Quick loader hook-up with the exclusive Bob-Tach™ mounting system


Description: An excellent way to quickly remove light or moderate snow from sidewalks and driveways. Moldboard angles right or left up to 30°. High visibility masts help locate blade corners.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Working Width (fully angled) (cm)	Cutting Edge (mm)	Cylin- ders	Trip Springs	Optional Rub- ber Cutting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installa- tion Time
Snow Blade, 183 cm	6905156	183	160	9.5 × 152.4	2	4	25.4 × 152.4	268	No	Standard	0.25 h
Snow Blade, 213 cm	6716836	213	185	9.5 × 152.4	2	4	25.4 × 152.4	281	No	Standard	0.25 h
Snow Blade, 244 cm	6716838	244	210	9.5×152.4	2	4	25.4 × 152.4	299	No	Standard	0.25 h
Snow Blade, HD, 244 cm	7207862	244	211	9.5 × 152.4	1	4	25.4 × 152.4	393	No	Standard	0.25 h
Snow Blade, HD, 274 cm	7207863	274	237	12.7×152.4	1	4	25.4 × 152.4	430	No	Standard	0.25 h

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	Н/991	H/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
Snow Blade, 183 cm	6905156		Х							Х	Х	Χ	Х	Х	Х	Х	Х	Χ	Х		
Snow Blade, 213 cm	6716836		Χ								Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х
Snow Blade, 244 cm	6716838												Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Snow Blade, HD, 244 cm	7207862		Χ	Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Snow Blade, HD, 274 cm	7207863					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES					
Description	Snow Blade 183 cm	Snow Blade 213 cm	Snow Blade 244 cm	Snow Blade HD 244 cm	Snow Blade HD 274 cm
End Wing Kit, Snow Blade **		6716834	6716834		
Replacement Cutting Edge **	6905155	6673634	6673606	7161165	7160646
Wear Edge Kit, Rubber **	6905158	6905400	6905401	6905401	7169615
Wear Edge Kit, Poly **				7169617	7169618














COMPACT LOADERS B4501805-EN (01-25)

SNOW BLOWER

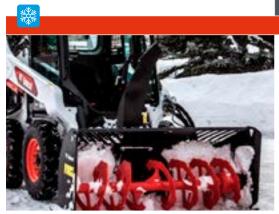

Features & Benefits

- Increased intake height and a larger auger draw in more snow for faster removal.
- Redesigned, rounded intake minimizes clogging and improves snow flow.
- Aggressive auger teeth easily break up and tear through hard-packed snow and ice.
 Reversible and replaceable wear edge bites into hard ice and packed snow and is designed for long life.
- Adjustable side-mounted and skid shoes allow operators
- to set the cleaning depth to match the jobsite.

 The truck loading chute allows the snowblower to place snow high in a truck box for easier removal and hauling.

Snow Blower: Includes a hydraulic motor package. Loader must be equipped with a 7-pin Attachment Control Kit.

Description: Clear snow off driveways, parking lots and sidewalks with our Bobcat snow blower. The snowblower attachments feature a new and extremely durable direct-drive, sprocket-style chute that operators can rotate to throw snow in virtually any direction and place it wherever the job requires - even hard-to-reach places.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Outside Width (mm)	Hydraulic Motor Package	Auger Diameter (mm)	Fan Diam- eter (mm)	Height (mm)	Side Height (mm)	Flow Range (L/m)	Working Flow	Control Kit Required
Snow Blower 26x48	M7053*5653112	1219	OMPX 50	356	381	1511	673	30.3 - 45.4	Standard	Yes
Snow Blower 32x60	M7046*5735371	1562	WS 100	508	495	1626	838	68.5-83.3	Standard	Yes
Snow Blower 32x68	M7047*5757076	1765	WS 100	508	495	1626	838	68.5-83.3	Standard	Yes
Snow Blower 32x74	M7045*5653126	1918	WS 100	508	495	1626	838	68.5-83.3	Standard	Yes
Snow Blower 32x74	M7045*5653128	1880	WS 130	508	495	1626	838	83.6-106.0	Standard	Yes
Snow Blower 32x74	M7045*5653130	1880	WS 160	508	495	1626	838	106.4-117.3	High	Yes
Snow Blower 32x80	M7048*5757084	2032	WS 160	508	495	1626	838	106.4-117.3	High	Yes
Snow Blower 32X86	M7049*5653120	2210	WS 130	508	495	1626	838	83.6-106.0	Standard	Yes
Snow Blower 32X86	M7049*5653122	2184	WS 160	508	495	1626	838	106.4-117.3	High	Yes
Snow Blower 36x86	M7050*5653132	2223	OMV 315	610	610	1740	940	83.6-106.0	High & Super	Yes

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	c Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	H/991	Н/9/1	T770/H	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	N/077S	S/H/98S
	Snow Blower 26x48	M7053*5653112	χ¹								χ²											
	Snow Blower 32x60	M7046*5735371		Χ								Χ										
	Snow Blower 32x68	M7047*5757076			Χ							Χ	Χ	Χ	Χ	Χ						
	Snow Blower 32x74	M7045*5653126			Χ				Χ				Χ	Χ	Χ	Χ						Χ
1	Snow Blower 32x74	M7045*5653128						Χ	Χ									Χ	Χ		Χ	Χ
	Snow Blower 32x74	M7045*5653130			Χ*	Χ*	Χ*						Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Х*	Х*		
	Snow Blower 32x80	M7048*5757084			Χ*	Χ*	Χ*						Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*		
	Snow Blower 32X86	M7049*5653120					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
	Snow Blower 32X86	M7049*5653122					Χ*											Χ*	Χ*	Χ*		
	Snow Blower 36x86	M7050*5653132						Χ*	Χ*												Х*	Χ*

¹Machine requires drainline kit (PN 7126035 **)

²Machine needs to be equipped with SJC controls

COI	MPATIBILITY CHARTS																					
				Cor	npact	Track	c Load	lers						S	kid-S	teer L	oader	's				
	Description	Part Number	MT100	T450	Т590/Н	Т66/Н	H/9/1	Н/0//1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	S76/H	S770/H	S/H/98S
	Note: 7-Pin Attachment Control Kit is installed as star	ndard on High Fl	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	6733142									Χ											
2	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
4	7-Pin Attachment Control Kit **	7128426			Χ			Χ				Χ	Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Truck loading chute (32-36) **	7456370	73	2.5 h











ATTACHMENT: SNOW BLOWER

MAXIMUM COST-SAVING AND PRODUCTIVITY GUARANTEED WITH THESE NEW GENERATION SNOW BLOWERS

- ▶ These new snow blowers come with a rounded profile, so the snow is rolled rather than pushed, moving the snow further and more easily
- They are meant to handle heavy duty tasks thanks to their reinforced design with the larger auger and added aggressive teeth
- Cutouts on the back envelope provide better visibility on the cutting edge for the operator
- ▶ Longer product life with the new hydraulically gear-driven chute
- **▶** Clear snow off driveways, parking lots, and sidewalks with ease!

SNOW PUSHER





The open bottom and wide body deliver pure pushing power, for

Features & Benefits

maximum snow removal speed and efficiency
• Collect and push snow with ease and speed.

- Flotation and oscillation of the moldboard keep the snow pusher in contact with the ground without damaging equipment or property, allowing for snow removal over decorative and uneven surfaces.
- When removing snow on flat surfaces, or when clearing hard packed snow, the floatation feature can be locked into a rigid position.
- The cutting edge rear support provides added strength to the moldboard.
- Exterior gusseting reduces snow build up inside the boxed
- It is ideal for clearing packing lots, driveways and building sites.

Description: Push snow with speed and efficiency from parking lots, driveways and building sites using the Bobcat Snow Pusher attachment. Available in 2.44 m and 3 m widths size matched to your loader and job.

COMPATIBILITY CHARTS																					
			Cor	npact	Track	Load	ers						S	kid-S	teer L	oaders	S				
Description	Part Number	MT100	T450	Т590/Н	T66/H	H/9/1	H/0/LT	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	S66/H	S630/H	S650/H	S76/H	S770/H	S/H/98S
Snow Pusher, 239 cm	7113767		Χ	Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Snow Pusher, 305 cm	7116164			Χ	Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

B4501805-EN (01-25)

SNOW V-BLADE





Features & Benefits

- V-Blade: clear a path through deep snow.
 Straight Blade: pile large amounts of snow. Attachment **Control Kit**
 - Scoop Blade: scoop, push or pile snow.
 - 30° Left or Right Angle Blade: continuously push snow to either side of the loader.
 - Fingertip adjustments of V-blade's five configurations.
 Multi-position frame allows blade to be raised or lowered
 - to desired working height.
 - Domed, adjustable skid shoes and trip springs provide operator and component protection.
 - Optional rubber cutting edge kits available.

Description: This versatile, hydraulically operated attachment offers five different blade configurations to help operators move snow fast. The blade has on-the-go fingertip control and angles 30° right or left to continuously push snow to either side of the loader, straight or scoop configuration to push large amounts of snow, or v-configuration to plow through the deepest snow.



TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Working Width (Scoop Blade) (cm)	Working Width (Angled 30°) (cm)	Working Width (V-Blade) (cm)	Oscilla- tion (with Flotation Kit) ± (°)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Snow V-Blade, 152 cm	7104861	152	134	137	138	10	331	Yes	Standard	None
Snow V-Blade, 213 cm	6958577	213	188	190	190	10	385	Yes	Standard	None
Snow V-Blade, 244 cm	6958578	244	213	215	217	10	406	Yes	Standard	None
Snow V-Blade, 274 cm	6958579	274	241	241	244	10	425	Yes	Standard	None

CON	MPATIBILITY CHARTS																					
				Coi	mpaci	Track	c Load	lers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	N/077S	S/H/98S
	Snow V-Blade, 152 cm	7104861		Χ								Χ										
n	Snow V-Blade, 213 cm	6958577		Χ	Χ	Χ	Χ	Χ	Χ			Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Ч	Snow V-Blade, 244 cm	6958578			Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Snow V-Blade, 274 cm	6958579					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	ndard on High Fl	ow (H)	mach	ines.																	
	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
2	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

OPTIONS / ACCESSORIES	
Description	Part Number
Rubber Cutting Edge Kit, 152 cm (Includes hardware) **	6958664
Rubber Cutting Edge Kit, 183 cm (Includes hardware) **	6958665
Rubber Cutting Edge Kit, 213 cm (Includes hardware) **	6958666
Rubber Cutting Edge Kit, 244 cm (Includes hardware) **	6958667
Rubber Cutting Edge Kit, 274 cm (Includes hardware) **	6958668

** To be ordered through Bobcat Parts



SOD LAYER





- Automatic spindle-arm brakes to prevent unwanted
- Self-contained sod cutting blade.
- Built-in storage for sod staples.
- Compact sod after installation using the sod layer with optional sod roller.
 • Relief valve prevents "over squeezing" of sod rolls.

Features & Benefits

Sod Layer: No special requirement.

Description: Whether laying sod is a normal part of your day-to-day operation or just an occasional chore, the Bobcat sod layer attachment can make the job go quicker and more efficiently. The sod layer attachment can carry and lay a roll of sod up to 1219 mm wide, making it ideal for larger landscaping jobs. And because it mounts to the front of a Bobcat loader, it's manoeuvrable enough for those smaller jobs where space restrictions are a concern.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (cm)	Sod Roll Width (mm)	Arm Cylinders (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Sod Layer, 185 cm	6906783	185	609 - 1219	50 × 25 × 470	286	No	Standard	None

COMPATIBILITY CHARTS																					
			Coi	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0771	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	H/059S	Н/9/S	H/077S	S/H/98S
Sod Layer, 185 cm	6906783		Х	Х	Х	Х	Х	Х			Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ

SOIL & ASPHALT SPREADER



Description: The Bobcat Soil and Asphalt Spreader is engineered to lay asphalt and other material in order to create sidewalks, widen existing roads or fill trenches saving time and labor.

TECHNIC	CAL SPECIFICATIONS											
	Description	Part Number	Stan- dard Width (cm)	Optional Width (cm)	Asphalt Thick- ness (mm)	Trans- verse Tilt	Side Shift	Average Working Speed (m/min)	Operating Weight (kg)	Required Oil Flow	Oil Pressure	First Use Installa- tion Time
Soil and	Asphalt Spreader	7396290	190	196	0-100	5°	Hydr.	50 - 120	675	45 l/min	250 bar	None

COI	MPATIBILITY CHARTS																					
				Cor	npact	Track	Load	ers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	Н/0//1	T86/H/S	S70	\$100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
0	Soil and Asphalt Spreader	7396290		Х	Х	Х	Х	Х	Х			Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	idard on High Flo	ow (H)	mach	ines.																	
	7-Pin Attachment Control kit **	7229102		Χ								Χ										
2	7-Pin Attachment Control kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control kit **	7446894							Х													Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
External Side Wing Kit	7403712	40	15 min



COMPACT DESIGN

DESIGNED FOR MAXIMUM EFFICIENCY AND EASY TRANSPORT


- **▶** Floating transverse tilt
- ▶ Hydraulic side shift and adjustable side plates guarantees ease of operation and perfect finish
- ▶ Offset feature allows laying asphalt without the machine passing over the spread material
- ▶ Pair it with one of our Bobcat Light Compactors for the full asphalt solution package!

MORE INFO ON WWW.BOBCAT.COM

138 2025/2026 139 ** To be ordered through Bobcat Parts

SOIL CONDITIONER



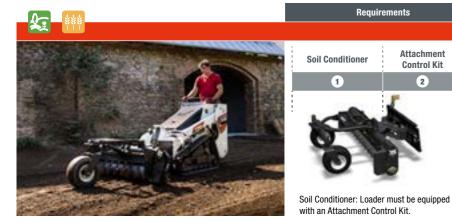

Features & Benefits

• Produces a perfect bed for seeding or laying grass turf. Attachment **Control Kit**

 Windrows and separates rocks and other debris.
 Impressively grades and levels topsoil with ease in floating or fixed mode per landscape requirement.

• Tears out old sod.

Pulverizes dirt clumps.
Forward and reverse raking action.

 Roller bar follows ground contours perfectly.
 Flip-up front bolster lets you get close to buildings and saves Direct-drive motor eliminates chain and sprocket problems.

• Attachable end plates for box-blade effect.



Description: A versatile, cost-effective landscaping attachment. It saves time and labour when smoothing ruts, moving material or levelling mounds. Produces a perfect bed for seeding and sodding.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Working Width (fully angled 25°)	Angling / Depth Adjust- ment	Number of Teeth	Tyres	Required Hydraulic Flow (I/min)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Soil Conditioner, 122 cm, Manual	6958310	122	116	Manual	81	Pneumatic	38 - 68	288	No	Standard	None
Soil Conditioner, 183 cm, Hydraulic	7135945	183	165	Hydraulic	121	Foam filled	49 - 140	567	Yes	Standard	None
Soil Conditioner, 183 cm, Hydraulic	7135944	183	165	Hydraulic	121	Foam filled	95 - 140	567	Yes	High Flow	None
Soil Conditioner, 214 cm, Hydraulic	7135946	214	193	Hydraulic	141	Foam filled	68 - 140	587	Yes	Standard	None
Soil Conditioner, 214 cm, Hydraulic	7135947	214	193	Hydraulic	141	Foam filled	113 - 140	587	Yes	High Flow	None

C	OMPATIBILITY CHARTS																					
				Coi	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Н/0651	Н/991	Н/9/1	H/0/11	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
	Soil Conditioner, 122 cm, Manual	6958310	Χ							Χ	Χ											
ı	Soil Conditioner, 183 cm, Hydraulic	7135945		Х	Χ	Χ	Χ	Х	Х*			Χ	Χ	Χ	Х	Χ	Χ	Х	Χ	Х	Χ	Х*
(Soil Conditioner, 183 cm, Hydraulic	7135944			X^{HF}	X^{HF}	X^{HF}	X^{HF}					X^{HF}									
ı	Soil Conditioner, 214 cm, Hydraulic	7135946			Χ	Χ	Χ	Χ	Χ*				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Х*
	Soil Conditioner, 214 cm, Hydraulic	7135947					X^{HF}	X^{HF}	X^{HF}									X^{HF}	X^{HF}	X^{HF}	X^{HF}	X^{HF}
	Note: 7-Pin Attachment Control Kit is installed as stand	dard on High Flo	ow (H)	mach	ines.																	
ı	7-Pin Attachment Control Kit **	6733142							Χ													
G	7-Pin Attachment Control Kit **	7229102		Χ								Χ										
ľ	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ

HF High Flow needed for operation * also compatible with High Flow



SONIC TRACER

Features & Benefits

• The Sonic Tracer Package system comprises: • 1 sonic tracer • 2 slope sensors

• Available as an option for the 244 cm and 274 cm HD graders.

Sonic Tracer: To be installed on 244 cm and 274 cm Graders with ACD. Loader must be equipped with the Deluxe panel.

Description: The tracer emits a sonic signal to maintain a set distance or elevation from an object, surface or the ground. Installed on the blade of the grader, the sonic tracer allows it to be used to grade, level and backfill on a multiple slope terrain, when following a string line, kerb stone or gutter or even on a previous pass for a grade control.

TECHNICAL SPECIFICATIONS							
Description	Part Number	Grade Accuracy (mm)	Detection Range (mm)	Display	Weight (kg)	Control Kit Required	First Use Installation Time
Sonic Tracer Package, Includes: 1 sonic tracer 1 rotation sensor 2 angle sensors	7023454	6.4	200 - 1300	Integrated multicolour grade display	20	No	None

CO	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	lers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	Н/0771	S/H/981	870	S100	S450	S510/H	S530/H	S550/H	H/065S	Н/998	H/0E9S	S650/H	Н/9/S	H/077S	S/H/98S
0	Sonic Tracer Package, Includes: •1 sonic tracer •1 rotation sensor •2 angle sensors	7023454				X	X	Х									X			X	X	
2	Mounting Hardware for Sonic Tracer	7211624				Χ	Χ	Χ									Χ			Χ	Χ	
3	Weld-on Bracket ¹ **	7211628				Χ	Χ	Χ									Х			Х	Х	



STUMP GRINDER





Requirements Features & Benefits

Attachment
Control Kit

The work group is mounted at an angle of 90° to the operator for excellent visibility to the cutting area, giving the operator the same wide view as a pull-behind stump grinder.

The wing cylinder design generates an impressive are

- The swing cylinder design generates an impressive arc. This allows the operator to cut large stumps without repositioning.
- Rubber deflector shields and screening provide additional operator comfort and protection from wood chips.
- The unique valve design controls the swing circuit speed to prevent the cutting wheel from stalling in the cut.
- Diverse cutting heights gives better access for a variety of size stumps.

Description: Grind tree stumps into mulch with the powerful action of the stump grinder attachment. Designed for maximum operating capability, the stump grinder mounts directly to the front of a carrier for easy manoeuvring in tight areas and positioning exactly where grinding action is needed. Mounted at a 90-degree angle to the operator, the stump grinder offers increased visibility to the cutting area, giving the operator the same wide view as with any pull-behind grinder. The stump grinder is the ideal attachment for landscaping contractors, homeowners with acreage, campus facilities, municipalities, and rental contractors. Stumps are eliminated even when used with machines equipped with high flow hydraulics.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Flow Range (I/min)	Cutting Height (mm)	Max. Cutting Depth (mm)	Max. Cutting Angle (°)	Grinder Reach at Ground Level (mm)	Number of Teeth	Weight (kg)	Control Kit Required	Working Flow	First Use Installa- tion Time
Stump Grinder, SG30	7100641	38 - 53	279	279	90	1175	16	171	Yes	Standard	None
Stump Grinder, SG60	6808034	64 - 121	806	381	80	1880	32	445	Yes	Standard/ High Flow	None
Stump Grinder, SGX60, High Flow	7112201	95 - 151	806	381	80	1880	32	451	Yes	High Flow	None

CO	MPATIBILITY CHARTS																					
				Coi	mpact	Tracl	c Load	ers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Н/0651	Н/991	Н/9/1	H/0//1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	N/9/S	N/077S	S/H/98S
	Stump Grinder, SG30	7100641	Χ							Χ												
0	Stump Grinder, SG60	6808034			Х	Х	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Stump Grinder, SGX60, High Flow	7112201			Χ*	Χ*	Χ*	Χ*	Χ				Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*	Χ*
	Note: 7-Pin Attachment Control Kit is installed as stan	dard on High Fl	ow (H)	mach	ines.																	
	14-Pin Attachment Control Kit **	7427838	Χ																			
2	14-Pin Attachment Control Kit **	7427916								Х												
	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
	7-Pin Attachment Control Kit **	7392835				Х	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ











ATTACHMENT: SWEEPER

WASTE NO TIME IN MANUAL CLEANUP WITH NEW GENERATION SWEEPERS

- These sweepers can be used in versatile applications, such as for removing debris on asphalt, cleaning of pathways, and sweeping animal sheds
- ▶ Bobcat is bringing your sweepers with a patented height adjustment system for wear compensation
- New heavy-duty bristles and added side protection for a more robust product
- ▶ For better results, add an optional gutter brush, water tank and nozzle spray kit
- Sweepers compatible and interchangeable between multiple carriers

MORE INFO ON WWW.BOBCAT.COM

* High flow machines only

** To be ordered through Bobcat Parts

COMPACT LOADERS

B4501805-EN (01-25)

SWEEPER





Features & Benefits

• Cleans in forward or reverse.

- Wear compensation for increased bristle life by patented height adjustment system.
 Reversible cutting edge and side protection as standard ensures long product life.

- ensures long product life.

 Standard cutting edge of the sweeper can be used to scrape packed material.

 Motor drain line except SW110.

 Equipped with new heavy duty bristles.

 Optional steel and polyurethane mix bristles.

 Optional gutter brush can be installed to increase versatility and increase, excepting width increase sweeping width.

 • An optional water tank can be fitted on top of the sweeper.

 • Spray kit also compatible with existing loaders Water kit.

Sweeper: No special requirement.

Description: The Bobcat sweeper can sweep and collect dirt or other debris in both forward and reverse. This attachment is perfect for cleaning parking lots, sidewalks, docks, and warehouses. New features like patented height adjustment placed on the top of the sweeper, double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Max. Flow Range (I/min)	Weight (kg)	Control Kit Required
Sweeper, 110 cm	7439853	110	0.20	550	PP *	25	30 - 60	258	No
Sweeper, 110 cm - Steel/PP*	7439853.SP	110	0.20	550	Steel/PP *	25	30 - 60	258	No
Sweeper, 140 cm	7439854	140	0.33	550	PP *	32	60 - 115	381	No
Sweeper, 140 cm - Steel/PP*	7439854.SP	140	0.33	550	Steel/PP *	32	60 - 115	381	No
Sweeper, 155 cm	7439855	155	0.37	550	PP *	36	60 - 115	407	No
Sweeper, 155 cm - Steel/PP*	7439855.SP	155	0.37	550	Steel/PP *	36	60 - 115	407	No
Sweeper, 185 cm	7439856	185	0.45	550	PP *	43	60 - 115	467	No
Sweeper, 185 cm - Steel/PP*	7439856.SP	185	0.45	550	Steel/PP *	43	60 - 115	467	No
Sweeper, 215 cm	7439857	215	0.52	550	PP *	48	60 - 115	527	No
Sweeper, 215 cm - Steel/PP*	7439857.SP	215	0.52	550	Steel/PP *	48	60 - 115	527	No

^{*} Polypropylene

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers		Skid-Steer Loaders												
Description	Part Number	MT100	T450	Т590/Н	T66/H	Н/9/1	H/0/LT	Z/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Sweeper, 110 cm	7439853	Χ							Χ												
Sweeper, 110 cm - Steel/PP	7439853.SP	Χ							Χ												
Sweeper, 140 cm	7439854		Χ							Χ	Χ										
Sweeper, 140 cm - Steel/PP	7439854.SP		Χ							Χ	Χ										
Sweeper, 155 cm	7439855		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ					
Sweeper, 155 cm - Steel/PP	7439855.SP		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ					
Sweeper, 185 cm	7439856		Χ	Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Sweeper, 185 cm - Steel/PP	7439856.SP		Χ	Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Sweeper, 215 cm	7439857			Χ	Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Sweeper, 215 cm - Steel/PP	7439857.SP			Χ	Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Gutter Brush Right Side (for Sweepers 140 - 215 cm)	7440928	50	15 min
Gutter Brush Left Side (for Sweepers 140 - 215 cm)	7441403	50	15 min
Water Tank Kit, 100 I (for Sweepers 140 - 215 cm) *	7440927	40	15 min
Nozzle Spray Kit (for Sweepers 140 - 215 cm)	7440926	3	10 min
Gutter Brush Hose Extension Kit (for Sweepers 185 - 215 cm)	7446067	1	5 min
Bumper Kit ¹	7532872	1.6	1 h

^{*} Water Tank Kit 7440927 includes Nozzle Spray Kit 7440926.

¹ Highly recommended for operation with the Sweeper 155 on 400 series

	Sweeper 140 cm	Sweeper 155 cm	Sweeper 185 cm	Sweeper 215 cm	N
Description	7439854	7439855	7439856	7439857	Pictures
	7439854.SP	7439855.SP	7439856.SP	7439857.SP	
Gutter Brush Right Side	7440928	7440928	7440928	7440928	
Gutter Brush Left Side	7441403	7441403	7441403	7441403	W. W. W.
Water Tank Kit	7440927	7440927	7440927	7440927	
Nozzle Spray Kit	7440926	7440926	7440926	7440926	S Bobcat
Gutter Brush Hose Extension Kit for sweepers 185 cm and 215 cm)			7446067	7446067	



THE BUMBER KIT IS HIGHLY RECOMMENDED FOR OPERATION WITH THE **SWEEPER 155 ON 400 SERIES**

144

SWEEPER, HD OPEN FRAME



- Cleans in forward or reverse
- Heavy duty polyurethane bristles guarantee long product life

Features & Benefits

- Standard cutting edge of the sweeper can be used to scrape packed material
- Cutting edge and side protection as standard ensures long
- product life
 Wear compensation for increased bristle life by height adjustment system
- Well protected hydraulic motor with pressure relief valve
 Optional gutter brush can be installed to increase versatility and increase sweeping width
- An optional water tank can be fitted on top of the sweeper
 Spray kit compatible with existing loaders' water kit

Sweeper: No special requirement.

Description: The Bobcat open design sweeper can sweep and collect dirt or other debris in heavy duty applications. The brush is mounted in front of the collection bucket, allowing cleaning in tight industrial places, while guaranteeing the best weight distribution. Vertically angling the sweeper and reversing the flow can be used for material removal without collection in the bucket. This attachment is perfect for cleaning up asphalt and farm grindings. Double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required
HD Open Frame Sweeper, 150 cm	7457917	150	0.163	600	PP *	34 / 32	30 - 50	491	No
HD Open Frame Sweeper, 180 cm	7457918	180	0.195	600	PP *	42 / 39	30 - 50	546	No

^{*} Polypropylene

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						٤	kid-S	teer L	.oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0/LL	T86/H/S	870	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
HD Open Frame Sweeper, 150 cm	7457917		Х	Х	Х						X ²	Х	Х	Х	Х	Х					
HD Open Frame Sweeper, 180 cm	7457918		X ²	Χ	Χ	Χ	Χ	Χ				X ¹	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

** To be ordered through Bobcat Parts

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Water Tank Kit 100 I	7468765	33	30 min
Nozzle Spray Kit for HD Open Frame Sweeper 150 cm	7461923	18	15 min
Nozzle Spray Kit for HD Open Frame Sweeper 180 cm	7461924	20	15 min
Gutter Brush Right Side for HD Open Frame Sweeper 150 cm	7461925	30	30 min
Gutter Brush Right Side for HD Open Frame Sweeper 180 cm	7465814	30	30 min
Gutter Brush Left Side for HD Open Frame Sweeper	7461926	30	30 min

OPTIONS / ACCESSORIES COMPATIBILITY			
Description	Sweeper 150 cm	Sweeper 180 cm	Pictures
	7457917	7457918	
Water Tank Kit 100L	7468765	7468765	
Nozzle Spray Kit	7461923	7461924	₩ Bubcat
Gutter Brush Right Side	7461925	7465814	
Gutter Brush Left Side	7461926	7461926	

** To be ordered through Bobcat Parts




THE BEST SWEEP PERFORMANCE IS ACHIEVED WITH THE SWEEPER WIDER THAN THE CARRIER, AND AT **6 KM/H TRAVEL SPEED**

2025/2026 147

¹ Operation approved without additional sweeper options

² Water tank not approved for application

SWEEPER, MULTIPURPOSE

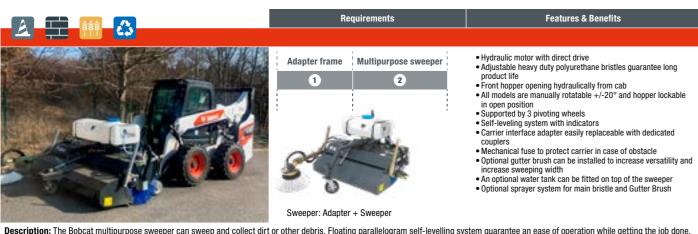

Description: The Bobcat multipurpose sweeper can sweep and collect dirt or other debris. Floating parallelogram self-levelling system guarantee an ease of operation while getting the job done. Angling the sweeper and reversing the flow allows for material removal without collection in the hopper. Multiple interface adapter makes it easily interchangeable between Bobcat carriers. This attachment is perfect for cleaning parking lots, roads, docks, and warehouses.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (straight/ angled) (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required
Multipurpose Sweeper, 135 cm	7457925	135 / 127	0.09	600	PP *	25 + 2	40 - 50	363	No
Multipurpose Sweeper, 150 cm	7457926	150 / 141	0.11	600	PP *	28 + 2	40 - 50	385	No
Multipurpose Sweeper, 180 cm	7457927	180 / 169	0.13	600	PP *	34 + 2	40 - 50	432	No
Multipurpose Sweeper, 200 cm	7457928	200 / 188	0.16	600	PP *	35 + 2	40 - 50	625	No
Multipurpose Sweeper, 230 cm	7457929	230 / 216	0.19	600	PP *	44 + 2	40 - 50	660	No

^{*} Polypropylene

COI	MPATIBILITY CHARTS																					
				Cor	npact	Track	c Load	lers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	T590/H	Н/991	H/9/1	H/0771	T86/H/S	S70	\$100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Adapter Frame BT for multipurpose sweeper 135 cm - 180 cm	7467998		Х	Х	Х	Х	Х					Х	Х	Х	Х	Х	Х	Х	Х	Х	
1	Adapter Frame BT for multipurpose sweeper 200 cm - 230 cm	7468000				Х	Х	Х	Х									Х	Х	Х	Х	Х
	Multipurpose Sweeper, 135 cm	7457925		Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ					
	Multipurpose Sweeper, 150 cm	7457926		Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ					
2	Multipurpose Sweeper, 180 cm	7457927		X^1	Χ	Χ	Χ	Χ					X ¹	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
	Multipurpose Sweeper, 200 cm	7457928				Х	Х	Х	Х									X ¹	X^1	Χ	Χ	Χ
	Multipurpose Sweeper, 230 cm	7457929				Χ	Χ	Χ	Х									X ¹	X ¹	Χ	Χ	Χ

¹Water tank not approved for application

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Water Tank Kit 100 I	7461922	33	30 min
Water Tank Kit 200 I	7460142	48	30 min
Nozzle Spray Kit for Multipurpose Sweeper 135 cm	7464778	6.5	15 min
Nozzle Spray Kit for Multipurpose Sweeper 150 cm	7464779	7	15 min
Nozzle Spray Kit for Multipurpose Sweeper 180 cm	7464780	8.5	15 min
Nozzle Spray Kit for Multipurpose Sweeper 200 cm	7464781	9	15 min
Nozzle Spray Kit for Multipurpose Sweeper 230 cm	7464782	10	15 min
Gutter Brush Right Side for Multipurpose Sweepers 135 cm - 180 cm	7468288	40	30 min
Gutter Brush Left Side for Multipurpose Sweepers 135 cm - 180 cm	7468289	40	30 min
Gutter Brush Right Side for Multipurpose Sweepers 200 cm - 230 cm	7468291	40	30 min
Gutter Brush Left Side for Multipurpose Sweepers 200 cm - 230 cm	7468292	40	30 min



THE BEST SWEEP PERFORMANCE IS ACHIEVED WITH THE SWEEPER WIDER THAN THE CARRIER, AND AT 6 KM/H TRAVEL SPEED

Description	Sweeper 135 cm	Sweeper 150 cm	Sweeper 180 cm	Sweeper 200 cm	Sweeper 230 cm	Pictures
	7457925	7457926	7457927	7457928	7457929	
ater Tank Kit 100L	7461922	7461922	7461922	7461922	7461922	(*
ater Tank Kit 200L				7460142	7460142	
ozzle Spray Kit	7464778	7464779	7464780	7464781	7464782	The
ter Brush Right Side	7468288	7468288	7468288	7468291	7468291	
tter Brush Left Side	7468289	7468289	7468289	7468292	7468292	



FOR BETTER PERFORMANCE, LONG BRISTLE LIFE, AND LOW FUEL CONSUMPTION, SEE THE OPERATOR'S MANUAL FOR **RECOMMENDED SETTINGS**

TILLER





Features & Benefits

- Bidirectional rotation allows both top-cutting and undercutting in either travel direction.
- Offset mounting permits tilling next to sidewalks, curbs and buildings.
- Hydraulically powered; no shear pins to maintain.
 Able to use high-flow hydraulics for enhanced performance on 158 cm and 193 cm models.
- Hardened, double-edge, replaceable tines.
- Exclusive Bob-Tach™ mounting system permits quick
- Forward/reverse travel direction.

Tiller: No special requirement.

Description: A great landscaping attachment. It quickly breaks up the ground and mixes compost and other materials into the soil. Offset mounting permits tilling next to sidewalks, curbs and buildings.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Digging Depth (cm)	Required Hydraulic Flow (I/min)	Number of Tines	Travel Direction	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Tiller, 102 cm	7196028	102	10.2	34 - 68	32	Forward/ Reverse	230	No	Standard	None
Tiller, 158 cm	7104371	158	15.2	64 - 140	36	Forward/ Reverse	321	No	Standard / High Flow	None
Tiller, 193 cm	7102125	193	15.2	64 - 140	44	Forward/ Reverse	361	No	Standard / High Flow	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Tiller, 102 cm	7196028	Х							Х	Х											
Tiller, 158 cm	7104371		Х	Χ		Χ					Χ	Χ	Χ	Χ	Χ		Χ	Χ	Χ	Χ	Χ
Tiller, 193 cm	7102125			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES	
Description	Part Number
Bottom Skid **	7280548

** To be ordered through Bobcat Parts



FOR SMOOTH OPERATION, THE TINE ROTATION SHOULD BE IN THE OPPOSITE **DIRECTION OF LOADER TRAVEL**



TILT-TATCH™





 Connects as an interface between the Bob-Tach™ and attachment.

- Rotates right or left 15° from centre.
- Hydraulically controlled from loader seat.
- Keeps load level on uneven terrain.
- Cuts level path out of sidehill.
 Digs drainage ditches with the corner of the bucket.

Features & Benefits

Note: Use of Tilt-Tatch™ will reduce operating capacity and tip load by approximately 20%. See the Tilt-Tatch™ Operators Manual for New Load Ratings. Also, please do note that Tilt-Tatch™ can be used with non-hydraulic attachments

Description: Tilt-Tatch™ increases the versatility of Bobcat buckets, pallet forks and other attachments. This hydraulic tool can rotate an attachment 15° from centre to the right or left. Use it to keep loads level on sloping terrain or make a level cut on a hillside. You can even dig drainage ditches with the corner of the bucket.

Tilt-Tatch™: No special requirement.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (cm)	Oscillation ± (°)	Cylinder	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Tilt-Tatch [™] • Interface between the Loader's Bob-Tach [™] and non hydraulic attachments.	7101600	122	15	1	145	No	Standard	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						٤	Skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	H/0771	Z/H/981	S70	\$100	8450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Tilt-Tatch™	7101600		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		

150 2025/2026 151 COMPACT LOADERS

TREE TRANSPLANTER, CONVERTIBLE



COMPATIBILITY CHARTS



Stabiliser | Attach-Mounting | Stabilizers | ment Con-Kit | trol Kit |

3 4 5

(Including Mounting Kit). Loader must be equipped with a 7-Pin Control Kit. Must also order Pendant Control OR ACD Overlapping blades ensure clean root cutting and support of the root ball.
The blade has an angle of 25°. They offering a larger tree ball

- for better root protection.

 3 models are available to best fit your machine and tree
- transplant requirements.

 Swing-open gate with open frame design for easy tree access
- All-electric control from operator's seat for great comfort
 Note: Tree Transplanters can be equipped with either a pendant-style (rocker switch) control panel or a 7-pin ACD control kit. Tree Transplanters with pendant control can be installed on all loader series; tree transplanters with 7-pin ACD control must be installed on G-Series and more recent loaders. You must order a pendant control kit or 7-pin ACD conversion

Description: Turn your loader into a tree harvesting unit with this rugged, dependable, attachment that is simple to operate and easy to manoeuvre. You can dig, transplant or package a tree without having to leave the comfort of your seat. The overlapping blades ensure clean root cutting and support of the root ball.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Number of Spade	Tree Diameter (mm)	Ball Diameter (mm)	Ball Weight (kg)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time	Туре
Tree Transplanter, Convertible, 81 cm, Modified	7149442	3	50 - 80	650 - 800	115 - 260	692	Yes	Standard	None	Modified
Tree Transplanter, Convertible, 91 cm, Modified	7149445	3	50 - 90	700 - 900	175 - 365	717	Yes	Standard	None	25°
Tree Transplanter, Convertible, 111 cm, Modified	7149306	4	75 - 110	900 - 1100	260 - 530	973	Yes	Standard	None	Most popular in the industry.

				Cor	npact	Track	(Load	ers						s	kid-S	teer L	oader	s				
	Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0//1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	N/9/S	S770/H	S/H/98S
	Tree Transplanter, Convertible, 81 cm, Cone	7149485			Χ	Х	Х	Х	Х				Х	Х	Х	Χ	Х	Х	Х	Х	Х	Χ
	Tree Transplanter, Convertible, 91 cm, Cone	7149488					Χ	Χ	Χ								Χ	Χ	Χ	Χ	Χ	Χ
1	Tree Transplanter, Convertible, 111 cm, Cone	7149491					Χ	Χ	Χ												Χ	Χ
ľ	Tree Transplanter, Convertible, 81 cm, Modified	7149442			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Tree Transplanter, Convertible, 91 cm, Modified	7149445					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ
	Tree Transplanter, Convertible, 111 cm, Modified	7149306					Х	Х	Х												Х	X
	Rear Stabilizers Mounting Kit	7152508			Χ								Χ	Χ	Χ	Χ		Χ	Χ			
(2	Rear Stabilizers Mounting Kit	7152512						Χ													Χ	
•	Rear Stabilizers Mounting Kit **	7415849				Χ											Χ					
	Rear Stabilizers Mounting Kit **	7453977							Х													X
3	Rear Stabilizers	6811449 **			Χ	Χ	Χ	Χ	Χ				Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Note: 7-Pin Attachment Control Kit is installed as star	dard on High Flo	ow (H)	mach	ines.																	
4	7-Pin Attachment Control Kit **	7128426			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
,	7-Pin Attachment Control Kit **	7392835				Χ	Χ										Χ			Χ		
	7-Pin Attachment Control Kit **	7446894							Χ													Χ
	7-PIN ACD Conversion Kit	7152662			Χ			Χ					Χ	Χ	Χ	Χ		Χ	Χ		Χ	
5	Pendant Control Kit, 3-Blade •For 81 cm and 91 cm Convertible Tree Transplanters •No additional Control Kits needed	7152663			Х			х					Х	X	Х	Х		X	X		х	
	Pendant Control Kit, 4-Blade •For 111 cm Convertible Tree Transplanters •No additional Control Kits needed	7152664						Χ										Х	Χ		Χ	



DON'T FORGET TO ORDER 7-PIN ACD **CONVERSION KIT FOR SJC CONTROLS**

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
Counterweight Kit, 137 kg **	6811455	137
Rear Auxiliary Line Kit 500 series **	7229294	35
Rear Auxiliary Line Kit 600 series **	7231436	45
Rear Auxiliary Line Kit 700 series **	7220912	55
Rear Auxiliary Line Kit S66/T66 **	7422032	35
Rear Auxiliary Line Kit S76/T76 **	7307980	35
Rear Auxiliary Line Kit S86/T86 **	7214605	66



2025/2026 153 ** To be ordered through Bobcat Parts ** To be ordered through Bobcat Parts

TRENCHER





Requirements	Performance*	Features & Benefits
--------------	--------------	---------------------

• Speed: Up to 90m/hour

*Performances are estimated only and can vary depending on the type of soil, depth of use, operator experience, ...

- Designed and built specifically for Bobcat loaders.
 Hydraulic sideshift capability to trench close to buildings, fences or other objects.
- Get even closer by removing the auger.
 Changing to a trencher attachment is quick and easy with the Bob-Tach™ mounting system.

Description: This versatile tool can be used for a variety of jobs ranging from light to high-production trenching. Digging depths range from 60 cm to 1.5 m. The sideshift feature lets you get close to walls or fences.

TECHNICAL SPECIFICATIONS													
Description	Part Number	Dig- ging Depth * (mm)	Trench Width (mm)	Boom Length (mm)	Working Speed (m/h)	Required Hydraulic Flow (I/min)	Sideshift (mm)	Sideshift System (as stan- dard)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time	
Trencher, LT112 w/ Chain Complete	M7011*1499981	600	101 - 203	1000	± 250 - 500	34 -57	409	Manual	278	No	Standard	None	
Trencher, LT113 w/ Chain Complete	M7014*1508970	900	101 - 203	1334	± 250 - 500	34 -57	409	Manual	289	No	Standard	None	
Trencher, LT313 w/ Chain Complete	M7015*1499002	1200	152 - 305	1664	± 250 - 500	57 - 83	587	Manual	444	No	Standard	None	
Trencher, LT414 w/ Chain Complete	M7016*1535020	1575	152 - 203	2011	± 250 - 500	98 - 151	554	Hydraulic	552	No	High Flow	None	

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						5	Skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Н/0651	H/991	H/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	S76/H	S770/H	S/H/98S
Trencher, LT112 w/ Chain Complete	M7011*1499981	Х							Χ												
Trencher, LT113 w/ Chain Complete	M7014*1508970	Χ							Χ												
Trencher, LT313 w/ Chain Complete	M7015*1499002		Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		
Trencher, LT414 w/ Chain Complete	M7016*1535020			X ^{HF1}	X^{HF1}	X^{HF}	X^{HF}	X^{HF}						X ^{HF1}	X ^{HF1}	X^{HF}	X^{HF}	X^{HF}	X^{HF}	X^{HF}	X^{HF}

¹ Depth limitation of 1220 mm



*PERFORMANCES ARE ESTIMATED ONLY AND CAN VARY DEPENDING ON THE TYPE OF SOIL, DEPTH AND WIDTH OF USE, OPERATOR EXPERIENCE, ...

OPTIONS / ACCESSORIES

Description	Part Number
Cup Tooth Kit, LT112, LT113, LT213 **	6701918
Carbide Tooth Kit, LT112, LT113, LT213 **	6705531
Spacer Kit, 15 cm, LT112, LT113, LT213 (Used with cup teeth for 15 cm width) **	7110909
Spacer Kit, 20 cm, LT112, LT113, LT213 (Used with cup teeth for 20 cm width) **	7110910
Trench Cleaner Adapter, 15 cm, LT112, LT113, LT213 **	6806974
Trench Cleaner Adapter, 20 cm, LT112, LT113, LT213 **	6806975
Cup Tooth Kit, LT313, LT414 **	6807925
Carbide Teeth Kit, LT313, LT414 **	6809387
Spacer Kit, 20 cm, LT313, LT414 (Used with Cup Teeth for 20 cm width) **	7110911
Spacer Kit, 25 cm, LT313, LT414 (Used with Cup Teeth for 25 cm width) **	7110912
Spacer Kit, 30 cm, LT313 (Used with Cup/Carbide Teeth for 30 cm width) **	7110913
Spacer Kit, 20 cm, LT313 (Used with Cup/Carbide Teeth for 20 cm width) **	6809324
Trench Cleaner Adapter, 20 cm, LT313, LT414 **	6806975
Trench Cleaner Adapter, 25 cm, LT313, LT414 **	6806976
Trench Cleaner Adapter, 30 cm, LT313, LT414 **	6806977
Cup Tooth Kit, LT405 **	6705668
Carbide Tooth Kit, LT405, Side Mount **	6705670
Spacer Kit, LT405 **	6705669
Trench Cleaner Adapter, 20 cm, LT405 **	6573592
Trench Cleaner Adapter, 30 cm, LT405 **	6573589

Cup Teeth Patterns



Spacer Kits *
Widens the chain up to 30 cm.

* **IMPORTANT:** When installing spacer kits, a trench cleaner adapter must also be installed.



2025/2026 **155** HFHigh flow machines only ** To be ordered through Bobcat Parts

UTILITY FORK

UTILITY FRAME





 Bob-Tach™ Attachment Mounting System: Makes easy work of attaching and detaching the utility fork. Fast and easy mounting means spending less time on attachment changes and more time on the job.

Features & Benefits

Replaceable Teeth: For easy attachment maintenance, utility fork teeth are replaceable, keeping the attachment working smoothly and maximizing time spent getting work done. Provisions for adding additional forks to narrow the space between fork tines.

Utility Fork: No special requirement.


Description: Handle materials easier and move materials faster with the utility fork attachment. The strong, replaceable, tapered teeth handle a variety of farm and ranch chores easily and efficiently.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (mm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Instal- Iation Time
Utility Fork, 91 cm, 5 Teeth	6966230.EA	905	1080	5	9	208 / 104	874	100	No	Standard	2.5 h
Utility Fork, 122 cm, 6 Teeth	6966232.EA	1227	1080	6	11	208 / 104	874	123	No	Standard	2.5 h
Utility Fork, 137 cm, 7 Teeth	6966227.EA	1370	1080	7	13	208 / 104	874	137	No	Standard	2.5 h
Utility Fork, 152 cm, 8 Teeth	6966229.EA	1522	1196	8	15	208 / 104	1006	145	No	Standard	2.5 h
Utility Fork, 168 cm, 9 Teeth	6966231.EA	1680	1196	9	17	208 / 104	1006	151	No	Standard	2.5 h
Utility Fork, 183 cm, 10 Teeth	6966228.EA	1830	1196	10	19	208 / 104	1006	171	No	Standard	2.5 h
Utility Fork, 203 cm, 11 Teeth	7107243.EA	2030	1196	11	21	208 / 104	1006	176	No	Standard	2.5 h

COMPATIBILITY CHARTS																					
			Coi	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	T770/H/S	Т86/Н	S70	S100	S450	S510/H	S530/H	S550/H	Н/065S	Н/99S	S630/H	S650/H	Н/9/S	H/077S	S/H/98S
Utility Fork, 91 cm, 5 Teeth	6966230.EA	Х							Х												
Utility Fork, 122 cm, 6 Teeth	6966232.EA									Χ	Χ										
Utility Fork, 137 cm, 7 Teeth	6966227.EA		Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ						
Utility Fork, 152 cm, 8 Teeth	6966229.EA		Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ		Χ	Χ	Χ		
Utility Fork, 168 cm, 9 Teeth	6966231.EA		Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		
Utility Fork, 183 cm, 10 Teeth	6966228.EA		Χ	Χ	Χ	Χ						Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Utility Fork, 203 cm, 11 Teeth	7107243.EA		Χ	Χ	Χ	Χ	Χ	Χ					Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ

OPTIONS / ACCESSORIES			
Description	Part Number	Farm / Utili	ity Grapple
		6966687:EA	7176977
Utility Fork, 91 cm, 5 Teeth	6966230.EA	Χ	
Utility Fork, 122 cm, 6 Teeth	6966232.EA	Χ	
Utility Fork, 137 cm, 7 Teeth	6966227.EA	Χ	
Utility Fork, 152 cm, 8 Teeth	6966229.EA		Χ
Utility Fork, 168 cm, 9 Teeth	6966231.EA		Χ
Utility Fork, 183 cm, 10 Teeth	6966228.EA		Χ
Utility Fork, 203 cm, 11 Teeth	7107243.EA		Χ



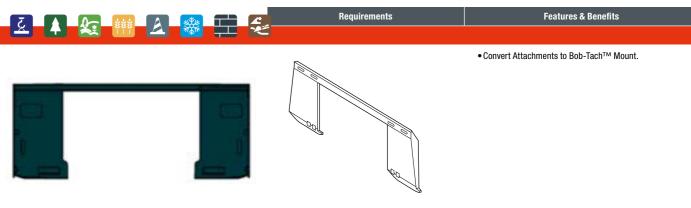

Utility Frame: No special requirement.

 $\textbf{Description:} \ \textbf{Weld this accessory to non-Bobcat attachments to convert to Bob-Tach^{\text{TM}} \ mount.$

TECHNICAL SPECIFICATIONS				
Description	Part Number	Weight (kg)	Control Kit Required	First Use Installation Time
Utility Frame, Heavy Duty	6731112 **	29	No	None
Utility Frame, Standard Duty	6731114 **	21	No	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	skid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	Н/991	H/9/1	H/0/71	S/H/981	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
Utility Frame, Heavy Duty	6731112 **					Χ	Χ										Х	Х	X	Х	
Utility Frame, Standard Duty	6731114 **		Х	Χ	Χ			Χ		Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		Χ

56 2025/2026 **157**** To be ordered through Bobcat Parts

VIBRATORY ROLLER





Features & Benefits

- Free drum oscillation keeps more of the drum in contact with the surface on uneven terrain.
- Offset drum design allows the right side of the roller to extend past the machine. This is very useful when compacting next to sidewalks, walls, or curbs.
- Durable one-piece drum for extra strength. Dual-direction vibration motor permits compaction
- travelling in either direction. • Rubber isolation mounts on the roller reduce vibration transfer to the loader and operator.
- Both smooth and padded drums are available.

Vibratory Roller: No special requirement.

Description: The ideal compacting tool for flatwork, trenches and asphalt patching jobs. Compacts while moving forward or in reverse. Offset drum design lets you get right next to sidewalks, walls or curbs. Drum oscillation keeps the roller in contact with the surface on uneven terrain.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Work- ing Width (mm)	Wheel Diameter (mm)	Num- ber of Pads	Oscilla- tion ± (°)	Dynamic Force (kN) @ (I/min)	Frequency (vpm) @ (I/min)	Ampli- tude (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Instal- Iation Time
Vibratory Roller, 122 cm, Smooth Drum	7165404	1219	660	0	12	63.4 @ 75	2879 @ 75	12.7	811	No	Standard	None
Vibratory Roller, 185 cm, Smooth Drum	7165402	1854	660	0	7.5	63.5 @ 90	2882 @ 90	12.7	1002	No	Standard	None
Vibratory Roller, 203 cm, Smooth Drum	7165400	2032	660	0	7.5	63.5 @ 90	2882 @ 90	12.7	1052	No	Standard	None

COMPATIBILITY CHARTS																					
			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	Т590/Н	H/991	H/9/1	H/0/L1	T86/H/S	S70	S100	8450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Vibratory Roller, 122 cm, Smooth Drum	7165404		Χ	Χ	Х						Χ	Χ	Χ	Х	Χ	Χ					
Vibratory Roller, 185 cm, Smooth Drum	7165402			Χ	Χ	Χ	Χ	Χ							Χ	Χ	Χ	Χ	Χ	Х	Χ
Vibratory Roller, 203 cm, Smooth Drum	7165400					Χ	Χ	Χ									Χ	Χ	Χ	Χ	Χ






WATER KIT



the uprights. Electric pump supplies water to nozzles on the attachment.

Mounting Kit | Water Kit | Nozzle Kit

 Quick-Tach hose couplings allow fast hook-up (Quick-Tach) version).



• High-capacity tanks minimise refilling.

• Pump "on-off" switch conveniently located in cab.

Features & Benefits

Easy connections.



and Nozzle Kit. Description: When using attachments such as a vibratory roller, angle broom or sweeper, add the water kit to help reduce dust. The water kit for loaders includes two 53 litres tanks that mount on

TECHNICAL SPECIFICATIONS Tank Max. Flow Rate / Nozzle Shippin Weight (kg) First Use **Working Flow** Description Time Water Kit 6813816 2×53 215 4 h 1.06 75 Standard Water Kit 7434036 2×53 1.06 215 75 4 h Standard

Water Kit: Need Mounting Kit, Water Kit

CON	MPATIBILITY CHARTS																					
				Cor	npact	Track	(Load	lers						s	kid-S	teer L	.oadei	's				
	Description	Part Number	MT100	T450	H/0651	H/991	H/9/1	H/0/4T	S/H/981	870	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	S770/H	S/H/98S
	Rear Stabilizers Mounting Kit	7152508		Χ	Х								Х	Х	Х	Х		Х	Х			
	Rear Stabilizers Mounting Kit	7152512						Χ													Χ	
0	Rear Stabilizers Mounting Kit **	7407689					Χ													Χ		
	Rear Stabilizers Mounting Kit **	7415849				Χ											Χ					
	Rear Stabilizers Mounting Kit **	7453977							Χ													Χ
2	Water Kit **	6813816		Χ	Χ			Χ					Χ	Χ	Χ	Х		Χ	Χ		Χ	
4	Water Kit **	7434036				Χ	Χ		Χ								Χ			Χ		Χ
	Nozzle Kit (Includes 4 Nozzles) **	7113709		Χ	Χ	Χ	Х	Χ			Х	Χ	Χ	Χ	Χ	Х	Χ	Χ	Χ	Χ	Х	
	Nozzle Kit for Self-levelling Planer 45 cm only (Includes 2 nozzles)	7240656			Χ									Χ	Х	Х		Х	Х			
3	Nozzle Kit for Self-levelling Planer 50 & 60 cm only (Includes 3 nozzles)	7240658			Χ	Χ	Х	Х	Χ					Х	Х	Х	Х	Х	Х	Х	Χ	Χ
	Nozzle Kit for Self-levelling Planer 100 cm only (Includes 4 Nozzles)	7113092				Χ	Х	Χ	Χ								Χ	Χ	Χ	Χ	Χ	Χ

** To be ordered through Bobcat Parts

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
PSL 120 cm, Kit Nozzle Spray	7331110	6
Kit Nozzle Spray WS18/24	7339486	5
Kit Nozzle Spray WS32	7342576	5
Kit Nozzle Spray WSSL20	7336179	6



WORKS GREAT WITH VIBRATORY ROLLERS,

2025/2026 **159**

WHEEL SAW





equirements Performance* Features & Benefits

 Speed: 0,5 to 5 m/min

* Performances are estimated only and can vary depending on the type of soil, depth of use, operator experience, ... Powerful cutting in asphalt, concrete and rock. Cuts clean and precise without damaging the edges of the trench.
 A hydraulically controlled trench cleaner, for

cleaner trenches every time (not for WS32).

 More precise cutting action than air or hydraulic hammers can provide.

Easier to transport than dedicated machines.
 Hydraulic sideshift.



Wheel Saw: For High Flow (H) machines

Description: This rugged, powerful saw cuts through asphalt, concrete, frozen ground or wire mesh with more precision than air or hydraulic breakers. Use it for road repair and for laying water, gas, electric and fibre-optic cables. The trench cleaner raises and lowers hydraulically. Depending on model, cutting depth ranges from 15 cm to 80 cm.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Working Width (mm)	Working Depth * (mm)	Trench Cleaner	Number of Bits	Wheel Rotation @ 113 l/min (rpm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
WS18 Wheelsaw, 5 cm, Wheel & Trench Cleaner	6729537*WSG	50	150 - 450	Yes	64	80	1097	Yes	High Flow	None
WS18 Wheelsaw, 8 cm, Wheel & Trench Cleaner	6729537*WSA	80	150 - 450	Yes	64	80	1095	Yes	High Flow	None
WS18 Wheelsaw, 10 cm, Wheel & Trench Cleaner	6729537*WSF	100	150 - 450	Yes	56	80	1027	Yes	High Flow	None
WS18 Wheelsaw, 13 cm, Wheel & Trench Cleaner	6729537*WSB	130	150 - 450	Yes	56	80	1040	Yes	High Flow	None
WS18 Wheelsaw, 16 cm, Wheel & Trench Cleaner	6729537*WSC	160	150 - 450	Yes	56	80	1053	Yes	High Flow	None
WS18 Wheelsaw, 20 cm, Wheel & Trench Cleaner	6729537*WSE	200	150 - 450	Yes	62	80	1078	Yes	High Flow	None
WS-SL20 Wheelsaw with 5 cm segmented Wheel	7335772*WSG	50	250 - 500	No	50	80	1220	Yes	High Flow	None
WS-SL20 Wheelsaw with 8 cm segmented Wheel	7335772*WSA	80	250 - 500	No	40	80	1260	Yes	High Flow	None
WS-SL20 Wheelsaw with 10 cm segmented Wheel	7335772*WSF	100	250 - 500	No	50	80	1275	Yes	High Flow	None
WS-SL20 Wheelsaw with 12 cm segmented Wheel	7335772*WSH	120	250 - 500	No	55	80	1290	Yes	High Flow	None
WS24 Wheelsaw, 10 cm, Wheel & Trench Cleaner	6729566*WSF	100	200 - 600	Yes	72	67	1216	Yes	High Flow	None
WS24 Wheelsaw, 13 cm, Wheel & Trench Cleaner	6729566*WSB	130	200 - 600	Yes	80	67	1222	Yes	High Flow	None
WS24 Wheelsaw, 16 cm, Wheel & Trench Cleaner	6729566*WSC	160	200 - 600	Yes	96	67	1284	Yes	High Flow	None
WS24 Wheelsaw, 20 cm, Wheel & Trench Cleaner	6729566*WSE	200	200 - 600	Yes	96	67	1300	Yes	High Flow	None
WS32 Wheelsaw, 25 cm, Wheel	7197218	250	450 - 800	No	72	67	1440	Yes	High Flow	None



SPECIAL FEATURES OF THE WS-SL20:

SELF-LEVELLING,
TEETH SECTORS,
NO TRENCH CLEANER NEEDED,
MULTIPLE WIDTH OPTIONS,
INTEGRATED STABILIZER SYSTEM,
WATER KIT OPTION,
STANDARD RUBBER SHIELD



*PERFORMANCES ARE ESTIMATED ONLY AND CAN VARY DEPENDING ON THE TYPE OF CONCRETE, DEPTH OF USE, OPERATOR EXPERIENCE, ...

			Co	mpact	Track	Load	ers						S	kid-S	teer L	oader	s				
Description	Part Number	MT100	T450	T590/H	H/991	H/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	H/99S	S630/H	S650/H	H/9/S	S770/H	S/H/98S
VS18 Wheelsaw, 5 cm, Wheel & Trench Cleaner *	6729537*WSG			Х	Х	Х	Х	Х					χ2	Χ2	Х	Х	Х	Х	Х	Х	Х
VS18 Wheelsaw, 8 cm, Wheel & Trench Cleaner	6729537*WSA			Χ	Χ	Χ	Χ	Χ					χ²	χ2	Χ	Χ	Χ	Χ	Χ	Χ	Х
NS18 Wheelsaw, 10 cm, Wheel & Trench Cleaner	6729537*WSF			Χ	Χ	Χ	Χ	Χ					Χ²	Χ²	Χ	Χ	Χ	Χ	Χ	Χ	Х
WS18 Wheelsaw, 13 cm, Wheel & Trench Cleaner	6729537*WSB			Χ	Χ	Χ	Χ	Χ					χ²	χ²	Χ	Χ	Χ	Χ	Χ	Χ	Х
WS18 Wheelsaw, 16 cm, Wheel & Trench Cleaner	6729537*WSC			Χ	Χ	Χ	Χ	Χ					Χ²	χ²	Χ	Χ	Χ	Χ	Χ	Χ	Χ
NS18 Wheelsaw, 20 cm, Wheel & Trench Cleaner	6729537*WSE			Χ	Χ	Χ	Χ	Х					χ²	χ2	Χ	Χ	Χ	Х	Χ	Χ	Х
NS-SL20 Wheelsaw with 5 cm segmented Wheel	7335772*WSG			Χ²	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Χ
WS-SL20 Wheelsaw with 8 cm segmented Wheel	7335772*WSA			χ²	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Х
NS-SL20 Wheelsaw with 10 cm segmented Wheel	7335772*WSF			χ²	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Х
WS-SL20 Wheelsaw with 12 cm segmented Wheel	7335772*WSH			χ²	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Х
WS24 Wheelsaw, 8 cm, Wheel & Trench Cleaner	6729566*WSA					χ²	Хз	Χ											Χ	Χ	Χ
WS24 Wheelsaw, 10 cm, Wheel & Trench Cleaner	6729566*WSF			Χ	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Х
WS24 Wheelsaw, 13 cm, Wheel & Trench Cleaner	6729566*WSB			Χ	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Χ	Χ
WS24 Wheelsaw, 16 cm, Wheel & Trench Cleaner	6729566*WSC			Χ	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Х	Х	Х
WS24 Wheelsaw, 20 cm, Wheel & Trench Cleaner	6729566*WSE			Χ	Χ	Χ	Χ	Χ								Хз	Хз	Χ	Χ	Х	Х
WS32 Wheelsaw, 25 cm, Wheel	7197218					X ²	χ1	Χ												X ¹	Х

^{* 6729537*}WSG, this configuration is subject to capacity limitation, contact your Bobcat dealer for more information.

OPTIONS / ACCESSORIES		
Description	Part Number	Weight (kg)
WS18 Right Side Close Kit **	7302917	20
WS18 Left Side Close Kit **	7302918	20
WS18 Debris Deflector Large - RH **	7302919	20
WS18 Debris Deflector Large - LH **	7302920	20
WS18 Kit Rubber Shield**	7341699	4
WS-SL20 Right side close kit	7336181	15
WS-SL20, Kit, 5 cm Sector (5 pieces)	7335780*05CM	196
WS-SL20, Kit, 8 cm Sector (5 pieces)	7335781*08CM	229
WS-SL20, Kit, 10 cm Sector (5 pieces)	7335782*10CM	242
WS-SL20, Kit, 12 cm Sector (5 pieces)	7335783*12CM	257
WS24 Right Side Close Kit	7302921	22
WS24 Left Side Close Kit	7302922	22
WS24 Debris Deflector Large - RH	INCLUDED	22
WS24 Debris Deflector Large - LH **	7302923	22
WS24 Kit Rubber Shield **	7341700	6
Counterweight Kit, 90 kg **	7129250	90
Counterweight Kit, 136 kg **	7129251	136
Counterweight Kit, 181 kg **	7129252	181
Kit Nozzle Spray WS18/24	7339486	5
Kit Nozzle Spray WS32	7342576	5
Kit Nozzle Spray WSSL20	7336179	6

¹ If T770H has roller suspension, the counterweight kit 136 kg is required.



TO BE OPERATED ONLY IN HIGH FLOW.

160 2025/2026 161
** To be ordered through Bobcat Parts

² Approved with counterweight kit, 90 kg

³ Approved with counterweight kit, 136 kg





CUT THROUGH REBAR AND CONCRETE WITH THE WHEEL SAW

- Powerful cutting through rock, concrete and asphalt
- ▶ Trench up to 200 m/hour depending on ground condition, from 5 cm to 25 cm wide up to 80 cm deep
- **▶** Compact size: Easy to transport, minimizes traffic disturbance
- Less material to backfill, exact cut minimized damage to surrounding pavement

MORE INFO ON WWW.BOBCAT.COM



WOOD CHIPPER





Wood Chipper: Loader must be equipped with a 7-Pin Control Kit.

- The Bobcat Wood Chipper attachment is ideal to grind branches, trees and limbs, reducing branch volume from 10
- Grinds branches and trees up to 13 cm in diameter.
 The discharge chute can be rotated 360-degrees for maximum angle positioning.

 Operate the wood chipper from the cabin or using the Bobcat

Features & Benefits

- Remote Attachment Control (RAC) system. This allows the operator to start or stop the loader's engine and chipper rotation when standing beside the attachment.

 The unit comes with an automatic hydraulic feed, with speed
- control and load sensing system for best performance and constant flow.
- Large diameter, high torque feed roller for increase efficiency and productivity.
- Variable speed feed drive for adjusting the feed rate with a reversible option in case of plugging.
- Dual mounting locations, which allows material to be fed from the front or right side of the loader.

Description: The Bobcat wood chipper attachment grinds branches, trees and limbs, reducing branch volume 10 to 1. Unlike a pull-type wood chipper, the wood chipper attachment can easily be placed into backyards and remote areas with the manoeuvrability of a Bobcat loader. Hydraulic power feed is included as standard equipment. It allows the feed roller to move branches into the wood chipper at a consistent speed so the operator can work safely and efficiently.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Feeder Open- ing (mm)	Continu- ous Chip- ping Size (mm)	Feed Table Height (mm)	Blades	Flow Range (I/min)	Discharge Chute	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Chipper, 8B *	7117662	235	127	645	4 reversible tool steel blades	98 - 151	Rotates 360 °	753	Yes	High Flow	0.25 h

COMPATIBILITY CHARTS																					
			Compact Track Loaders					Skid-Steer Loaders													
Description	Part Number	MT100	T450	Т590/Н	Н/991	Н/9/1	H/0/L1	T86/H/S	S70	S100	S450	S510/H	S530/H	S550/H	S590/H	Н/998	S630/H	S650/H	H/9/S	H/077S	S/H/98S
Chipper, 8B *	7117662			X ¹				X1	X ¹	X1	X ¹	X1	X1	X ¹	X ¹	X1	X ¹				

¹High flow machines only






SMALL ARTICULATED LOADERS





ANGLE BROOM

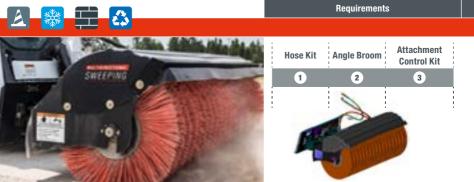

Sweep flush to a curb or wall on right side.
Adjust the broom angle with fingertip controls on a cabmounted attachment control kit (sold separately).
High-torque motor for heavy material.

Features & Benefits

- Proven, replaceable wafer bristles.
 Polypropylene bristle material for long life.

a Hose Kit and an Attachment Control Kit. Description: Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farmyards or warehouses, you can depend on the angle broom to get the job done right.

Angle Broom: Loader must be equipped with

TECHNICAL SPECIFICATIONS											
Description	Part Number	Sweep- ing Width (mm)	Sweep- ing Width Fully Angled (mm)	Brush Diameter (mm)	Number of Bristle Sections (zigzag - straight)	Degree of Angle	Flow Range (I/min)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Angle Broom, Reversible, 132 cm (ACD) ¹	M7043*4891347	1308	1200 @ 25°	660	25 - 2	± 25° (hydr. cyl.)	34.0 - 45.0	161	Yes	Standard / High Flow	None

¹coming standard with 14-Pin – when used on loaders equipped with a 7-Pin Attachment Control Kit, a 7-Pin Attachment T-Harness Kit is required - 7413216 **


COMPATIBILITY CHARTS									
Description	Part	Small Articulated Loaders							
Description	Number	L23	L28						
1 Hose Kit	7409112.EA	X	X						
2 Angle Broom, Reversible, 132 cm (ACD)	M7043*4891347	X	X						
3 14-Pin Attachment Control Kit **	7427921	X	X						

OPTIONS/ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909

SMALL ARTICULATED LOADERS B4501805-EN (01-25)

BREAKER









The cylindrical design improves access to jobs in confined areas, providing accurate attachment operation in more operating environments.

environments.

Upper and lower shock absorbers isolate the breaker from the housing, reducing noise and vibration to deliver operator comfort without sacrificing performance. Silenced standard for all breaker models.

- Diaphragm-type accumulators reduce maintenance by preventing slow leaks.
 Long-life breakers designed for all demolition jobs with minimal
- maintenance.
- The innovative steel ring feature allows retaining the tool bushing, protecting the grease access and provides a quick tool
- change solution.
 Designed for minimum downtime and with few service parts to reduce operation cost and improve overall lifetime of the attachment.
- Bobcat breakers produce low recoil and minimal hydraulic pressure spike to their carriers.


bolts, gauge tool and hose protector. Description: Bobcat breakers offer high performance, low maintenance, and are easy to use. All breakers feature a frame with a cylindrical design, providing improved access to jobs in confined areas. All breakers have a silenced housing as standard.


Breaker includes: Nail Point, fixing cap

TECHNICAL SPECIFICATIONS									
Description	Part Number	Flow (I/min)	Blow Rate - Soft Ground (beats/min)	Blow Rate - Hard Ground (beats/min)	Operating Pressure (bar)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Breaker, HB680	7113419	25 - 50	1220	1340	120	150	No	Standard	2 h

COMPATIBILITY CHARTS			
Description	Part	Small Articul	ated Loaders
Description	Number	L23	L28
1 Hose Kit	6727411	Х	Х
2 Bolt-on Mounting Frame	7113736.EA	X	Х
3 Breaker, HB680	7113419	X	Х









OPTIONS/ACCESSORIES						
Description	Part Number	Tools Selection	Dime	nsions		
Hose Guide Kit **	7413909					
InLine Wide Chisel **	7144678	Α	$X \times Y \times Z$ (mm)	115 × 120 × 15		
Nail Point **	7149302	В	(° Angle)	30		
CrossCut Asphalt Chisel **	7144679	С	$X \times Y \times Z$ (mm)	115 × 120 × 15		
InLine Chisel **	7144674	D	(° Angle)	30		
Blunt Point **	7144681	Е	(Ø in mm)	53		
Tamping Pad and Tool **	7144682	F	(mm)	200 × 200		
CrossCut Chisel **	7144673	G	(mm)	55		
Conical Point **	7144676	Н	(° Angle)	30		
CrossCut Wide Chisel **	7144677	I	$X \times Y \times Z$ (mm)	115 × 120 × 15		
InLine Asphalt Chisel **	7144680	J	$X \times Y \times Z (mm)$	115 × 120 × 15		

SMALL ARTICULATED LOADERS

B4501805-EN (01-25)

BRUSHCATTM ROTARY CUTTER





Requirements Features & Benefits

- Double-edge blade provides increased blade life by bidirectional cutter rotation (achieved by switching the hydraulic hoses at the drive motor).
- Direct hydraulic drive dampens impact loads and eliminates the need for shear pins or drive clutches.
- Front disks allow to better traverse uneven terrain while reducing operator fatigue.
- Floation linkage allows the deck to float over ground contours, keeping it in contact with the surface for optimum performance.
- Floating frame allows oscillation +/- 10 degrees
- Patented blade shutoff device stops blade rotation when rotary cutter is raised off the ground.

Description: Handle tough brush clearing and landscaping applications easily with the Brushcat™ rotary cutter. This attachment easily cuts through the toughest grass and brush while mulching small branches and saplings up to 7.6 cm in diameter. This tool is ideal for clearing lakefront property, construction sites, power line access roads, trails and ditches.

TECHNICAL SPECIFICATIONS													
Description	Part Number	Cutting Width (mm)	Cutting Height (mm)	Flow Range (I/min)	Tip Speed	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time				
Brushcat™ Rotary Cutter Standard Flow: RC44	7385981	1118	76,2	34-47 lpm	60.7 m/sec. @ 34 l/min 84.3 m/sec. @ 47 l/min	422	No	Standard	None				
Brushcat™ Rotary Cutter Standard Flow: RC54	7388300	1372	76,2	34-47 lpm	64.9 m/sec. @ 34 l/min 90.2 m/sec. @ 47 l/min	473	No	Standard	None				

COMPATIBILITY CHARTS			
Description	Part	Small Articu	lated Loaders
Description	Number	L23	L28
Brushcat™ Rotary Cutter Standard Flow: RC44	7385981	Х	X
Brushcat™ Rotary Cutter Standard Flow: RC54	7388300	Х	X


OPTIONS/ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909




BUCKET, DIRT

Features & Benefits





- easier.
 Replaceable cutting edges.
- Side cutting edges give better performance, increase strength and extend bucket life.



Description: Ideal for everything from digging to material handling. Dirt buckets offer good cutting edge visibility and excellent bucket breakout force for better digging and easier bucket filling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, Dirt, 112 cm	7117433.EA	112	160	70	7	85	63	51	None

COMPATIBILITY CHARTS										
Description	Part	Small Articul	ated Loaders							
Description	Number	L23	L28							
Bucket, Dirt, 112 cm	7117433.EA	X	X							

OPTIONS / ACCESSORIES							
Description	Part Number						
Bolt-On Teeth Kit (Set of 7) **	6728247						
Bolt-On Cutting Edge **	6729043						
Bucket Bite Tooth Bar **	7125548						
Side Utility Plate Kit **	7125270						

Bolt-On Teeth



Bolt-On Cutting Edge



Bucket Bite Tooth Bar



SMALL ARTICULATED LOADERS

B4501805-EN (01-25)

BUCKET (GP), GENERAL PURPOSE





Features & Benefits

- Round back design enhances bucket loading and
- Flat back assures a secure attaching area for the Bob-Tach™ mounting system
- · Low heel makes cutting grade and backdragging
- Replaceable cutting edges
- Side cutting edges give better performance, increases strength and extends bucket life

General Purpose Buckets (GP): Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

Description: General purpose buckets have a longer bottom than the dirt style. They offer excellent cutting edge visibility and good breakout force. General purpose buckets are ideal for light duty and medium duty grading and levelling applications as well as material handling.


TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time		
Bucket, General Purpose, 112 cm	7114581.EA	112	210	70	7	94	76	51	None		
Bucket, General Purpose, 127 cm	7114583.EA	127	240	70	7	101	76	51	None		

COMPATIBILITY CHARTS										
Description	Part	Small Articulated Loaders								
Description	Number	L23	L28							
Bucket, General Purpose, 112 cm	7114581.EA	Х	X							
Bucket, General Purpose, 127 cm	7114583.EA	X	X							

OPTIONS / ACCESSORIES									
Description	GP Bucket 112 cm	GP Bucket 127 cm							
	7114581.EA	7114583.EA							
Utility Grapple, 81 cm	7125370	7125370							
Bolt-On Teeth Kit (Set of 7) **	6728247	6728247							
Bolt-On Cutting Edge **	6729043	7104502							
Bucket Bite Tooth Bar **	7125548	7125549							
Side Utility Plate Kit (set of 2) **	7104358	7104358							

BUCKET, UTILITY

Features & Benefits

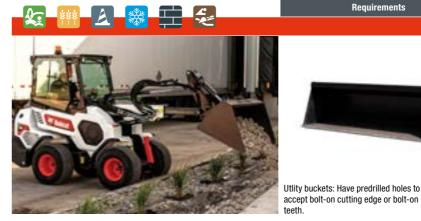

grading and levelling applications as well as material handling.



Utlity buckets: Have predrilled holes to

• Round back design enhances bucket loading and

• Flat back assures a secure attaching area for the Bob-Tach™ mounting system

· Low heel makes cutting grade and backdragging

Replaceable cutting edges

 Seethrough back part of the bucket for improved visiblity to the cutting edge

Description: Utility buckets have a longer bottom than the dirt style. They offer excellent cutting edge visibility and good breakout force. Utility buckets are ideal for light duty and medium duty

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time		
Bucket, Utility, 112 cm	7387672	112	280	70	5	105	80.5	51.9	None		
Bucket, Utility, 137 cm	7387673	137	348	70	6	123	80.5	51.9	None		
Bucket, Utility, 152 cm	7387674	152	388	70	7	133	80.5	51.9	None		

COMPATIBILITY CHARTS										
Description	Part	Small Articulated Loaders								
Description	Number	L23	L28							
Bucket, Utility, 112 cm	7387672	X	X							
Bucket, Utility, 137 cm	7387673	X	X							
Bucket, Utility, 152 cm	7387674		X							


OPTIONS / ACCESSORIES								
Description	Part Number							
Bolt-On Teeth Kit (Set of 7) **	7388061							
Bolt-On Cutting Edge **	7387887							

SMALL ARTICULATED LOADERS

B4501805-EN (01-25)

DUMPING HOPPER



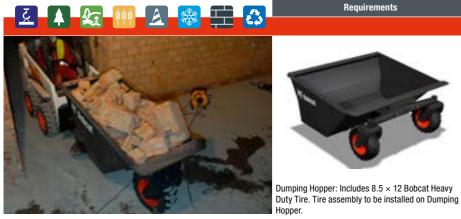

equirements Features & Benefits

- The Bob-TachTM system allows the dumping hopper to tip forward and empty itself simply by raising the Bobcat loader's lift arm and rolling out the Bob-TachTM.
- The dumping hopper's castor wheel design with flotation tyres accommodates uneven ground conditions.
- Inside surfaces are flat and smooth to prevent material from sticking.
- The bottom plate has pre-drilled holes to evacuate rainwater.

Description: Park it, load it and dump it. This attachment mounts as easily as a bucket on your loader, and can go wherever your loader goes. Empties fast and easy, just raise the loader arms and dump. Flat, smooth interior surfaces prevent materials from sticking.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Length (mm)	Width (mm)	Height (mm)	Capacity Heaped (m³)	Capacity Struck (m³)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Dumping Hopper, 10	6727275	2108	914	1016	0.84	0.73	304	No	Standard	0.5 h

CO	COMPATIBILITY CHARTS										
	Description	Part	Small Articu	lated Loaders							
	Description	Number	L23	L28							
Du	imping Hopper 10	6727275	X	X							

GRAPPLE, FARM – UTILITY ON BUCKET



Description: This is the easy way to handle loose hay, bedding and manure on the farm and other sites. Use the utility bucket by itself or add the hydraulic grapple for more gripping power.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Farm / Utility Grapple on Bucket, 81 cm, 3 Teeth	7125370	81	1020	3	5	180	814	78	No	Standard	None

COMPATIBILITY CHARTS										
Description	Part	Small Articulated Loaders								
Description	Number	L23	L28							
1 Hose Kit	7408932.EA	X	X							
Bucket, GP, 112 cm	7114581.EA	X	X							
Bucket, GP, 127 cm	7114583.EA	X	X							

OPTIONS/ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909




SMALL ARTICULATED LOADERS

B4501805-EN (01-25)

GRAPPLE, INDUSTRIAL



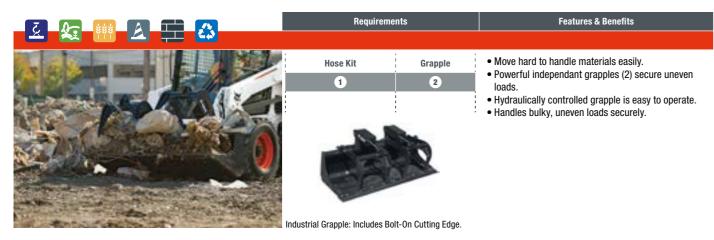

Description: Built tough for reliability and endurance, the industrial bucket and fork with grapple will easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Num- ber of Grapples	Number of Teeth STD	Number of Teeth Max.	Max. Open Height (cm)	Jaw Opening at Max. Open Height (cm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Grapple, Industrial Bucket, 91 cm	7493574	91	1 x 6	-	-	108	80	165	No	Standard	2.5 h
Grapple, Industrial Bucket, 122 cm	7493572	122	1 x 6	-	-	108	80	202	No	Standard	2.5 h

COI	MPATIBILITY CHARTS							
	Description	Part	Small Articulated Loaders					
	Description	Number	L23	L28				
0	Hose Kit	7408932.EA	X	X				
2	Grapple, Industrial Bucket, 91 cm	7493574	X	X				
2	Grapple, Industrial Bucket, 122 cm	7493572	X	X				

OPTIONS/ACCESSORIES							
Description	Part Number						
Hose Guide Kit **	7413909						



GRAPPLE, ROOT



 Heavy duty design improves wear life in tough land clearing and demolition applications.

Features & Benefits

 Curved tooth design permits material to be picked up without driving teeth into the ground and allows dirt to fall between teeth, leaving dirt on side. Fully enclosed mounting frame extends wear life by mini-

mizing flexing in frame area.

• Inertia-welded cylinder ends – a Bobcat exclusive – permit strong, smooth, durable grapple operation by improving hydraulic cushioning at the end of the stroke.

Protected hydraulic hoses limit damage to hoses from

Utlity buckets: Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

Description: Built tough for reliability and endurance, the root grapple easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Max. Height with Grapple Raised (cm)	Max. Tooth Opening (cm)	Teeth	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Root Grapple, 91 cm	7493347	91	109	81	5	143	No	Standard	None
Root Grapple, 122 cm	7493345	122	109	81	7	179	No	Standard	None

COMPATIBILITY CHARTS						
Description	Part Number	Small Articulated Loaders				
ม _ี ธรษาหนึ่งแ		L23	L28			
1 Hose Kit	7408932.EA	X	X			
Root Grapple, 91 cm	7493347	X	X			
Root Grapple, 122 cm	7493345	X	X			

OPTIONS/ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909

LANDPLANE





Features & Benefits

- Allows controlled grading and levelling in both forward and reverse directions.
- Can be used like a bucket to transport material on site.
- · Peels and removes sod.
- · Scarifier breaks up hard ground. Sorts unwanted debris from soil.
- · Pulverises soil clods.
- Aerates soil for seeding and sodding.
- Bob-Tach™ mounted.
- Bi-directional operation.
- Bi-directional scarifier.
- · Removable screen.

andplane: Includes expanded metal grate, scarifier

Description: A landscaping must. It grades and levels in both forward and reverse and peels and removes sod. The deluxe landplane includes a bi-directional scarifier and removable screen to pulverise soil clods, aerates and sorts debris from soil.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Width (cm)	Digging Depth (cm)	Cutting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Landplane Deluxe, 122 cm	6907173	122	7.6	12.7 × 102	191	No	Standard	None

COMPATIBILITY CHARTS							
Description	Part	Small Articulated Loaders					
Description	Number	L23	L28				
Landplane Deluxe, 122 cm	6907173	X	X				







MEET THE CHALLENGING DEMANDS OF LANDSCAPING JOBS WITH THIS LOG GRAPPLE


• Get outstanding grip with the equipped heavy-duty teeth and reinforced tines. Perfect for managing logs and brush!

ATTACHMENT: LOG GRAPPLE

- Easily clamp on landscape debris with the grapple's 142 cm wide opening and 360° rotation.
- For better stability during operation, the log grapple comes with rope bollards.
- Integrated tree pusher for increased operator control and safety.
- **▶** Use this attachment with your Small Articulated Loader or Mini Track Loader.

MORE INFO ON WWW.BOBCAT.COM

LOG GRAPPLE

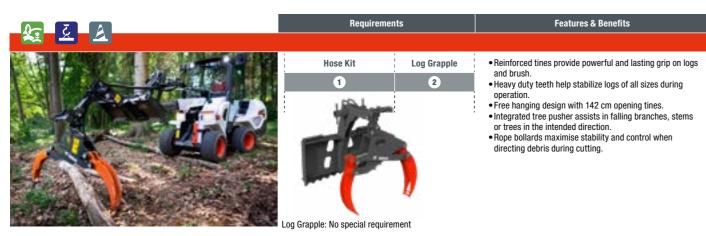

Description: Meet the challenging demands of landscaping and municipality jobsites with our new log grapple! Loading logs onto trailers or transporting material out of your yard has never been easier. This free-hanging log grapple attachment has the brute force and agility to lift and move heavy logs and brush - even on tight worksites or properties.


TECHNICAL SPECIFICATIONS								
Description	Part Number	Cylinder Stroke	Cylinder Bore Diameter	Cylinder Rod Diameter	Max. Opening (mm)	Max. Reach (mm)	Weight (kg)	Control Kit Required
Log Grapple 56"	7401254	190.2	50.8	31.8	1429	1726	152	No

COMPATIBILITY CHARTS								
Description	Part Number	Small Articulated Loaders						
Description		L23	L28					
1 Hose Kit	7440224	Х	Х					
2 Log Grapple 56"	7401254	X	Х					

OPTIONS/ACCESSORIES						
Description		Part Number				
Hose Guide Kit **		7413909				



PALLET FORKS

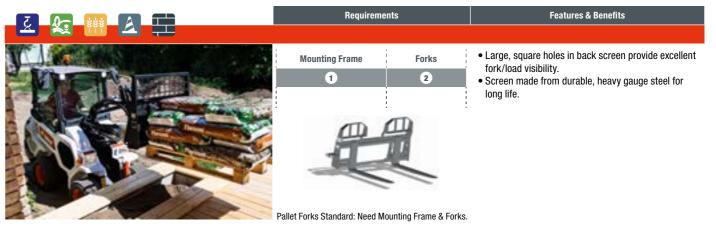

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Fork Width (cm)	Frame Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Pallet Fork Frame Standard Duty	7297499.T	10	60	No	Standard	0.25 h
Pallet Fork Frame Standard Duty	6809716.T	10	47	No	Standard	0.25 h

COI	COMPATIBILITY CHARTS										
	Description	Part	Small Articulated Loaders								
	มะระกานแกก	Number	L23	L28							
	Pallet Fork Frame Standard Duty	7297499.T	Х*	X*							
_	Pallet Fork Frame Standard Duty	6809716.T	X*	X*							
	Pallet Fork Teeth 91 cm, Heavy Duty (Set of 2)	6540184	Х*	X*							
2	Pallet Fork Teeth 106 cm, Heavy Duty (Set of 2)	6540183	X*	X*							
	Pallet Fork Teeth 122 cm, Heavy Duty (Set of 2)	6540182	Х*	Х*							

^{*} Pay attention to the max. pallet fork frame load rating (1130 kg for standard duty pallet fork frames).

SNOW BLOWER



Features & Benefits

Attachment Control Kit

Snow Blower: Includes a hydraulic motor package. Loader must be equipped with a 14-pin Attachment Control Kit.

- Increased intake height and a larger auger draw in more snow for faster removal.
- · Redesigned, rounded intake minimizes clogging and improves snow flow.
- Aggressive auger teeth easily break up and tear through hard-packed snow and ice.
- Reversible and replaceable wear edge bites into hard ice and packed snow and is designed for long life.
- Adjustable side-mounted and skid shoes allow operators to set the cleaning depth to match the jobsite.
- The truck loading chute allows the snowblower to place snow high in a truck box for easier removal and hauling.

Description: Clear snow off driveways, parking lots and sidewalks with our Bobcat snow blower. The snowblower attachments feature a new and extremely durable direct-drive, sprocket-style chute that operators can rotate to throw snow in virtually any direction and place it wherever the job requires - even hard-to-reach places.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Outside Width (mm)	Hydraulic Motor Package	Auger Diameter (mm)	Fan Diameter (mm)	Height (mm)	Side Height (mm)	Flow Range (I/m)	Working Flow	Control Kit Required
Snow Blower 26x48	M7053*5653112	1219	OMPX50	356	381	1511	673	30.3-45.4	Standard	Yes

COMPATIBILITY CHARTS											
Description	Part	Small Articulated Loaders									
Description	Number	L23	L28								
1 Hose Kit	7408947.EA	Х	Х								
2 Snow Blower 26x48	M7053*5653112	X	X								
3 14-Pin Attachment Control Kit **	7427921	Х	Х								

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Hose Guide Kit **	7413909	2.5	-
Truck loading chute (32-36) **	7456370	73	2.5 h



SNOW V-BLADE



Attachment Snow V-Blade **Control Kit**

Snow V-Blade: Loader must be equipped with an Attachment Control Kit. When used on loader equipped with a 14-Pin Attachment Control Kit, a 14-Pin Attachment T-Harness Kit (Part Number 6725383) is required.

- V-Blade: clear a path through deep snow.
- Straight Blade: pile large amounts of snow. • Scoop Blade: scoop, push or pile snow.
- 30° Left or Right Angle Blade: continuously push snow to either side of the loader.

Features & Benefits

- Fingertip adjustments of V-blade's five configurations.
 Multi-position frame allows blade to be raised or lowered to desired working height.
- Domed, adjustable skid shoes and trip springs provide operator and component protection.
- · Optional rubber cutting edge kits available

Description: This versatile, hydraulically operated attachment offers five different blade configurations to help operators move snow fast. The blade has on-the-go fingertip control and angles 30° right or left to continuously push snow to either side of the loader, straight or scoop configuration to push large amounts of snow, or v-configuration to plow through the deepest snow.



TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Working Width (Scoop Blade) (cm)	Working Width (Angled 30°) (cm)	Working Width (V-Blade) (cm)	Oscillation (with Flotation Kit) ± (°)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Snow V-Blade, 152 cm1	7104861	152	134	137	138	10	331	Yes	Standard	None


¹A 14-Pin Attachment Control Kit, a 14-Pin Attachment T-Harness Kit (6725383) is required

COMPATIBILITY CHARTS										
Description	Part	Small Articu	lated Loaders							
Description	Number	L23	L28							
1 Hose Kit	7415232.EA	X	Х							
2 Snow V-Blade, 152 cm	7104861	X	Х							
3 14-Pin Attachment Control Kit **	7427921	X	Х							

OPTIONS / ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909
Rubber Cutting Edge Kit, 152 cm (Includes hardware) **	6958664

SOIL CONDITIONER



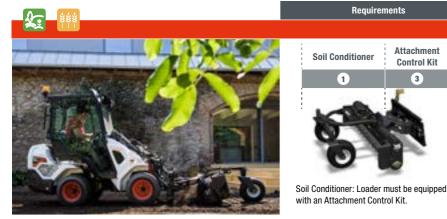


Features & Benefits

Control Kit

• Produces a perfect bed for seeding or laying grass turf. . Windrows and separates rocks and other debris.

- Impressively grades and levels topsoil with ease in floating or fixed mode per landscape requirement.
- Tears out old sod.
- Pulverizes dirt clumps.
- Forward and reverse raking action.
- Roller bar follows ground contours perfectly.
- Flip-up front bolster lets you get close to buildings and saves space during transport.
- Direct-drive motor eliminates chain and sprocket problems.





Description: A versatile, cost-effective landscaping attachment. It saves time and labour when smoothing ruts, moving material or levelling mounds.

Produces a perfect bed for seeding and sodding.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Working Width (fully angled 25°)	Angling / Depth Adjust- ment	Number of Teeth	Tyres	Required Hydraulic Flow (I/min)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Soil Conditioner, 122 cm, Manual	6958310	122	116	Manual	81	Pneumatic	38 - 68	288	No	Standard	None

CO	COMPATIBILITY CHARTS												
	Description	Part	Small Articulated Loaders										
	Description	Number	L23	L28									
1	Soil Conditioner, 122 cm, Manual	6958310	Х	X									
2	14-Pin Attachment Control Kit **	7427921	Х	X									

OPTIONS/ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909












ATTACHMENT: STUMP GRINDER

GRIND TREE STUMPS INTO MULCH LIKE A PRO WITH THIS STUMP GRINDER

- For increased productivity during operation, the work group is mounted at an angle for excellent visibility, and the design of the swing cylinder does not require the operator to reposition its arc
- Ideal for landscaping contractors, municipalities, and homeowners with acreage
- ▶ This attachment can even go through tight spaces, like gates and backyards, easily
- ▶ With this stump grinder you can improve your land aesthetics, gain agricultural space, as well as improve safety

STUMP GRINDER



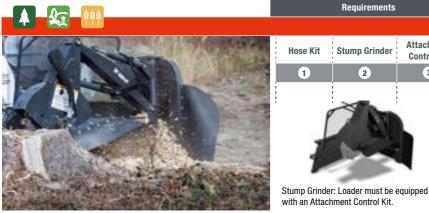

Features & Benefits

Attachment

Control Kit

• The work group is mounted at an angle of 90° to the operator for excellent visibility to the cutting area, giving the operator the same wide view as a pull-behind stump

- The swing cylinder design generates an impressive arc. This allows the operator to cut large stumps without repositioning.
- Rubber deflector shields and screening provide additional operator comfort and protection from wood chips.
- The unique valve design controls the swing circuit speed
- to prevent the cutting wheel from stalling in the cut.
- Diverse cutting heights gives better access for a variety of size stumps.

Description: Grind tree stumps into mulch with the powerful action of the stump grinder attachment. Designed for maximum operating capability, the stump grinder mounts directly to the front of a carrier for easy maneuvering in tight areas and positioning exactly where grinding action is needed. Mounted at a 90-degree angle to the operator, the stump grinder offers increased visibility to the cutting area, giving the operator the same wide view as with any pull-behind grinder. The stump grinder is the ideal attachment for landscaping contractors, homeowners with acreage, campus facilities, municipalities, and rental contractors.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Flow Range (I/min)	Cutting Height (mm)	Max. Cutting Depth (mm)	Max. Cutting Angle (°)	Grinder Reach at Ground Level (mm)	Number of Teeth	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Stump Grinder, SG30	7100641	38 - 53	279	279	90	1175	16	171	Yes	Standard	None

COMPATIBILITY CHARTS							
Description	Part	Small Articulated Loaders					
Description	Number	L23	L28				
1 Hose Kit	7409065.EA	X	X				
2 Stump Grinder, SG30	7100641	X	X				
3 14-Pin Attachment Control Kit **	7427921	X	X				

OPTIONS/ACCESSORIES						
Description	Part Number					
Hose Guide Kit **	7413909					







• Cleans in forward or reverse.

- Wear compensation for increased bristle life by patented
- height adjustment system. • Reversible cutting edge and side protection as standard

Features & Benefits

- ensures long product life.
- Standard cutting edge of the sweeper can be used to scrape packed material.
- Motor drain line except SW110.
- Equipped with new heavy duty bristles.
- Optional steel and polyurethane mix bristles.
- Optional gutter brush can be installed to increase versatility and increase sweeping width.
- An optional water tank can be fitted on top of the sweeper.

Sweeper: No special requirement.

Spray kit also compatible with existing loaders water kit.

Description: The Bobcat sweeper can sweep and collect dirt or other debris in both forward and reverse. This attachment is perfect for cleaning parking lots, sidewalks, docks, and warehouses. New features like patented height adjustment placed on the top of the sweeper, double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Max. Flow Range (I/min)	Weight (kg)	Control Kit Required
Sweeper, 110 cm	7439853	110	0.20	550	PP*	25	30 - 60	258	No
Sweeper, 110 cm - Steel/PP *	7439853.SP	110	0.20	550	Steel/PP*	25	30 - 60	258	No
Sweeper, 140 cm	7439854	140	0.33	550	PP*	32	60 - 115	381	No
Sweeper, 140 cm - Steel/PP *	7439854.SP	140	0.33	550	Steel/PP*	32	60 - 115	381	No

^{*} Polypropylene

COMPATIBILITY CHARTS							
Book C. Pro-	Part	Small Articulated Loaders					
Description	Number	L23	L28				
Sweeper, 110 cm	7439853	Х	Х				
Sweeper, 110 cm - Steel/PP	7439853.SP	X	X				
Sweeper, 140 cm	7439854	X	X1				
Sweeper, 140 cm - Steel/PP	7439854.SP	X	Х1				
¹ Carrier boom has to be retracted during operation							

OPTIONS / ACCESSORIES							
Description	Part Number	Weight (kg)	First Use Installation Time				
Hose Guide Kit **	7413909	2.5					
Gutter Brush Right Side (for Sweepers 140 cm)	7440928	50	15 min				
Gutter Brush Left Side (for Sweepers 140 cm)	7441403	50	15 min				

SWEEPER, MULTIPURPOSE



Description: The Bobcat multipurpose sweeper can sweep and collect dirt or other debris. Floating parallelogram self-levelling system guarantee an ease of operation while getting the job done. Angling the sweeper and reversing the flow it can be use for material removal without collection on the hopper. Multiple interface adapter easily interchangeable for each carrier. This attachment is perfect for cleaning parking lots, roads, docks, and warehouses.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (straight/ angled) (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required
Multipurpose Sweeper, 135 cm	7457925	135 / 127	0.09	590	pp	25 + 2	40 - 50	363	No
Multipurpose Sweeper, 150 cm	7457926	150 / 141	0.11	590	pp	28 + 2	40 - 50	385	No

COMPATIBILITY CHARTS							
		Small Articu	Small Articulated Loaders				
Description	Number	L23	L28				
Adapter Frame BT	7467998	Х	Х				
Multipurpose Sweeper, 135 cm	7457925	X	X1				
Multipurpose Sweeper, 150 cm	7457926	X	X1				
3 Counterweight **	7362520	X	X				

¹Carrier boom has to be retracted during operation Water tank not approved for application

OPTIONS / ACCESSORIES							
Description	Part Number	Weight (kg)	First Use Installation Time				
Hose Guide Kit **	7413909	2.5					
Gutter Brush Right Side	7468288	40	30 min				
Gutter Brush Left Side	7468289	40	30 min				



FOR BETTER PERFORMANCE, LONG **BRISTLE LIFE, AND LOW FUEL CONSUMPTION, SEE** THE OPERATOR'S MANUAL FOR RECOMMENDED SETTINGS

OPTION	S / ACCESS	URIES COM	PAHBILHY

Description	Sweeper 135 cm 7457925	Sweeper 150 cm 7457926
Gutter Brush Right Side	7468288	7468288
Gutter Brush Left Side	7468289	7468289






THE BEST SWEEP **PERFORMANCE IS ACHIEVED WITH SMALLER CARRIER WIDTH THAN SWEEPER, WITH THE SWEEPER ANGLED, AND AT 6KM/H TRAVEL SPEED**





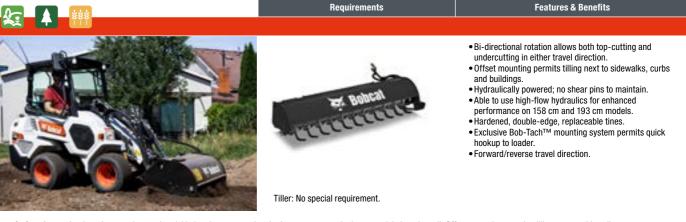

Description: A great landscaping attachment. It quickly breaks up ground and mixes compost and other materials into the soil. Offset mounting permits tilling next to sidewalks, curbs and buildings.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Digging Depth (cm)	Required Hydraulic Flow (I/min)	Number of Tines	Travel Direction	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Tiller, 102 cm	7196028	102	10.2	34 - 68	32	Forward/ Reverse	230	No	Standard	None

COMPATIBILITY CHARTS						
Description	Part	Small Articul	Small Articulated Loaders			
	Number	L23	L28			
Tiller, 102 cm	7196028	Х	Х			

OPTIONS / ACCESSORIES							
Description	Part Number						
Hose Guide Kit **	7413909						
Bottom Skid **	7280548						



BETTER PERFORMANCES ARE ACHIEVED WHEN TILLER TURNS IN THE OPPOSITE **DIRECTION OF THE MACHINE**

SMALL ARTICULATED LOADERS

B4501805-EN (01-25)

TRENCHER





Requirements Performance* Features & Benefits

• Speed: Up to 90m/hour

*Performance are estimated only and can vary depending on the type of soil, depth of use, operator experience. ... Designed and built specifically for Bobcat loaders.
 Hydraulic sideshift capability to trench close to buildings,

fences or other objects.

Get even closer by removing the auger.

 Changing to a trencher attachment is quick and easy with the Bob-Tach™ mounting system.

Trencher: No special requirement.

Description: This versatile tool can be used for a variety of jobs ranging from light to high-production trenching. Digging depths range from 60 cm to 1.5 m. The sideshift feature lets you get close to walls or fences.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Digging Depth (mm)	Trench Width (mm)	Boom Length (mm)	Working Speed (m/h)	Required Hydraulic Flow (I/min)	Sideshift (mm)	Sideshift System (as stan- dard)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Trencher, LT112 w/ Chain Complete	M7011*1499981	600	101 - 203	1000	± 250 - 500	34 -57	409	Manual	278	No	Standard	None
Trencher, LT113 w/ Chain Complete	M7014*1508970	900	101 - 203	1334	± 250 - 500	34 -57	409	Manual	289	No	Standard	None

COMPATIBILITY CHARTS										
Description	Part	Small Articulated Loaders								
Description	Number	L23	L28							
Trencher, LT112 w/ Chain Complete	M7011*1499981	X	X							
Trencher, LT113 w/ Chain Complete	M7014*1508970	X	X							

OPTIONS / ACCESSORIES	
Description	Part Number
Hose Guide Kit **	7413909
Cup Tooth Kit, LT112, LT113, LT213 **	6701918
Carbide Tooth Kit, LT112, LT113, LT213 **	6705531
Spacer Kit, 15 cm, LT112, LT113, LT213 (Used with cup teeth for 15 cm width) ** $$	7110909
Spacer Kit, 20 cm, LT112, LT113, LT213 (Used with cup teeth for 20 cm width) ** $$	7110910
Trench Cleaner Adapter, 15 cm, LT112, LT113, LT213 **	6806974
Trench Cleaner Adapter, 20 cm, LT112, LT113, LT213 **	6806975

Cup Teeth Patterns



Dalla a

Spacer Kits *
Widens the chain up to 30 cm.



PERFORMANCE ARE
ESTIMATED ONLY AND CAN
VARY DEPENDING ON THE
TYPE OF SOIL, DEPTH OF USE,
OPERATOR EXPERIENCE, ...



*IMPORTANT: WHEN
INSTALLING SPACER KITS,
A TRENCH CLEANER ADAPTER
MUST ALSO BE INSTALLED

UTILITY FORK





 Bob-Tach™ Attachment Mounting System: Makes easy work of attaching and detaching the utility fork. Fast and easy mounting means spending less time on attachment changes and more time on the job.

Features & Benefits

 Replaceable Teeth: For easy attachment maintenance, utility fork teeth are replaceable, keeping the attachment working smoothly and maximizing time spent getting work done. Provisions for adding additional forks to narrow the space between fork tines.

Utility Fork: No special requirement.

Description: Handle materials easier and move materials faster with the utility fork attachment. The strong, replaceable, tapered teeth handle a variety of farm and ranch chores easily and efficiently


TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (mm)	Max. Height with Grapple Raised (mm)	Stan- dard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Utility Fork, 91 cm, 5 Teeth	6966230.EA	905	1080	5	9	208 / 104	874	100	No	Standard	2.5 h
Utility Fork, 137 cm, 7 Teeth	6966227.EA	1370	1080	7	13	208 / 104	874	137	No	Standard	2.5 h


COMPATIBILITY CHARTS	COMPATIBILITY CHARTS										
Dogorintian	Part	Small Articulated Loaders									
Description	Number	L23	L28								
Utility Fork, 91 cm, 5 Teeth	6966230.EA	Х	Х								
Utility Fork, 137 cm, 7 Teeth	6966227.EA	X	Х								

OPTIONS / ACCESSORIES						
Description	Part Number					
Hose Guide Kit **	7413909					
Farm / Utility Grapple	6966687.EA					

Farm / Utility Grapple



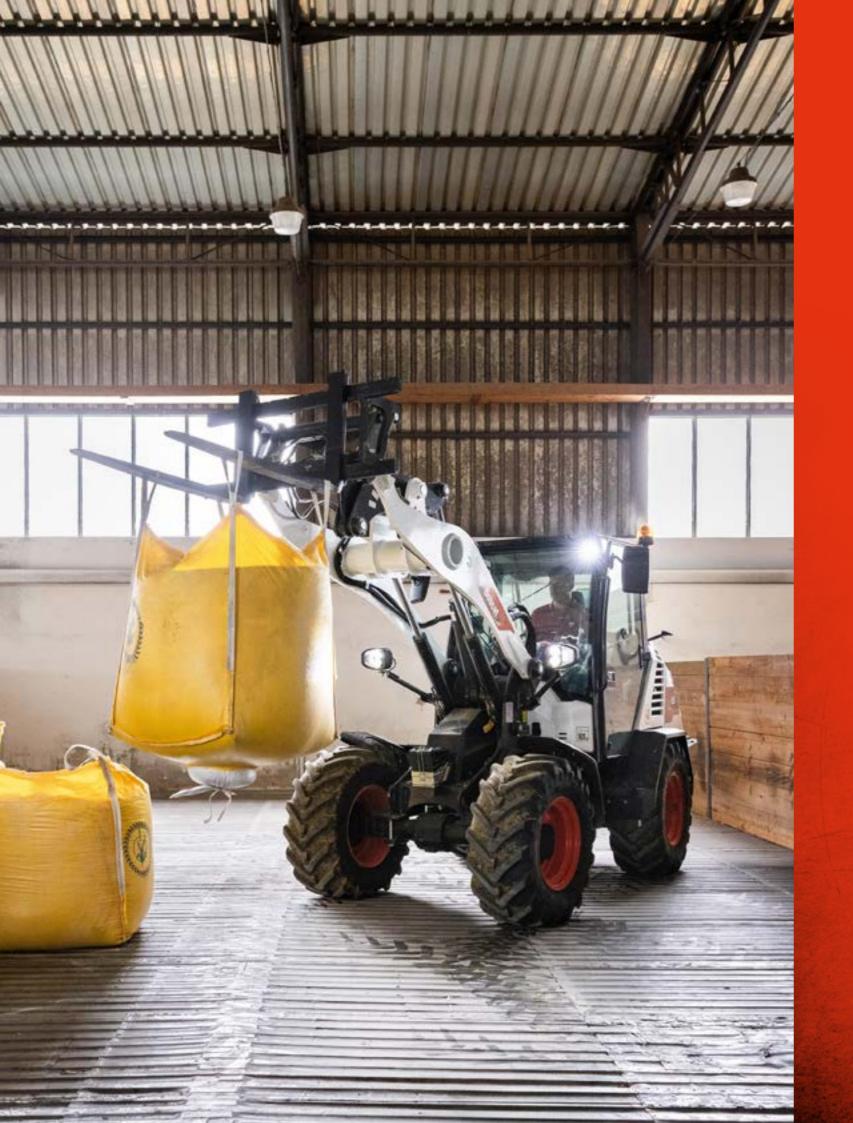


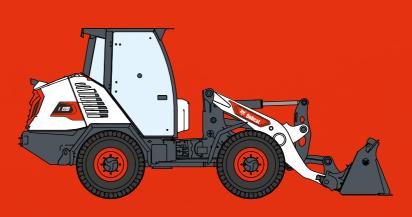

COMPACT WHELL LOADERS

ANGLE BROOM



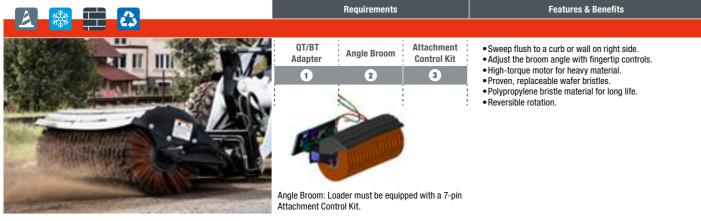

Description: Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farmyards or warehouses, you can depend on the angle broom to get the job done right.


TECHNICAL SPECIFICATIONS											
Description	Part Number	Sweep- ing Width (mm)	Sweeping Width Fully Angled (mm)	Brush Diam- eter (mm)	Number of Bristle Sec- tions (zigzag - straight)	Degree of Angle	Flow Range (I/min)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Angle Broom, Reversible, 213 cm (ACD)	7337715	2134	1956 @ 25°	813	48 - 2	± 25° (hydr. cyl.)	57.0 - 106.0	428	Yes	Standard / High Flow	None

COMPATIBILITY CHARTS											
		Compact Wheel Loaders									
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach				
1 QT/BT Adapter required	7429653				Х		Х				
2 Angle Broom, Reversible, 213 cm (ACD)	7337715			Х	Х	Х	Х				

OPTIONS / ACCESSORIES	
Description	Part Number
Spray Nozzle Kit **	7113709





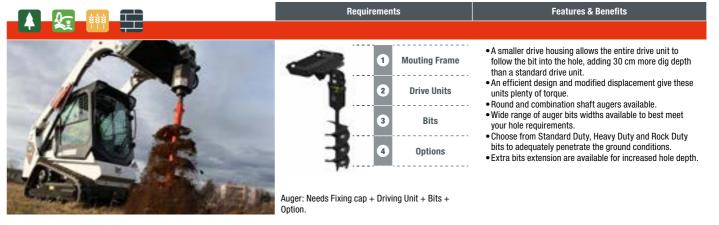

Description: Speed and perfect vertical accuracy are what you get with this high-torque, heavy-duty hydraulic auger. Its unique "knuckle-joint" design allows it to hang perfectly vertical, on flat or uneven terrain. The entire drive unit follows the bit into the hole, adding 30 cm more dig depth than a standard unit. This is the ideal tool for drilling holes for posts, piers, poles and trees in all kinds of soil conditions. Choose from 3 types of bits to best suit the ground conditions (standard, heavy duty and rock) and a multitude of widths to best meet your hole width requirement.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Auger Bit Type	Digging Depth (mm)	Max. Operating Pressure (bar)	Torque @ Max. Pressure (Nm)	Max. speed (RPM) @ Max. Rated Flow (I/min)	Delivered with Pin for Auger Bit	Weight (kg)	Control kit re- quired	Working Flow	First Use Installa- tion Time
High Torque Auger 35PH Drive	7220280	Hex	1829	241	5644 @ 241	98 @ 144	HEX	131	No	Standard / High Flow	0.5 h
High Torque Auger 50PH Drive	7227984	Hex	1829	241	7175 @ 241	77 @ 144	HEX	131	No	Standard / High Flow	0.5 h

COMPATIBILITY CHARTS										
		Compact Wheel Loaders								
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach			
QT/BT Adapter Required	7429653				Χ		Х			
2 Moutning Frame High Torque Auger	7223507			Х	Х	Х	Х			
3 High Torque Auger 35PH Drive	7220280			Х	X	Х	Χ			

C	COMPATIBILITY CHARTS			
	Description	Part Number	High Torque Auger 35PH	Weight
	High Torque Auger Bit HEX 20 cm HD **	7243233	X	47 kg
	High Torque Auger Bit HEX 30 cm HD **	7243234	X	53 kg
	High Torque Auger Bit HEX 46 cm HD **	7243235	X	68 kg
	High Torque Auger Bit HEX 61 cm HD **	7243236	X	83 kg
	High Torque Auger Bit HEX 76 cm HD **	7243237	X	123 kg
	High Torque Auger Bit HEX 91 cm HD **	7243238	X	151 kg
	High Torque Auger Bit HEX 122 cm HD **	7243239	X	215 kg
	High Torque Auger Bit HEX 20 cm ROCK **	7243240	X	48 kg
	High Torque Auger Bit HEX 30 cm ROCK **	7243241	X	54 kg
	High Torque Auger Bit HEX 46 cm ROCK **	7243242	X	70 kg
	High Torque Auger Bit HEX 61 cm ROCK **	7243243	X	87 kg
	High Torque Auger Bit HEX 76 cm ROCK **	7243244	X	128 kg

BUCKET, COMBINATION

Features & Benefits • Ideal for dozing, grappling, levelling, digging, loading and Combination Bucket dumping applications. Built with heavy duty cutting edges for long product life. • Thanks to the opening design, the bucket can be used for clamping materials in construction, recycling, forestry or other applications, while fully opening it can enable the operator to use it as a dozer blade if needed. Optional bolt-on teeth and reversible cutting edge Combination Buckets: Have predrilled holes to accept bolt-on cutting edge or

Description: Dozing, levelling, grappling, digging, loading and dumping, this multipurpose bucket does it all. Use it for demolition, construction, landscaping and municipal jobsites. It's designed to provide optimum digging force and the interlocking serrated grapple edges to hold objects securely.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Capacity (I)	Heaped Capacity (m³)	Bucket Back Angle (°)	Accepts max. number of teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Combination Bucket 190 cm, Bob-Tach™	7393686	190	700	0.7	65	9	462	88	88	None
Combination Bucket 190 cm, Quick-Tach	7393689	190	550	0.55	65	9	424	74	88	None
Combination Bucket 190 cm, Quick-Tach	7393687	190	700	0.7	65	9	474	90	88	None

COI	COMPATIBILITY CHARTS							
					Compact Wi	neel Loaders		
	Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach
	Combination Bucket 190 cm, Bob-Tach™	7393686	1200		1600		2000	
0	Combination Bucket 190 cm, Quick-Tach	7393689		1600		2000		2400
	Combination Bucket 190 cm, Quick-Tach	7393687		1200		1600		2000

OPTIONS / ACCESSORIES							
Description	Part Number						
Tooth kit **	7239328						
Reversible cutting edge kit **	7423019						



COMPATIBILITY TABLE SHOWS MAXIMUM ALLOWED MATERIAL DENSITY IN KG/M³ FOR GIVEN COMBINATION OF **BUCKET AND CARRIER**

BUCKET (GP), GENERAL PURPOSE



strength and extend bucket life.

General Purpose Buckets (GP): Have predrilled holes to accept bolt-on cutting edge or bolt-on teeth.

• Round back design enhances bucket loading and cleanout.

Features & Benefits

- Low heel makes cutting grade and backdragging easier.
- Optional reversible cutting edges and teeth.
- Thick side walls with weld-on side cutters to increase
- \bullet Dual level indicators for operators guidance.

Description: General purpose buckets can tackle a variety of applications. These buckets are ideal for light duty and medium duty grading and levelling applications as well as loading, carrying and material handling.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Heaped Capacity (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, General Purpose 190 cm, Bob-Tach™	7427815	190	800	65	9	291	85	80	None
Bucket, General Purpose 200 cm, Bob-Tach™	7484957	200	1000	65	9	333	91	87	None
Bucket, General Purpose 190 cm, Quick-Tach	7369956	190	650	N/A	9	242	77	75	None
Bucket, General Purpose 190 cm, Quick-Tach	7369957	190	800	N/A	9	280	89	79	None
Bucket, General Purpose 200 cm, Quick-Tach	7484956	200	1000	N/A	9	331	91	90	None

COMPATIBILITY CHARTS										
		Compact Wheel Loaders								
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach			
Bucket, General Purpose 190 cm, Bob-Tach™	7427815	1200		1600		2000				
Bucket, General Purpose 200 cm, Bob-Tach™	7484957	950		1200		1600				
Bucket, General Purpose 190 cm, Quick-Tach	7369956		1600		2000		2500			
Bucket, General Purpose 190 cm, Quick-Tach	7369957		1200		1600		2000			
Bucket, General Purpose 200 cm, Quick-Tach	7484956		950		1200		1600			

OPTIONS / ACCESSORIES							
Description	Part Number	Quantity to order					
Tooth kit**	7239328	9					
Reversible cutting edge kit**	7423019	1					



COMPATIBILITY TABLE SHOWS MAXIMUM ALLOWED MATERIAL DENSITY IN KG/M³ FOR GIVEN COMBINATION OF **BUCKET AND CARRIER**

BUCKET, GRAPPLE


Requirements • Reliable design with cylinders protected on the rear • Large welded spill guard • Robust 10 mm high strength steel • Reversible bolt-on edge, bolted flanges and hydraulic hoses included • Bucket Grapple: No special requirement

Description: You can use this durable grapple to move hard-to-handle agricultural materials. The hydraulically-controlled grapple is also easy to operate, fast and close strong. Available with bolton forged teeth (easy to replace and suitable for silage) or with oxycut welded teeth (more durable). Side flanges are bolted and so can be removed easily.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Coupling	Width (cm)	Capacity (I)	Accepts Max. Number of Teeth	Weight (kg)
Bucket, Grapple, Welded, 1900 mm, BT	7461515-BCT	BT	190	1140	7	660
Bucket, Grapple, Forged, 1900 mm, BT	7461516-BCT	BT	190	1125	7	639
Bucket, Grapple, Welded, 1900 mm, QT	7510683	QT	190	1140	7	687
Bucket, Grapple, Forged, 1900 mm, QT	7510684	QT	190	1125	7	664

CO	MPATIBILITY CHARTS							
					Compact Wi	neel Loaders		
	Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach
	Bucket, Grapple, Welded, 1900 mm, BT	7461515-BCT					Х	
6	Bucket, Grapple, Forged, 1900 mm, BT	7461516-BCT					Х	
٦	Bucket, Grapple, Welded, QT	7510683						Х
	Bucket, Grapple, Forged, QT	7510684						X

BUCKET, LIGHT MATERIAL

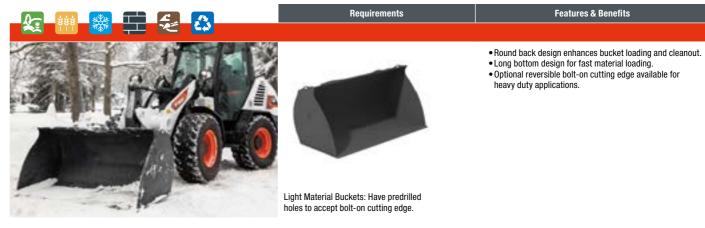

Description: The large volume of Bobcat light material buckets makes them the perfect for loading and handling a variety of lightweight materials, such as mulch, snow or grain.

ECHNICAL SPECIFICATIONS									
Description	Part Number	Width (cm)	Heaped Capacity (I)	Bucket Back Angle (°)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time	
Bucket, Light Material 190 cm, Bob-Tach™	7352445	190	1250	65	347	113	94	None	
Bucket, Light Material 200 cm, Bob-Tach™	7484959	200	1500	65	418	124	99	None	
Bucket, Light Material 190 cm, Quick-Tach	7378882	190	1050	N/A	306	100	90	None	
Bucket, Light Material 190 cm, Quick-Tach	7378883	190	1250	N/A	325	110	93	None	
Bucket, Light Material 200 cm, Quick-Tach	7484958	200	1500	N/A	409	120	100	None	

COMPATIBILITY CHARTS										
		Compact Wheel Loaders								
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach			
Bucket, Light Material 190 cm, Bob-Tach™	7352445	720		950		1100				
Bucket, Light Material 200 cm, Bob-Tach™	7484959			720		950				
Bucket, Light Material 190 cm, Quick-Tach	7378882		950		1100		1400			
Bucket, Light Material 190 cm, Quick-Tach	7378883		720		950		1100			
Bucket, Light Material 200 cm, Quick-Tach	7484958				720		950			

OPTIONS / ACCESSORIES						
Description	Part Number					
Reversible cutting edge kit **	7423019					



2025/2026 **199**** To be ordered through Bobcat Parts

MIXING BUCKET

PALLET FORKS




Description: This rugged, cost-effective attachment lets you mix, transport and pour concrete much quicker than a stand alone mixer. Its compact size makes it ideal for sidewalks, driveways, finish work, footings and floors of small buildings and hard-to-reach or limited access areas.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Capacity (I)	Max. Granular Size (mm)	Average Mixing Time (min.)	Flow Range (I/min)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time	
Mixing Bucket, MB250SD, BT	7185472	153	250	20	4 - 5	45 - 75	370	73	83	None	

COMPATIBILITY CHARTS											
		Compact Wheel Loaders									
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach				
QT/BT Adapter required	7429653				Х		Х				
2 Mixing Bucket, MB250SD, BT	7185472			Х	Х	Х	Х				

** To be ordered through Bobcat Parts

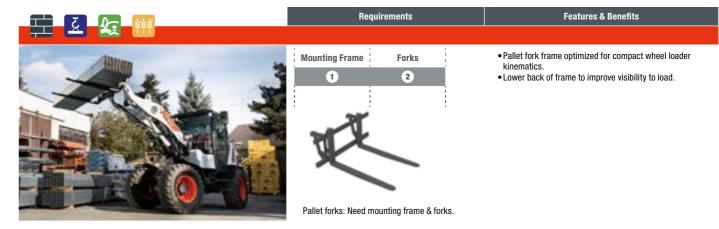

Description: Ideal for handling any kind of bulky or bagged material.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Fork Width (cm)	Frame Weight (kg)	Max. Pallet Fork Frame Rating (kg @ mm)	Control Kit Required	Working Flow	First Use Installation Time				
Pallet Fork Frame, Bob-Tach™	7353072	190	108	2900 @ 600	No	Standard	0.25 h				
Pallet Fork Frame, Quick-Tach	7353071	190	96	2900 @ 600	No	Standard	0.25 h				

CON	COMPATIBILITY CHARTS											
			Compact Wheel Loaders									
	Description N		L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach				
•	Pallet Fork Frame, Bob-Tach™	7353072	Х		Х		Х					
U	Pallet Fork Frame, Quick-Tach	7353071		Χ		Х		X				
2	Pallet Fork Teeth 120 cm (Set of 2)	7353061	Х	Х	Х	Х	Х	X				

200 2025/2026 **201**

PRESSURE WASHER



Description: The Bobcat Pressure Washer is a versatile attachment that can be used to clean and sanitize streets, remove graffitis and even for railroad, bridge or tunnel maintenance. It's dustfree design enables the attachment to be used when laying asphalt, providing a clean surface for bituminous material laying. Designed to spray high pressured water on roads or any kind of surface that needs to be cleaned. Washing handgun with 20 meters hose reel makes cleaning effective and easy.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Sprayer Width (mm)	Maximum Water Pressure (bar)	Max. Water (I/min)	Water Tank Capac- ity (I)	Degree of Sprayer Angle	Operating Weight (kg)	Shipping Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Pressure Washer KC19-250M	7418714	1650	250	30	540	± 20° (hydr. cyl.)	765	225	Yes	Standard	None

COMPATIBILITY CHARTS											
				Compact Wi	neel Loaders						
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach				
Pressure Washer KC19-250M	7418714					Х	Х				

OPTIONS / ACCESSORIES												
Description	Part Number	Max. Pressure Output (bar)	Sand Consumption (kg/h)	Sand Grain Size (mm)	Weight (kg)	First Use Installation Time						
Sand blasting kit	7423360	200	200 - 450	0.2 - 1.4	6	None						



SALT & SAND SPREADER



 Ideal to spread salt and sand but also fertilizers and seeds to work all year round.

Features & Benefits

- Three gates allow you to spread up to 180° and up to 8 m wide.
- Self-loading from a stockpile like a normal bucket with a capacity of 0.33 m³.
 An agitator is located in the hopper to facilitate the flow of
- caked material.
- Large chunks of sand and salt are filtered through the screen at the top of the hopper for even, consistent flow.
- A cab control allows you to regulate the spinner wheel rpm directly from the operator's seat.

Description: Ideal for spreading in confined areas such as parking lots and pedestrian zones where larger equipment cannot be used. Also excellent for spreading fertiliser and seed.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Hopper Capacity Struck (m³)	Hopper Capacity Heaped (m³)	Spreading Pattern	Spinner Wheel Diameter (cm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time	
Salt & Sand Spreader, HS8	7157284	138	0.27	0.33	5.6 m @ 1500 rpm 6.8 m @ 2000 rpm 8.2 m @ 2500 rpm	45	198	No	Standard	None	

COMPATIBILITY CHARTS									
				Compact Wi	neel Loaders				
	Part Number	L75 L85 L85 L95 L95 Bob-Tach™ Quick-Tach Quick-Tach Quick-Tach Quick-Tach Quick-Tach Chim Quick-Tach Quick-Tach Chim Quick-Tach Quick-Tach Chim Quick-Tach Ch							
QT/BT Adapter required	7429653		Х		Х		Х		
2 Salt & Sand Spreader, HS8	7157284	Х	Х	Х	Х	Х	Х		

OPTIONS / ACCESSORIES								
Description	Part Number							
Sidewalk Kit for Spreader, HS8 • Limits the spread pattern to a width of 73 cm or 94 cm, depending on the mounting location used **	7157412							

SNOW BLADE






Description: An excellent way to quickly remove light or moderate snow from sidewalks and driveways. Moldboard angles right or left up to 30°. High visibility masts help locate blade corners.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Working Width (fully angled) (cm)	Cutting Edge (mm)	Cylin- ders	Trip Springs	Optional Rubber Cut- ting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Snow Blade, HD, 244 cm	7207862	244	211	9.5 x 152.4	1	4	25.4 x 152.4	393	No	Standard	0.25 h

COMPATIBILITY CHARTS										
				Compact Wi	neel Loaders					
Description	Part Number	r L75 L85 L85 L95 Bob-Tach™ Quick-Tach Bob-Tach™ Quick-Tach Bob-Tach™ Qu								
1 QT/BT Adapter required	7429653		Х		Х		Х			
2 Snow Blade, HD, 244 cm	7207862	Х	Х	Х	Х	Х	Х			

OPTIONS / ACCESSORIES	
Description	Part Number
Replacement Cutting Edge **	7161165
Wear Edge Kit, Rubber **	6905401
Wear Edge Kit, Poly **	7169617





Wear Edge Kit

SNOW BLOWER





Requirements: QT/BT Adapter. Snow blower, Attachment Control Kit

• Increased intake height and a larger auger draw in more snow for faster removal.

Features & Benefits

- Redesigned, rounded intake minimizes clogging and improves snow flow.
- Aggressive auger teeth easily break up and tear through hard-packed snow and ice.
- Reversible and replaceable wear edge bites into hard ice and packed snow and is designed for long life.
- Adjustable side-mounted and skid shoes allow operators to set the cleaning depth to match the jobsite.
- The truck loading chute allows the snowblower to place snow high in a truck box for easier removal and hauling.

Description: Clear snow off driveways, parking lots and sidewalks with our Bobcat snow blower. The snowblower attachments feature a new and extremely durable direct-drive, sprocket-style chute that operators can rotate to throw snow in virtually any direction and place it wherever the job requires - even hard-to-reach places.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Outside Width (mm)	Hydraulic Motor Package	Auger Diameter (mm)	Fan Diam- eter (mm)	Height (mm)	Side Height (mm)	Flow Range (L/m)	Working Flow	Control Kit Required
Snow Blower 32x80	M7048*5757084	2032	WS 160	508	495	1626	838	106.4-117.3	High	Yes
Snow Blower 32x86	M7049*5653122	2184	WS 160	508	495	1626	838	106.4-117.3	High	Yes

COI	COMPATIBILITY CHARTS												
			Compact Wheel Loaders										
	Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach					
a	Snow Blower 32x80	M7048*5757084			Х	Х	Х	X					
U	Snow Blower 32x86	M7049*5653122			Х	Х	Х	X					

2025/2026 **205** ** To be ordered through Bobcat Parts

SNOW PUSHER



Description: Push snow with speed and efficiency from parking lots, driveways and building sites using the Bobcat Snow Pusher attachment. Available in 2.44 m and 3 m widths size matched to your loader and job.

Features & Benefits

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (cm)	Cutting Edge (mm)	Skid Shoes (mm)	Vertical Float (mm)	Tilt (°)	Oscilla- tion ± (°)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Snow Pusher, 239 cm	7113767	239	38.1 × 203.2	19.1 × 127	58.4	12	4.5	509	No	Standard	None
Snow Pusher, 305 cm	7116164	305	38.1 × 203.2	19.1 × 127	58.4	12	4.5	570	No	Standard	None

CON	COMPATIBILITY CHARTS												
			Compact Wheel Loaders										
	Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach					
0	QT/BT Adapter required	7429653		Х		Х		Х					
2	Snow Pusher, 239 cm	7113767	Х	Х	Х	Х	Х	Х					
2	Snow Pusher, 305 cm	7116164	X	X	X	X	X	X					



SNOW V-BLADE



Description: This versatile, hydraulically operated attachment offers five different blade configurations to help operators move snow fast. The blade has on-the-go fingertip control and angles 30° right or left to continuously push snow to either side of the loader, straight or scoop configuration to push large amounts of snow, or v-configuration to plow through the deepest snow.



TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (cm)	Working Width (Scoop Blade) (cm)	Work- ing Width (Angled 30°) (cm)	Working Width (V- Blade) (cm)	Oscillation (with Flotation Kit) ± (°)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Snow V-Blade, 213 cm	6958577	213	188	190	190	10	385	Yes	Standard	None

COMPATIBILITY CHARTS												
		Compact Wheel Loaders										
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach					
1 QT/BT Adapter required	7429653				Х		Х					
2 Snow V-Blade, 213 cm	6958577			Х	Х	Х	Х					

OPTIONS / ACCESSORIES	
Description	Part Number
Rubber Cutting Edge Kit, 213 cm (Includes hardware) **	6958666

** To be ordered through Bobcat Parts

206 2025/2026 207

SOIL & ASPHALT SPREADER



Description: The Bobcat Soil and Asphalt Spreader is engineered to lay asphalt and other material in order to create sidewalks, widen existing roads or fill trenches saving time and labor.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Stan- dard Width (cm)	Optional Width (cm)	Asphalt Thickness (mm)	Trans- verse Tilt (°)	Side Shift	Average Working Speed (m/min)	Operat- ing Weight (kg)	Required Oil Flow (I/min)	Oil Pres- sure (bar)	First Use Installa- tion Time	
Soil and Asphalt Spreader	7396290	190	196	0 - 100	5	Hydraulic	50 - 120	675	45	250	None	

COMPATIBILITY CHARTS												
		Compact Wheel Loaders										
Description	Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach					
1 QT/BT Adapter required	7429653				Х		Х					
2 Soil and Asphalt Spreader	7396290			Х	Х	Х	Х					

OPTIONS / ACCESSORIES	OPTIONS / ACCESSORIES											
Description	Part Number	Weight (kg)	First Use Installation Time									
External side wing kit	7403712	40	15 min									



SWEEPER



- Cleans in forward or reverse.
- Wear compensation for increased bristle life by patented height adjustment system.

Features & Benefits

- Reversible cutting edge and side protection as standard ensures long product life.
- Standard cutting edge of the sweeper can be used to scrape packed material.
- Motor drain line except SW110.
- Equipped with new heavy duty bristles.
- Optional steel and polyurethane mix bristles.
- Optional gutter brush can be installed to increase
- versatility and increase sweeping width.
- An optional water tank can be fitted on top of the sweeper.

 Spray kit also compatible with existing loaders Water kit.

Description: The Bobcat sweeper can sweep and collect dirt or other debris in both forward and reverse. This attachment is perfect for cleaning parking lots, sidewalks, docks, and warehouses. New features like patented height adjustment placed on the top of the sweeper, double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Max. Flow Range (I/min)	Weight (kg)	Control Kit Required			
Sweeper, 185 cm	7439856	185	0.45	550	PP *	43	60 - 115	467	No			
Sweeper, 185 cm - Steel/PP *	7439856.SP	185	0.45	550	Steel/PP *	43	60 - 115	467	No			
Sweeper, 215 cm	7439857	215	0.52	550	PP *	48	60 - 115	527	No			
Sweeper, 215 cm - Steel/PP *	7439857.SP	215	0.52	550	Steel/PP *	48	60 - 115	527	No			

^{*} Polypropylene

COI	COMPATIBILITY CHARTS									
			Compact Wheel Loaders							
	Description		L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach		
0	QT/BT Adapter required	7429653				Х		Х		
	Sweeper, 185 cm	7439856			Х	Х	Х	Х		
2	Sweeper, 185 cm - Steel/PP	7439856.SP			Х	Х	Χ	Х		
2	Sweeper, 215 cm	7439857			Х	Х	Х	X		
	Sweeper, 215 cm - Steel/PP	7439857.SP			X	X	X	Х		


See Bobcat dealer and OM for specific approval limitation.

SWEEPER, HD OPEN FRAME

OPTIONS / ACCESSORIES							
Description	Part Number	Weight (kg)	First Use Installation Time				
Gutter Brush Right Side	7440928	50	15 min				
Gutter Brush Left Side	7441403	50	15 min				
Water Tank Kit 100 I	7440927 *	40	15 min				
Gutter Brush Hose Extension Kit	7446067	1	5 min				
Harness Extension (Water Kit) ** *	7451570	1	5 min				

^{*} Water Tank Kit includes Nozzle Spray Kit

OPTIONS / ACCESSORIES COMPATIBILITY			
Description	Sweeper 185 cm	Sweeper 215 cm	Pictures
Description	7439856 7439856.SP	7439857 7439857.SP	i iotures
Gutter Brush Right Side	7440928	7440928	
Gutter Brush Left Side	7441403	7441403	W. W. W.
Water Tank Kit	7440927	7440927	
Gutter Brush Hose Extension Kit (for sweepers 185 cm and 215 cm)	7446067	7446067	
Harness extension (Water kit) **	7451570	7451570	

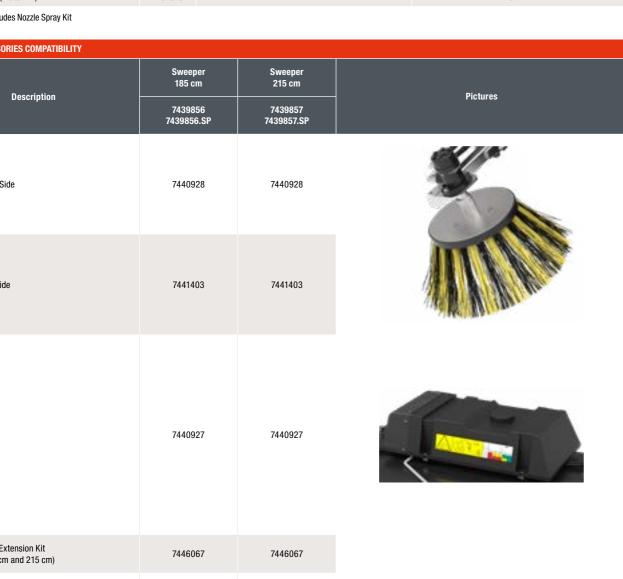





• Cleans in forward or reverse.

- · Heavy duty polyurethane bristles guarantee long product
- Standard cutting edge of the sweeper can be used to scrape packed material.
- Cutting edge and side protection as standard ensures long product life.

Features & Benefits

- Wear compensation for increased bristle life by height
- adjustment system.

 Well protected hydraulic motor will pressure relief valve. Optional gutter brush can be installed to increase
- versatility and increase sweeping width.

 An optional water tank can be fitted on top of the sweeper.

• Spray kit compatible with existing loaders' water kit.

Description: The Bobcat open design sweeper can sweep and collect dirt or other debris in heavy duty applications. The brush is mounted in front of the collection bucket, allowing cleaning in tight industrial places, while guaranteeing the best weight distribution. Vertically angling the sweeper and reversing the flow can be used for material removal without collection in the bucket. This attachment is perfect for cleaning up asphalt and farm grindings. Double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required
HD Open Frame Sweeper, 180 cm	7457918	180	0.195	600	PP *	42 / 39	30 - 50	546	No

^{*} Polypropylene

C	COMPATIBILITY CHARTS									
	Description	Part Number	Compact Wheel Loaders							
			L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach		
•	QT/BT Adapter required	7429653		Χ		Χ		X		
(2	HD Open Frame Sweeper, 180 cm	7457918	Х	Х	Х	Х	Х	X		

OPTIONS / ACCESSORIES							
Description	Part Number	Weight (kg)	First Use Installation Time				
Water Tank Kit 100 l	7468765	33	30 min				
Nozzle Spray Kit	7461924	20	15 min				
Gutter Brush Right Side	7465814	30	30 min				



THE BEST SWEEP PERFORMANCE IS ACHIEVED WITH THE SWEEPER WIDER THAN THE CARRIER, ALSO WHEN THE SWEEPER IS ANGLED, AND AT 6 KM/H TRAVEL SPEED










ATTACHMENT: MULTIPURPOSE SWEEPER

BE PRODUCTIVE AND EFFICIENT WITH THIS MULTIPURPOSE SWEEPER THAT COLLECTS SWEPT UP WASTE

- Achieve the best sweeping results thanks to the multipurpose sweepers' self-levelling system that adapts to the different grounds.
- Clean hangars, stables, or other industrial areas with ease, and for easy collection, all debris is collected in the bucket with the counter-clockwise sweeping.
- **▶** Engineered for heavy-duty applications, thanks to reinforced frames, polyurethane bristles, and added side protection.
- ▶ Choose the sweeper to your carrier: CTL, SSL, CWL, SAL, TLS.

SWEEPER, MULTIPURPOSE

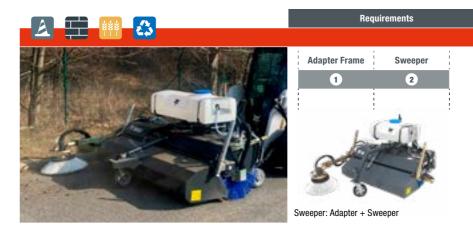

Hydraulic motor with direct drive.

- Adjustable heavy duty polyurethane bristles guarantee long product life. Front hopper opening hydraulically from cab.
 All models manually rotatable +/-20° and hopper lockable in

Features & Benefits

- open position.
 Supported by 3 pivoting wheels.
- Self-leveling system with indicators.
 Carrier interface adapter easily replaceable with dedicated couplers.

 • Mechanical fuse to protect carrier in case of obstacle.
- · Optional gutter brush can be installed to increase versatility and increase sweeping width.
- An optional water tank can be fitted on top of the sweeper.

Description: The Bobcat multipurpose sweeper can sweep and collect dirt or other debris. Floating parallelogram self-levelling system guarantee an ease of operation while getting the job done. Angling the sweeper and reversing the flow allows for material removal without collection on the hopper. Multiple interface adapter easily interchangeable for each carrier. This attachment is

ECHNICAL SPECIFICATIONS 7457927 Multipurpose Sweeper, 180 cm 180 / 169 7457928 Multipurpose Sweeper, 200 cm 200 / 188 0.16 Multipurpose Sweeper, 230 cm 7457929 230 / 216

* Polypropylene

CON	COMPATIBILITY CHARTS									
Description			Compact Wheel Loaders							
		Part Number	L75 Bob-Tach™	L75 Quick-Tach	L85 Bob-Tach™	L85 Quick-Tach	L95 Bob-Tach™	L95 Quick-Tach		
0	Adapter Frame BT for Multipurpose Sweeper 180 cm	7467998	X		X		Х			
	Adapter Frame BT for Multipurpose Sweeper 200 cm - 230 cm	7468000	Х		X		Х			
	Adapter Frame CWL for Multipurpose Sweeper 180cm	7467999		X		X		X		
	Adapter Frame CWL for Multipurpose Sweeper 200 cm - 230 cm	7468001		X		X		X		
2	Multipurpose Sweeper, 180 cm	7457927	X	X	X	X	X	Χ		
	Multipurpose Sweeper, 200 cm	7457928	Х	Χ	Х	Χ	Х	X		
	Multipurpose Sweeper, 230 cm	7457929	X	X	Х	X	X	X		

See Bobcat dealer and OM for specific approval limitation.

OPTIONS / ACCESSORIES							
Description	Part Number	Weight (kg)	First Use Installation Time				
Water Tank Kit 100 I	7461922	33	30 min				
Water Tank Kit 200 I	7460142	48	30 min				
Nozzle Spray Kit for Multipurpose Sweeper 180 cm	7464780	8.5	15 min				
Nozzle Spray Kit for Multipurpose Sweeper 200 cm	7464781	9	15 min				
Nozzle Spray Kit for Multipurpose Sweeper 230 cm	7464782	10	15 min				
Gutter Brush Right Side for Multipurpose Sweeper 180 cm	7468288	40	30 min				
Gutter Brush Left Side for Multipurpose Sweeper 180 cm	7468289	40	30 min				
Gutter Brush Right Side for Multipurpose Sweepers 200 cm - 230 cm	7468291	40	30 min				
Gutter Brush Left Side for Multipurpose Sweepers 200 cm - 230 cm	7468292	40	30 min				




THE BEST SWEEP PERFORMANCE IS ACHIEVED WITH THE SWEEPER WIDER THAN THE CARRIER, ALSO WHEN THE SWEEPER IS ANGLED, AND AT 6 KM/H TRAVEL SPEED

OPTIONS / ACCESSORIES COMPATIBILITY									
Description	Sweeper 180 cm	Sweeper 200 cm	Sweeper 230 cm	Pictures					
	7457927	7457928	7457929						
Water Tank Kit 100 I	7461922	7461922	7461922	\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \					
Water Tank Kit 200 I		7460142	7460142						
Nozzle Spray Kit	7464780	7464781	7464782						
Gutter Brush Right Side	7468288	7468291	7468291						
Gutter Brush Left Side	7468289	7468292	7468292						



FOR BETTER PERFORMANCE, LONG BRISTLE LIFE, AND LOW FUEL CONSUMPTION, SEE THE OPERATOR'S MANUAL FOR RECOMMENDED SETTINGS

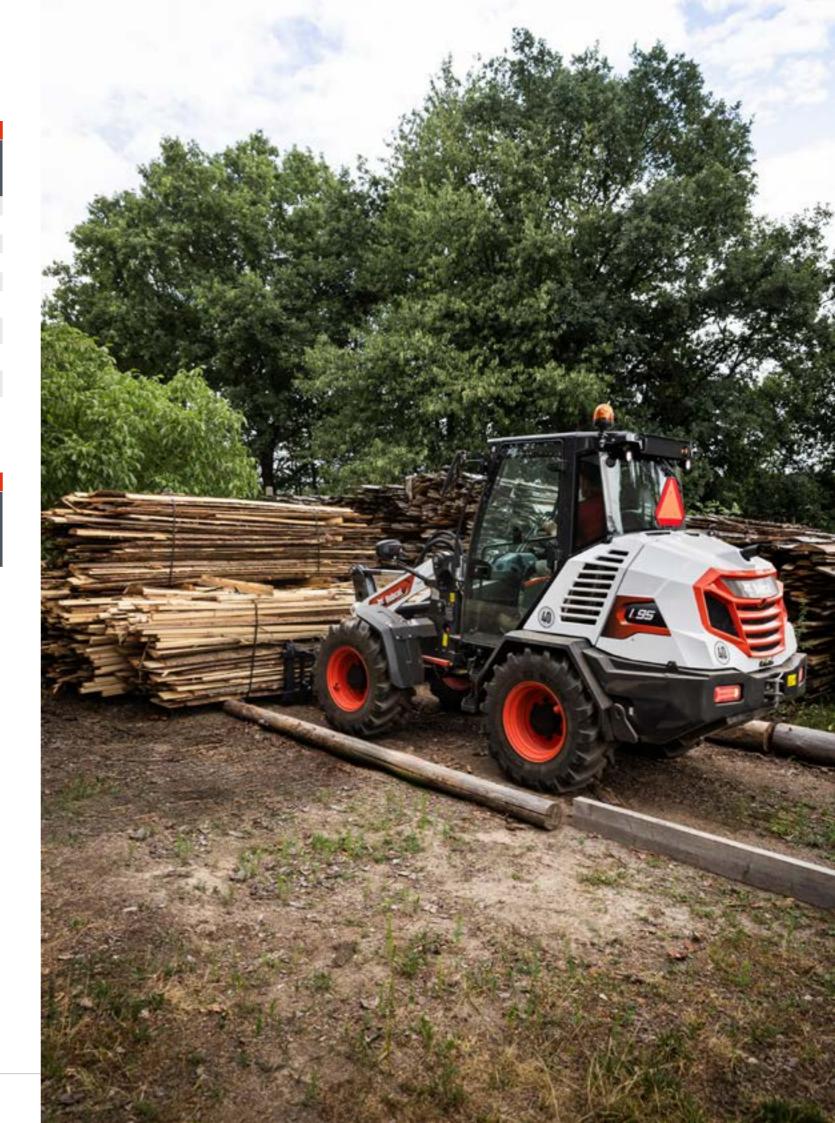





COMPACT TRACTORS

COMPACT TRACTOR
B4501805-EN (01-25)

BACKHOE

BALLAST BOX



Requirements Features & Benefits

- Sub-frame included to attach to the rear of your compact tractor.
- Operates with minimal ground disturbance.
- Clear line of sight, making it easy to dig accurately.

Requirement: Front-End Loader required for application.

Description: Transform your Bobcat Compact Tractor into a powerful, efficient, and versatile excavator with a Bobcat Backhoe. This attachment makes your excavating tractor the perfect partner for landscaping and nursery work, sewage system and spetic tanks, water and power lines and many other jobs.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Digging Depth (mm)	Reach from Center Line of Swing Pivot (mm)	Transport Height (mm)	Stabilizer Spread (Up - Down) (mm)	Bucket Digging Force (daN)	Operating Pressure (bar)	Shipping Weight (kg)
Backhoe BH76	7494360	2281	3076	2114	1636 - 1982	1368	155	558
Backhoe BH86	7494361	2397	3184	2199	1752 - 1862	1571	155	615

COMPATIBILITY CHARTS										
					Co	mpact Tract	ors			
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058
Backhoe BH76	7494360		Х	Х	Х	Х	Х	Х		
Backhoe BH86	7494361								Х	Х

OPTIONS / ACCESSORIES	
Description	Part Number
Lower Link Ball Joints **	6695440



A category 1 3 last box implet
 Rear ballast bot lifting capacity
 Easily removed
 Use a variety of increase lift calls.
 Compact size of the capacity of the

 A category 1 3-point hitch is used to attach your rear ballast box implement to your tractor.

- Rear ballast box is essential when you need maximum lifting capacity for your front-end loader.
- Easily removed when you plan to use other implements.
- Use a variety of materials for the necessary weight to increase lift capacity and traction.

Features & Benefits

Compact size enables convenient storage when not in use.

Requirements: No special requirements.

Description: The rear ballast box protects your tractor from tipping and improves traction by balancing the weight of your tractor. Maximise lifting capacities with this rear ballast box. The 3-point ballast box quickly and easily attaches with connecting pins at each point.

TECHNICAL SPECIFICATIONS Description Part Number (kg) Width (mm) Height 3-Point Hitch Ballast Box, 3-Point 7366584.EA 104 906 716 Category 1

COMPATIBILITY CHARTS										
					Co	mpact Tracto	ors			
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058
Ballast Box, 3-Point	7366584.EA	Х	Х	Х	Х	Х	Х	Х	Х	Х

OPTIONS / ACCESSORIES	
Description	Part Number
Lower Link Ball Joints **	6695440

BOX BLADE





- Heavy-duty, rear-mount with replaceable cutting edges.
 Adjustable and replaceable ripper shanks.

Features & Benefits

- Scarifier allows a maximum working depth of 10 cm.
- Scarmer allows a maximum working depth of 10 cm
 Simply attach it to the 3-point hitch to get started.
- The box blade can be raised or lowered to control the height of the cutting edge.
- Operates in forward or reverse.
- A front ballast box is highly recommended for increased stability during operation.

Requirements: No special requirement

Description: The heavy-duty, rear-mount compact tractor box blade offers impressive versatility for levelling, backfilling, grading and moving a variety of material, including gravel, topsoil, mulch, manure and more. Use it around barns, gardens, buildings, and even roads. Lower the cutting edge to cut, and raise it to dump the material. Double-lug lower hitch points ensure top performance and reliability

TECHNICAL SPECIFICATIONS	TECHNICAL SPECIFICATIONS														
Description	Part Number	Width (mm)	Reversible Cutting Edges (2)	Height (mm)	Length (mm)	Tractor Requirements (hp)	Digging Shanks (Adjustable / Replaceable)	Weight (kg)	Hitch Category						
Box Blade 48, 3-Point	7365520	1270	1219	813	711	26.0 max.	4	163	Category 1						
Box Blade 60, 3-Point	7365525	1562	1524	838	787	60.0 max.	5	189	Category 1						
Box Blade 72, 3-Point	7365527	1867	1829	838	787	60.0 max.	6	215	Category 1						

COMPATIBILITY CHARTS										
					Co	mpact Tract	ors			
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058
Box Blade 48, 3-Point	7365520	Х								
Box Blade 60, 3-Point	7365525		Х	Х	Х	Х	Х	Х		
Box Blade 72, 3-Point	7365527		Χ	Х	Х	Х	Х	Х	Χ	Х

OPTIONS / ACCESSORIES	
Description	Part Number
Lower Link Ball Joints **	6695440












FRONT END LOADER

USE YOUR FRONT-END LOADER IN EVERY SEASON

- The Front-End Loader comes standard with a general-purpose bucket, but you can use it with a variety of Bob-Tach™ attachments.
- Attach and detach to your compact tractor within seconds, depending on the job.
- It is perfect to haul, scoop, grade, dig, and can even be used in more applications!

COMPACT TRACTOR B4501805-EN (01-25)

FRONT-END LOADER

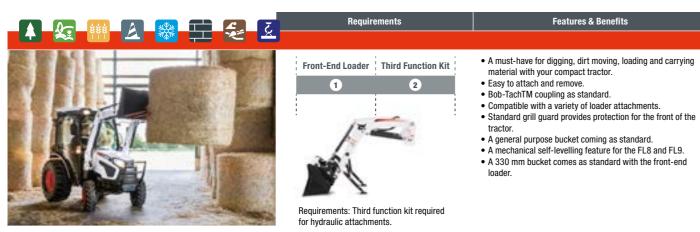

Description: Use your front-end loader in every season to haul, scoop, grade, dig and more. The Bobcat front-end loader is easy to attach and remove, plus it delivers leading lift capacity and height for exceptional productivity.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Max. Lift Height to Pivot Pin (mm)	Max. Dump Angle	Reach with Bucket on Ground (mm))	Max. Rollback Angle	Lift Capacity at Pivot Pin & at Max. Lift Height (kg)	Breakout Force at Pivot Point (kg)	Weight w/ (STD) bucket (kg)	Self- Levelling	Bucket Width (mm)
Front-End Loader FL6	7494338	1826	57°	1336	22°	276	705	271	No	1220
Front-End Loader FL7	7494339	2418	50°	1493	36°	621	1168	331	No	1520
Front-End Loader FL8	7494340	2530	45°	1604	45°	754	1414	405	Mechanical	1520
Front-End Loader FL9	7494341	2641	45°	1750	41°	892	1750	529	Mechanical	1676

COI	IPATIBILITY CHARTS											
			Compact Tractors									
	Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058	
			ပ	ပ	ပ	ပ	ပ	ပ	ပ	ပ		
	Front-End Loader FL6	7494338	Χ									
	Front-End Loader FL7	7494339		Х	Х	Х	Х	Х	Х			
U	Front-End Loader FL8	7494340		Х	Х	Х	Х	Х	Х			
	Front-End Loader FL9	7494341								Χ	X	

COMPATIBILITY CHARTS										
Book Store	Part .	Front-End Loader								
Description	Number	FL6	FL7	FL8	FL9					
Bucket, General Purpose, 127 cm	7114582.EA	X								
Bucket, General Purpose, 142 cm	7114584.EA		X	X						
Bucket, General Purpose, 157 cm	7114585.EA		X	X						
Bucket, Low Profile, 173 cm	6731418.EA			Х	X					
Bucket, Low Profile, 188 cm	6731421.EA				X					
Farm/Utility Grapple on Bucket, 140 cm, 4 Teeth, GP	7176783.EA		Х*	Х*	X*					
Utility Fork, 152 cm, 8 Teeth	6966229.EA	Х	X	Х						
Utility Fork, 168 cm, 9 Teeth	6966231.EA			X	Х					
Utility Fork, 183 cm, 10 Teeth	6966228.EA				X					
Farm/Utility Grapple on Utility Fork, 140 cm, 4 Teeth, C/I	7176977	Х*	Х*	X*	X*					
Pallet Fork Standard Duty	7297499.T		X	X	X					
Pallet Fork Heavy Duty	7294305.T				Х					
Bale Forks, Set of 2	6815781		X	X	Х					
Bucket, Skeleton, 172 cm	7185943			Х	Х					
Bucket, Skeleton, 188 cm	7185945				X					
Snow Blade, 183 cm	6905156			X*	X*					
Snow Blade, 213 cm	6716836				Х*					

^{*} Third-function kit required. To be ordered through parts.

COMPATIBILITY CHARTS										
	Compact Tractors									
Description	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058	
Finish Mower FM150	X	Х	Х	Х	Х	Х	Х			
Finish Mower FM180		Х	Х	Х	Х	Х	Х	Х	X	

MOWER, FINISH



Features & Benefits

- Rear discharge and solid rubber tires are standard and deliver clipping distribution and maneuverability.

- deliver clipping distribution and maneuverability.

 Three cutting blades.
 High blade speeds leave a clean, smooth cut.
 Depth adjustable lower hitches.
 Universal self-balancing 3-point hitch follows the contours of your lawn to reduce scalping.
 Available in 150 and 180 cm cutting widths.
 Easily accessible maintenance points.
 Category 1 3-point Hitch.

Description: Maintain a large lawn and get a professional, well-manicured result in less time. Perfect for regular maintenance of lawns, turf areas, golf courses, and athletic fields. Both models come standard with rear discharge and solid rubber wheels. Blades travel at speeds up to 92.6m per second for a clean, smooth cut without skips in a variety of applications.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Working Width (mm)	Cutting Height (mm)	Blades	Blade Tip Velocity (m/s)	Blade Spindle Speed (rpm)	Weight (kg)	Hitch Category
Finish Mower FM150	7501427	1500	20 - 110	3	75.9	2645	196	Category 1
Finish Mower FM180	7501117	1800	20 - 110	3	76.6	2235	214	Category 1

COMPATIBILITY CHARTS											
	Part Number	Compact Tractors									
Description		CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058	
Finish Mower FM150	7501427	Х	Χ	Х	Х	Χ	Х	Х			
Finish Mower FM180	7501117		Х	Х	Х	Х	Х	Х	Х	Х	

OPTIONS / ACCESSORIES	
Description	Part Number
Lower Link Ball Joints **	6695440





COMPACT TRACTOR B4501805-EN (01-25)

MOWER, MID-MOUNT





- Features three blades and a 135 cm or 150 cm cutting width to make quick work of large lawns.

Features & Benefits

- Standard solid rubber wheels, and side discharge on the
- 2.5 to 10.5 cm height adjustment.
 Powered by the mid-PTO.
 Compatible with the front-end loader.

- Drive over deck functionality for quick assembling for
- M60 model.
- M60 mowers come with a side discharge as standard.

Requirements: Mid-PTO powered 2000 rpm

Description: Turn your compact tractor into a mowing powerhouse. The mid-mount mower enables you to mow large areas with ease using your compact tractor. Cuts grass in areas where maneuverability is tight.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Cutting Width (mm)	Cutting Height (mm)	Blades	Blade Spindle Speed (rpm)	Blade Tip Velocity (m/s)	Blade Length (mm)	Drive- Over	Weight (kg)	Lifting Type
Mid-Mount Mower Deluxe	46886410	1520	27 - 105	3	3000	237	520	No	174	Hydraulic
Mid-Mount Mower M60, with side discharge	7494369	1524	25 - 102	3	2888	78.2	518	Yes	170	3-Point Hitch Links
Mid-Mount Mower M60-5, with side discharge	7494370	1524	25 - 102	3	2888	78.2	518	No	172	3-Point Hitch Links

COL	COMPATIBILITY CHARTS												
			Compact Tractors										
	Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058		
0	Mid-Mount Mower M60, with side discharge	7494369	Х										
2	Mid-Mount Mower M60-5, with side discharge	7494370		Х	X	Х	Х	Х	Х				
0	Mid-Mount Mower Deluxe	46886410	Χ										
	Mower Insert Rear Discharge	46886409	Х										
2	Mower Insert Mulching	46886407	Х										
	Mower Insert Side Discharge	46886406	Х										

OPTIONS / ACCESSORIES						
Description	Part Number					
Quick Change System for MMM Deluxe	46886403					

SNOW BLOWER, REAR





- Easily attaches behind your compact tractor to remove snow while driving in reverse.
- No need to remove your front-end loader.
- · A manual rotating (up to 230 degrees) chute directs snow wherever you want it, to pile it high or throw it far.

Features & Benefits

- The 14-inch auger and four-blade fan are shear-bolt
- protected.
 Skid shoes can be adjusted to scrape surfaces clean or
- set higher to remove snow from gravel lots or driveways. An optional hydraulic chute rotator works great on
- compact tractors with a cab. • A shear bolt driveline protection.
- A front ballast box is highly recommended for increased stability during operation.


Requirements: No special requirement.

Description: Bobcat 3-point snowblowers are perfect for blowing off snow away from concrete or gravel driveways and parking lots. These snowblowers function from the rear PTO and 3-point hitch of the tractor. They are powerful, productive and easy to operate. Chute rotation is achieved by a manual chute rotator that is accessible from the tractor operating station or by an optional hydraulic chute rotator that works great for a compact tractor with a cab. Easily clears paths around acreages or barns.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Working Width (mm)	Snow Intake Height (mm)	Auger Diameter (mm)	Fan Diameter (mm)	Chute Rotation Design	Weight (kg)	3-Point Hitch Size
Rear Snow Blower 125 cm	7366570	1270	549	356	480	Manual/Hydraulic	224	Category 1
Rear Snow Blower 150 cm	7366566	1524	549	356	480	Manual/Hydraulic	240	Category 1
Rear Snow Blower 165 cm	7365785	1676	549	356	480	Manual/Hydraulic	269	Category 1
Rear Snow Blower 185 cm	7365781	1880	549	356	480	Manual/Hydraulic	285	Category 1

COMPATIBILITY CHARTS											
		Compact Tractors									
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058	
Rear Snow Blower 125 cm	7366570	Χ									
Rear Snow Blower 150 cm	7366566		Х	Х	Х	Х	Х	Х			
Rear Snow Blower 165 cm	7365785			Χ	X		Х	Х	X	Х	
Rear Snow Blower 185 cm	7365781								X	X	

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Lower Link Ball Joints **	6695440	-	
Hydraulic Chute Rotation Kit **	7396877	14.5	0.5 h

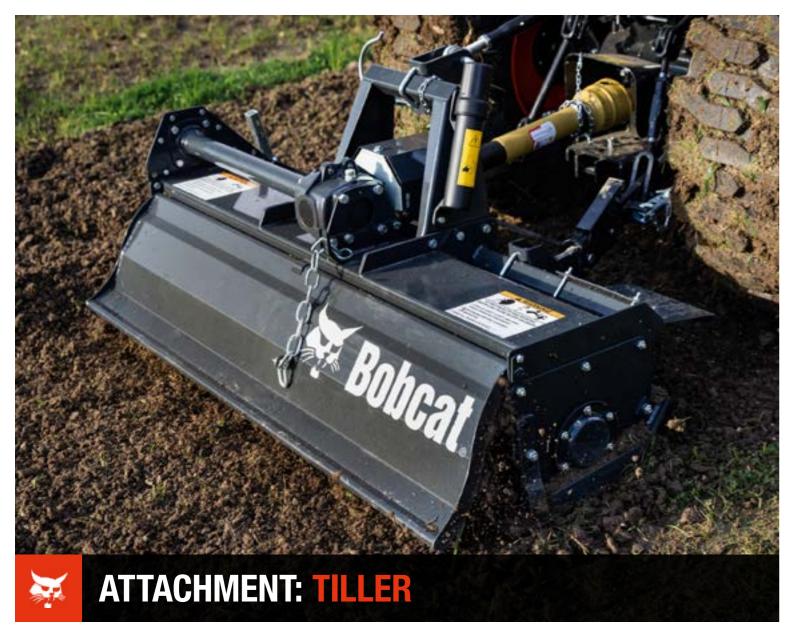

NO JOBSITES CAN STOP THESE TILLERS

- QUICKLY TURN A BACKYARD PLOT INTO A SOIL BED

- Incorporate thick layers of mulch or other fertilizers, thanks to the forward rotating flanges of our tillers.
- ▶ Wide variety of sizes to choose from. Same or larger width recommended than your tractor to guarantee the best results.
- Get the maximum mulching result with the 6 tines per flange on these tillers.
- Integrated slip clutch for long product life.

Learn more on page 229.

MORE INFO ON WWW.BOBCAT.COM







• Built for easy and efficient soil preparation, the 3-point tiller quickly turns a backyard plot into a soil bed.

Features & Benefits

- · Perfect for cultivating, aerating and stirring up soil for gardens, food plots and other tillage needs.
- Adjustable skid shoes support tilling up to 17 cm deep.
- Designed to work close to buildings, fences and trees.
- Category 1 3-point Hitch.
 A front ballast box is highly recommended for increased stability during operation.

Description: A great landscaping attachment. Break ground; prepare soil for planting; amend soil with fertilizer, manure or mulch; and remove weeds between tree rows. Bobcat tiller tines can have a forward or reverse rotation. Use forward rotation to mix loose mulch into the soil, and reverse rotation for application on hard and dry ground, for optimum productivity.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Working Width (mm)	Total Width (mm)	Length (mm)	Driveline	Rotor Speed (rpm)	Number of Rotor Flanges	Tilling Depth (mm)	Weight (kg)
Tiller 120 cm	7504282	1200	1366	1366	Chain-Oil Bath	253	5	157	144
Tiller 145 cm	7504283	1450	1590	1590	Chain-Oil Bath	253	6	157	164
Tiller 150 cm	7504284	1500	1630	1630	Chain-Oil Bath	240	7	157	180
Tiller 165 cm	7501116	1650	1780	1780	Chain-Oil Bath	263	8	172	276
Tiller 185 cm	7501115	1850	1980	1980	Chain-Oil Bath	263	9	172	298
Tiller 165 cm, HD	7504285	1650	1795	1795	Gear Driven-Oil Bath	203 - 287*	8	172	305
Tiller 185 cm, HD	7504286	1850	1995	1995	Gear Driven-Oil Bath	203 - 287*	9	172	330
* Adjustable speed									

COMPATIBILITY CHARTS		Compact Tractors										
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058		
Tiller 120 cm	7504282	Х	Х			Х						
Tiller 145 cm	7504283	Х	Х			Х						
Tiller 150 cm	7504284			Χ			Х					
Tiller 165 cm	7501116			Х	Х		Х	Х	Х			
Tiller 185 cm	7501115			Χ	Χ		Х	X	X			
Tiller 165 cm, HD	7504285								Х	Х		
Tiller 185 cm, HD	7504286								Х	Χ		

OPTIONS / ACCESSORIES							
Description	Part Number						
Lower Link Ball Joints **	6695440						

TINE RAKE





- Simply attach it to the 3-point hitch to get started.
 Rotates a full 360 degrees.
 Has five forward and five reverse angles for easy
- Can be angled or reversed simply by relocating the index



Description: Easily rakes and collects surface debris, such as rocks, roots, and weeds. Good for lawn preparation for reseeding and fertilizing. Exceptionally strong and durable, the rake can be angled or reversed simply by relocating the index pin. Tines are individually replaceable for easy, low-cost maintenance. Put it to work maintaining gravel in parking lots, driveways, or walking trails.


TECHNICAL SPECIFICATIONS										
Description	Part Number	Working Width (mm)	Tines (Curved)	Angling	Weight (kg)	Hitch Category				
Rake 60, 3-Point	7365535	1524	High Carbon (Replaceable)	Manual - 360°	112	Category 1				
Rake 72, 3-Point	7365541	1829	High Carbon (Replaceable)	Manual - 360°	123	Category 1				
Rake 84, 3-Point	7366562	2134	High Carbon (Replaceable)	Manual - 360°	130	Category 1				

COMPATIBILITY CHARTS													
		Compact Tractors											
Description	Part Number	CT1025	CT2025	CT2035	CT2040	CT2525	CT2535	CT2540	CT4050	CT4058			
Rake 60, 3-Point	7365535	Х											
Rake 72, 3-Point	7365541		Х	Х	Х	Х	Х	Х					
Rake 84, 3-Point	7366562		Х	Х	Х	Х	Χ	Х	Х	Х			

OPTIONS / ACCESSORIES	
Description	Part Number
Lower Link Ball Joints **	6695440





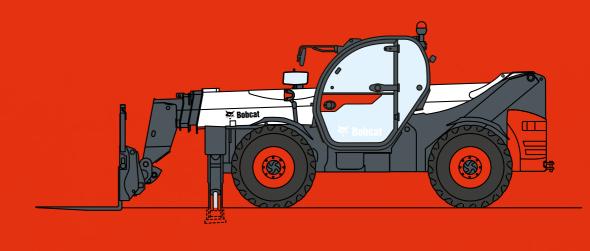

BOBCAT TELEHANDLERS – FAR-REACHING VERSATILITY


QUICK-TACH: CHANGE ATTACHMENTS EASILY, COMFORTABLY AND SAFELY

MANUAL OUICK-TACH

The Quick-Tach is a robust tool-carrier frame allowing you to mount any type of attachment on Bobcat telehandlers. The open shape offers good visibility on the attachment. The light yet robust design saves weight in order to maintain optimum machine capacity. The robust frame is made of thick steel plates, assembled with large transversal tubes, ensuring efficient absorption of shocks during heavy-duty jobs. And the 2 hooks are clearly visible to make mounting the attachment very convenient for the operator.

▶ HYDRAULIC QUICK-TACH

As quick as a snap, you can replace a bucket with pallet forks, a landscape rake, a bale handler, an auger, a grapple and more, thanks to the Bobcat hydraulic Quick-Tach mounting system. This easy yet powerful mounting system allows you to mount and dismount attachments quickly. You can even change non-hydraulic attachments without leaving the cab. The hydraulic Quick-Tach saves time on every job site.

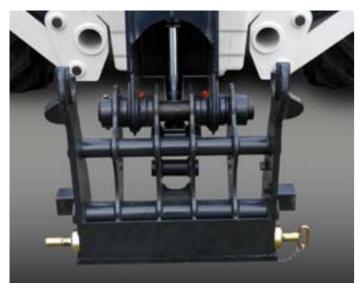



Manual Quick-Tach

Hydraulic Quick-Tach

DUICK COUPLERS (WITH PRESSURE RELEASE)


This unique design ensures that hydraulic attachment changes go quickly and smoothly. Trapped line pressure can make attachment changes anything but quick. So Bobcat telehandlers come with a handy feature to release trapped pressure. By simply pushing the coupler inward, the hydraulic oil is released through a return line back into the machine. The result: clean, quick attachment changes, time after time.





ANGLE BROOM

Features & Benefits

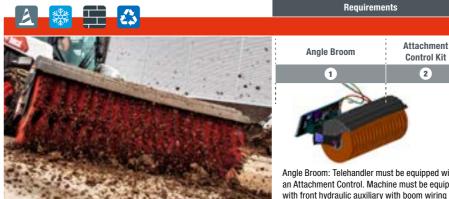

• Sweep flush to a curb or wall on right side.

· Adjust the broom angle with fingertip controls on a cabmounted attachment control kit (sold separately).

High-torque motor for heavy material.

• Proven, replaceable wafer bristles.

Polypropylene bristle material for long life.

Reversible rotation

an Attachment Control. Machine must be equipped with front hydraulic auxiliary with boom wiring harness and ACD Key Pad as factory option.

2

Description: Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farmyards or warehouses, you can depend on the angle broom to get the job done right

TECHNICAL SPECIFICATIONS												
Description	Part Number	Cou- pling System	Sweeping Width (mm)	Sweeping Width Fully Angled (mm)	Brush Diameter (mm)	Number of Bristle Sections (zigzag - straight)	Degree of Angle	Flow Range (I/min)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Angle Broom, Reversible, 213 c (ACD), BT	rm 7337715	ВТ	2134	1956 @ 25°	813	44 - 2	± 25° (hydr. cyl.)	57 - 106	428	Yes	Standard	None

COMPATIBILITY CHARTS														
		Telehandlers												
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP		
Angle Broom, Reversible, 213 cm (ACD), BT	7337715	Х												

OPTIONS / ACCESSORIES								
Description	Part Number							
QT/BT Adapter *	6812846							

^{*} from S/N 004902300 & above



2025/2026 235 ** To be ordered through Bobcat Parts

BALE HANDLER WITH TINES



Features & Benefits





- Frame made of high strength steel for long lasting.
- Reinforced forged tines diam. 25 mm for high stress.
- Delivered with structure, mechanical interface and hose
- Proper hydraulic hose routing to avoid damages.

Bale Handler with Tines: Machine must have

Description: These handlers are designed to transport and load one or two round farm bales (diameters from 1.2 to 1.6 m). To grip the bales firmly, the handler is equipped with two hydraulically operated arms with brackets with 4 forged spikes (prongs) on each side.

TECHNICAL SPECIFICATIONS											
Description	Part Number		Coupling System		Capacity (kg)	Min. Jaw Opening (mm)	Max. Jaw Opening (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
		QT	MT								
Bale Handler w/Tines, Height 1 m, 1.2 m - 1.6 m Diameter, QT	6922897-BCT	X		1300	1000	322	1352	227	No	Standard	None
Bale Handler w/Tines, Height 1.4 m, 1.2 m - 1.6 m Diameter, QT	7175977-BCT	Х		1300	1000	322	1352	241	No	Standard	None

COMPATIBILITY CHARTS													
		Telehandlers											
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
Bale Handler w/Tines, Height 1 m, 1.2 m - 1.6 m Diameter, QT	6922897-BCT		Х	Χ	Х	Х							
Bale Handler w/Tines, Height 1.4 m, 1.2 m - 1.6 m Diameter, QT	7175977-BCT		Х	Χ	х	Х							



BALE HANDLER WITH TUBES



• Frame made of high strength steel for long lasting.

- Strong tubular structure for high stress resistance.
- Delivered with structure, mechanical interface and hose

Features & Benefits

• Proper hydraulic hose routing to avoid damages.

Bale Handler with Tubes: Machine must have front hydraulic auxiliary.

Description: These handlers enable you to transport one or two round, wrapped farm bales with diameters from 1 to 1.8 m. To grip the bales firmly, the handler is equipped with two hydraulically operated arms with round shaped tubes.

TECHNICAL SPECIFICATIONS First Use Kit Re-Description Bale Handler w/Tubes, 1 m - 1.3 m Diameter, QT 6922899-BCT QT 947 800 146 2144 216 Nο Standard Bale Handler w/Tubes, 1.4 m - 1.6 m Diameter, QT 7175823-BCT QT 1076 900 253 2624 265 Standard Bale Handler w/Tubes, 1.6 m - 1.8 m Diameter, QT 7175947-BCT QT 1400 1000 509 3032 295 Standard


COMPATIBILITY CHARTS													
			Telehandlers										
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
Bale Handler w/Tubes, 1 m - 1.3 m Diameter, QT	6922899-BCT		Χ	Χ	X	Х							
Bale Handler w/Tubes, 1.4 m - 1.6 m Diameter, QT	7175823-BCT		Х	Χ	Х	Χ							
Bale Handler w/Tubes, 1.6 m - 1.8 m Diameter, QT	7175947-BCT		Х	Χ	Χ	Χ							

2025/2026 237 ** To be ordered through Bobcat Parts

B4501805-EN (01-25)

BALE SPIKE



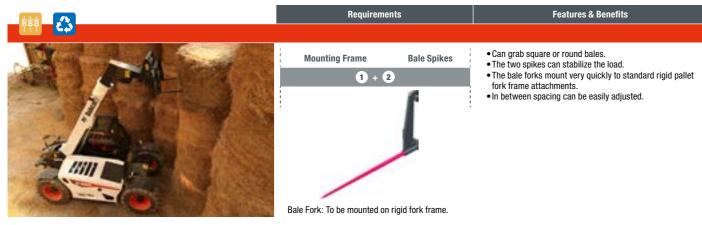

Description: The pair of small-diameter forks gives you advantages over a single spike. They stabilise the load better by balancing round bales and securing uneven bales, making transport and loading easier. This simple attachment is mounted on a rigid pallet fork frame. Designed for bales of 75 cm or 110 cm height.


TECHNICAL SPECIFICATIONS										
Description	Part Coupling Number			Capacity (kg)	Bale Height (mm)	Weight (kg)	Control Kit Required	First Use Installation Time		
		QT	MT							
Rigid Bale Fork (1 piece) for Pallet Fork Frame class III QT and MT	7194871	Х	Х	500	1100	20	No	None		

CO	MPAT	BILITY CHARTS												
								1	Telehandler	S				
		Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
		Fixed Pallet Fork & Frame, 2500 kg, QT	7435217-BCT	Х										
QT	1	Rigid Frame class III for Pallet Fork Frame QT	7194863		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
	2	Rigid Bale Spike (1 piece) for Pallet Fork Frame class III QT and MT	7194871		Х	Х	Х	Х						
мт	0	Rigid Frame class III for Pallet Fork Frame MT	7194867		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
IVII	2	Rigid Bale Spike (1 piece) for Pallet Fork Frame class III QT and MT	7194871		Х	Х	Х	Х						
DT	0	Pallet Fork Frame Heavy Duty, BT	7294305.T	Χ										
ВТ	2	Bale forks, set of 2	6815781	Χ										

OPTIONS / ACCESSORIES								
Description	Part Number							
Rigid Side Shift Carriage 200 mm, class III for Pallet Fork Frame MT	7194870							
Rigid Backrest class II	7512005							
Rigid Backrest class III	7202274							



BOX BLADE

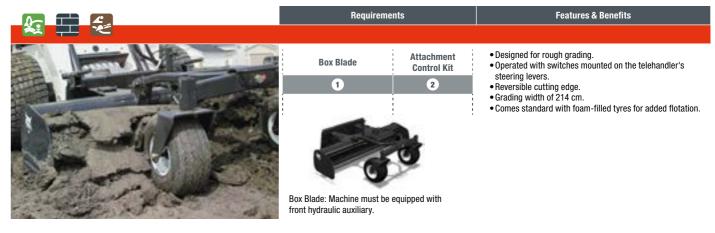

Description: The laser box blade is intended for rough grading and landscaping applications. The heavy duty box blade has a 214 cm grading width and a reversible cutting edge for longer life.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Coupling System	Width (mm)	Blade Width Fully Angled (mm)	Blade Cutting Edge (reversible) (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time	
Box Blade, 214 cm, BT	6906574	ВТ	2140	2134	12.7 × 152	463	No	Standard	0.25 h	

COMPATIBILITY CHARTS												
						T	elehandler	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Box Blade, 214 cm, BT	6906574	Х										

OPTIONS / ACCESSORIES									
Description	Part Number								
QT/BT Adapter *	6812846								

^{*} from S/N 004902300 & above



BRUSHCATTM ROTARY CUTTER





uirements Features & Benefits

 Double-edge blade provides increased blade life by bidirectional cutter rotation (achieved by switching the

- hydraulic hoses at the drive motor).

 Direct hydraulic drive dampens impact loads and eliminates the need for shear pins or drive clutches.
- Front disks allow to better traverse uneven terrain while reducing operator fatigue.
- Floation linkage allows the deck to float over ground contours, keeping it in contact with the surface for optimum performance.
- Floating frame allows oscillation +/- 10 degrees.
- Patented blade shutoff device stops blade rotation when rotary cutter is raised off the ground.

Description: Handle tough brush clearing and landscaping applications easily with the Brushcat™ rotary cutter. This attachment easily cuts through the toughest grass and brush while mulching small branches and saplings up to 7.6 cm in diameter. This tool is ideal for clearing lakefront property, construction sites, power line access roads, trails and ditches.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Coupling System	Cutting Width (mm)	Cutting Height (mm)	Flow Range (I/min)	Tip Speed	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Brushcat™ Rotary Cutter Standard Flow: RC72S, BT	7218087	ВТ	1829	76.2	57.0 - 98.0	50.4 m/sec. @ 57 l/min 87.4 m/sec. @ 98 l/min	680	No	Standard	None

COMPATIBILITY CHARTS												
		Telehandlers										
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Brushcat Rotary Cutter Standard Flow: RC72S, BT	7218087	Х										

OPTIONS / ACCESSORIES									
Description	Part Number								
OT/RT Adaptor *	6912946								

^{*} from S/N 004902300 & above



BUCKET, COMBINATION





Requirements: It is recommended to use a port relief valve 7502313. Machine must have front hydraulic auxiliary.

 Ideal for dozing, grappling, levelling, digging, loading and dumping

Features & Benefits

 Built with heavy-duty cutting edges and protected cylinders for long life.

Description: Dozing, grappling, levelling, digging, loading and dumping. This multi-purpose bucket does it all. Use it on demolition, construction, landscaping and municipal jobs. It's designed to provide optimum digging force and the interlocking serrated grapple edges hold objects securely.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Cou- pling System	Width (cm)	Capacity SAE Heaped (I)	Tooth Type	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	Jaw Opening (cm)	First Use Installa- tion Time
Combination Bucket, 188 cm, BT	7167312	ВТ	188	379	Without Teeth	8	407	88	72	73	2.5 h
Combination Bucket, 203 cm, BT	7167313	ВТ	203	518	Without Teeth	8	487	88	72	73	2.5 h

COMPATIBILITY CHARTS													
	Telehandlers												
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
Combination Bucket, 188 cm, BT	7167312	Χ											
Combination Bucket, 203 cm, BT	7167313	Х											

OPTIONS / ACCESSORIES											
Description	Part Number	Hardware Included	First Use Installation Time								
Bolt-On Teeth Kit, 158 cm - 213 cm, (Set of 8) **	6737322	Yes	1 h								
Hensley Forged Tooth Point (Qty. 1) **	7107317	Yes	-								
Hensley Tiger Tooth Point (Qty. 1) **	7107320	Yes	-								
Hensley Twin Tiger Tooth Point (Qty. 1) **	7107321	Yes	-								
Bolt-On Cutting Edge, 188 cm **	6718007	No	1.5 h								

** To be ordered through Bobcat Parts

BUCKET (CI), CONSTRUCTION / INDUSTRIAL





irements Features & Benefits

- Ideal for everything from tough digging to material handling.
- Good cutting edge visibility.
- Excellent bucket breakout force for better digging and easier bucket filling.

Construction/Industrial Buckets (CI): Have predrilled holes to accept bolt-on cutting

Description: The strongest of all Bobcat buckets. Ideal for everything from tough digging to material handling. Construction / industrial buckets offer good cutting edge visibility and excellent bucket breakout force for better digging and easier bucket filling. Heavy-duty construction / industrial buckets offer even more features required for severe-duty use.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Coupling System	Width (cm)	Capacity SAE Heaped (I)	Bucket Back Angle (°)	Accepts Max. Number of Teeth	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Bucket, C/I, 188 cm, BT	6731409.EA	BT	188	440	70	8	242	81	54	None
Bucket, C/I, 188 cm, Heavy Duty, BT	6732305.EA	BT	188	580	70	8	309	97	61	None

COMPATIBILITY CHARTS												
		Telehandlers										
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Bucket, C/I, 188 cm, BT *	6731409.EA	Х										
Bucket, C/I, 188 cm, Heavy Duty, BT	6732305.EA	Χ										

C/I Bucket 188 cm

7196474 **

6728353

OPTIONS / ACCESSORIES

Bucket Bite Tooth Bar **

Bolt-On Side Guard Kit

Profile. **

Hardware included. Changes C/I Bucket Profile to Utility

Description		
	6731409.EA	6732305.EA
Utility Grapple, 140 cm	7176977	-
Bolt-On Teeth Kit (Set of 8) **	6737322	7107336
Bolt-On Cutting Edge **	6718007	6718007
Spill Guard Kit • Includes two 40 cm Spill Guards and Hardware. Protects tilt cylinders and Bob-Tach™ pivot point area from debris. **	6725979	-
Bucket Spill Guard, Standard • Includes a see through 112 cm Spill Guard and Hardware. Protects the operator, cab, tilt cylinders and Bob-Tach™ pivot area from debris.	7196474 **	-

C/I Bucket 188 cm

6905316

6725980

** To be ordered through Bobcat Parts



Utility Grapple



Bolt-On Tee



Bolt-On Cutting Edge



Bucket Spill Gu



Bucket Bite Tooth Bar



Bolt-On Sid Guard



BUCKET, DIGGING

Features & Benefits




Strong design for better durability.
 Bolt-on teeth as option.
 Good breakout force with a flat-top to provide cutting edge

angle indication.

Description: The extremely durable Bobcat digging bucket is ideal for all types of digging and materials handling jobs. Available with or without teeth.

TECHNICAL SPECIFICATIONS						
Description	Part Number		pling tem	Width (mm)	Capacity (I)	Weight (kg)
		QT	MT			
TLS Digging Bucket w/o teeth, 2150 mm, QT	7254233	Χ		2150	780	415
TLS Digging Bucket w/o teeth, 2365 mm, QT	7188203-BCT	Χ		2365	800	417
TLS Digging Bucket w/ teeth, 2365 mm, QT	7209618-BCT	Χ		2365	800	437
TLS Digging Bucket w/o teeth, 2300 mm, QT	7254236	X		2300	920	442
TLS Digging Bucket w/ teeth, 2300 mm, QT	7254237	X		2300	920	455
TLS Digging Bucket w/o teeth, 2400 mm, QT	7227507	X		2400	950	463
TLS Digging Bucket w/ teeth, 2400 mm, QT	7227685	X		2400	950	482
TLS Digging Bucket w/o teeth, 2365 mm, MT	7190413-BCT		Х	2365	800	405
TLS Digging Bucket w/ teeth, 2365 mm, MT	7209619-BCT		Χ	2365	800	425

^{*} Requires spill guard for operation with TLS. To be ordered via Parts - PN 7196474 **

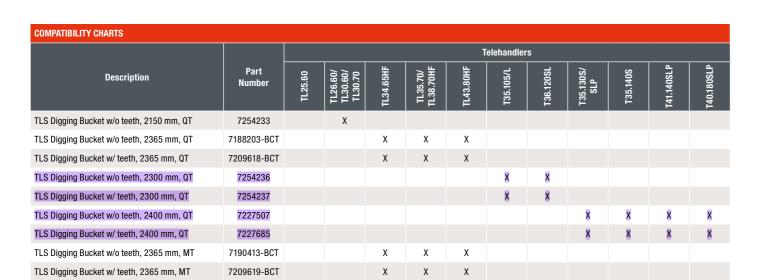


OPTIONS / ACCESSORIES								
Description	Part Number	Weight (kg)						
Teeth kit for 780 I Bucket SD QT	7254376	20						





BUCKET (GP), GENERAL PURPOSE

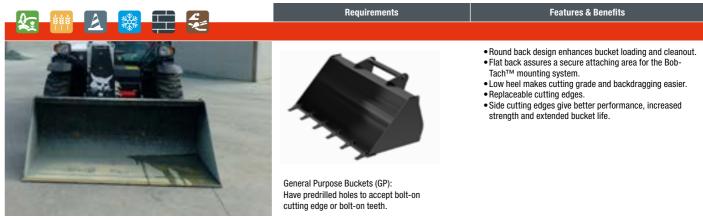

Description: General purpose buckets have a longer bottom. They offer excellent cutting edge visibility and good breakout force. General purpose buckets are ideal for light duty and medium duty grading and levelling applications as well as material handling.


TECHNICAL SPECIFICATIONS										
Description	Part Number	Coupling System		Capacity SAE Heaped (I)	Accepts Max. Number of Teeth	Width (mm)	Height (mm)	Weight (kg)	First Use Installation Time	
		QT	MT	ВТ						
Bucket, General Purpose, 190 cm, QT	7449225-BCT	Χ			800	6	1900	950	355	None
Bucket, General Purpose, 190 cm, MT	7449235-BCT		Χ		800	6	1900	800	346	None
Bucket, General Purpose, 190 cm, BT	7452206-BCT			Х	800	6	1900	700	316	None

COMPATIBILITY CHARTS												
						T	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
General Purpose Bucket, 190 cm, QT	7449225-BCT	Χ										
General Purpose Bucket, 190 cm, MT	7449235-BCT	Х										
General Purpose Bucket, 190 cm, BT	7452206-BCT	Χ										

OPTIONS / ACCESSORIES	
Description	Part Number
Reversible Bolt-On Edge Kit 1.9 m with 20 mm Edge	7499469
6 Teeth Edge Kit 20 mm	7499468

BUCKET, GRAPPLE



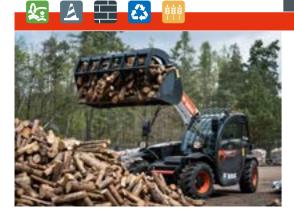

Features & Benefits

- Reliable design with cylinders protected on the rear.

 Large welded spill guard.

 Robust 10 mm high strength steel.

 Reversible bolt-on edge, bolted flanges and hydraulic hoses included.

Bucket Grapple: Machine must have front hydraulic auxiliary.

Description: You can use this durable grapple to move hard-to-handle agricultural materials. The hydraulically-controlled grapple is also easy to operate, fast and close strong. Available with bolton forged teeth (easy to replace and suitable for silage) or with oxycut welded teeth (more durable). Side flanges are bolted and so can be removed easily.

TECHNICAL SPECIFICATIONS									
Description	Part Number	Coupling		Capacity (I)	Teeth	Width (mm)	Working Flow	Weight (kg)	
		QT	ВТ	MT					
Bucket Grapple, Welded, 1900 mm, QT	7461513-BCT	Χ			1140	7	1900	Standard	784
Bucket Grapple, Forged, 1900 mm, QT	7461514-BCT	Χ			1125	7	1900	Standard	691
Bucket Grapple, Welded, 1900 mm, BT	7461515-BCT		Х		1140	7	1900	Standard	660
Bucket Grapple, Forged, 1900 mm, BT	7461516-BCT		Х		1125	7	1900	Standard	639
Bucket Grapple, Ag, Welded, 2200 mm, QT	7322292-BCT	Χ			1160	7	2200	Standard	741
Bucket Grapple, Ag, Forged, 2200 mm, QT	7322296-BCT	Χ			1280	8	2200	Standard	746
Bucket Grapple, Ag, Welded, 2450 mm, QT	7322300-BCT	Χ			1290	8	2450	Standard	784
Bucket Grapple, Ag, Forged, 2450 mm, QT	7322304-BCT	Χ			1420	10	2450	Standard	784
Bucket Grapple, Ag, Welded, 2450 mm, QT	7458960-BCT	Χ			1735	9 + 2	2450	Standard	942
Bucket Grapple, Ag, Forged, 2450 mm, QT	7458961-BCT	Χ			1710	11 + 2	2450	Standard	931
Bucket Grapple, Ag, Welded, 2450 mm, MT	7458962-BCT			Х	1735	9 + 2	2450	Standard	923
Bucket Grapple, Ag, Forged, 2450 mm, MT	7458963-BCT			Х	1710	11 + 2	2450	Standard	902

COMPATIBILITY CHARTS												
						Ī	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Bucket Grapple, Welded, 1900 mm, QT	7461513-BCT	Χ										
Bucket Grapple, Forged, 1900 mm, QT	7461514-BCT	Χ										
Bucket Grapple, Welded, 1900 mm, BT	7461515-BCT	Χ										
Bucket Grapple, Forged, 1900 mm, BT	7461516-BCT	Χ										
Bucket Grapple, Ag, Welded, 2200 mm, QT	7322292-BCT		Х									
Bucket Grapple, Ag, Forged, 2200 mm, QT	7322296-BCT		Х									
Bucket Grapple, Ag, Welded, 2450 mm, QT	7322300-BCT			Χ	Χ	Χ						
Bucket Grapple, Ag, Forged, 2450 mm, QT	7322304-BCT			Χ	Χ	Х						
Bucket Grapple, Ag, Welded, 2450 mm, QT	7458960-BCT			Χ	X	Χ						
Bucket Grapple, Ag, Forged, 2450 mm, QT	7458961-BCT			Χ	X	Χ						
Bucket Grapple, Ag, Welded, 2450 mm, MT	7458962-BCT			Χ	Χ	Χ						
Bucket Grapple, Ag, Forged, 2450 mm, MT	7458963-BCT			Χ	Х	Х						

Bucket Grapple with welded teeth

Bucket Grapple with forged teeth















BRING OUT THE BEST OF YOUR MACHINE IN AGRICULTURAL AND RECYCLING APPLICATIONS

- ▶ These large volume grapple buckets with welded or forged teeth will push your productivity.
- For easy connection, the buckets come with Bobtach, Quicktach or Manitach connection.
- ▶ Robust buckets manufactured in France for longer lifetime and best quality.
- **I** Use these buckets for silage, feed and recycling material handling.

MORE INFO ON WWW.BOBCAT.COM



BUCKET, LIGHT MATERIAL





Convex sides for lower material spilling.
In mm high strength steel for extreme durability.
With reversible bolt-on edge (model depending).

Features & Benefits

Light Material Bucket: No special


Description: The large volume of Bobcat Light Material Buckets is designed for loading and handling a variety of light materials such as mulch, snow and grain.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Coupling	Capacity (I)	Width (mm)	Weight (kg)	With Reversible Bolt-on Edge
Snow & Light Material Bucket, 2240 mm, BT	7184098.EA	ВТ	920	2240	309	Yes *
Snow & Light Material Bucket, 2540 mm, 1530 I, BT	6727787.EA	BT	1540	2540	398	Yes *
Light Material Bucket, 2100 mm, 1500 l, BT	7449239	BT	1500	2100	543	Yes *
Light Material Bucket, 2100 mm, 1500 I, QT BCT	7322001-BCT	QT	1500	2100	539	No
Light Material Bucket, 2300 mm, 2000 I, QT BCT	7321997-BCT	QT	2000	2300	645	No
Light Material Bucket, 2450 mm, 2000 I, QT BCT	7321993-BCT	QT	2000	2450	657	No
Light Material Bucket, 2450 mm, 2500 I, QT BCT	7321989-BCT	QT	2500	2450	747	No
Light Material Bucket, 2450 mm, 3000 I, QT BCT	7320181-BCT	QT	3000	2450	849	No
Light Material Bucket, 2450 mm, 3500 l, QT BCT	7320180-BCT	QT	3500	2450	935	No
Light Material Bucket, 2100 mm, 1500 I, QT BCT, edge	7337841-BCT	QT	1500	2100	579	Yes
Light Material Bucket, 2300 mm, 2000 I, QT BCT, edge	7337835-BCT	QT	2000	2300	689	Yes
Light Material Bucket, 2450 mm, 2000 I, QT BCT, edge	7337831-BCT	QT	2000	2450	705	Yes
Light Material Bucket, 2450 mm, 2500 I, QT BCT, edge	7337826-BCT	QT	2500	2450	795	Yes
Light Material Bucket, 2450 mm, 3000 I, QT BCT, edge	7337807-BCT	QT	3000	2450	897	Yes
Light Material Bucket, 2450 mm, 3500 l, QT BCT, edge	7338630-BCT	QT	3500	2450	983	Yes

* Available through options



BUCKET, SKELETON

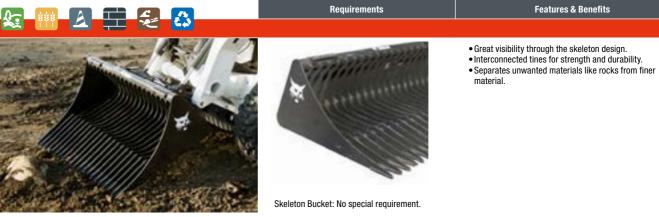

Description: Bobcat skeleton buckets are excellent for separating unwanted objects, such as rocks and other debris, from work areas while leaving finer material behind that can be cultivated or landscaped.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Width (cm)	Number of Tines	Tine Spacing (cm)	Bucket Back Angle (°)	Tine Thick- ness (cm)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Skeleton Bucket, 192 cm, BT	7185945	ВТ	192	21	7,6	70	1	296	120	52	None
Skeleton Bucket, 209 cm, BT	7185947	ВТ	209	23	7,6	70	1	318	120	52	None

COMPATIBILITY CHARTS												
						ī	elehandleı	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Skeleton Bucket, 192 cm, BT	7185945	Χ										
Skeleton Bucket, 209 cm, BT	7185947	Х										

						To	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Snow & Light Material Bucket, 2240 mm, BT	7184098.EA	Χ										
Snow & Light Material Bucket, 2540 mm, 1530 I, BT	6727787.EA	Χ										
Light Material Bucket, 2100 mm, 1500 l, BT	7449239	Χ										
Light Material Bucket, 2100 mm, 1500 I, QT BCT	7322001-BCT	Χ	Х									
Light Material Bucket, 2300 mm, 2000 I, QT BCT	7321997-BCT		Х	Х	Х							
Light Material Bucket, 2450 mm, 2000 I, QT BCT	7321993-BCT			Х	Х							
Light Material Bucket, 2450 mm, 2500 l, QT BCT	7321989-BCT			Х	Х	Х						
Light Material Bucket, 2450 mm, 3000 l, QT BCT	7320181-BCT			Х	Х	Х						
Light Material Bucket, 2450 mm, 3500 l, QT BCT	7320180-BCT					Х						
Light Material Bucket, 2100 mm, 1500 I, QT BCT, edge	7337841-BCT		Х									
Light Material Bucket, 2300 mm, 2000 I, QT BCT, edge	7337835-BCT		Х	Х	Х							
Light Material Bucket, 2450 mm, 2000 I, QT BCT, edge	7337831-BCT			Х	Х							
Light Material Bucket, 2450 mm, 2500 I, QT BCT, edge	7337826-BCT			Х	Х	Х						
Light Material Bucket, 2450 mm, 3000 l, QT BCT, edge	7337807-BCT			Х	Х	Х						
Light Material Bucket, 2450 mm, 3500 l, QT BCT, edge	7338630-BCT					Х						

OPTIONS / ACCESSORIES											
	Compatibility										
Description	7184098.EA 6727787.EA 7449239										
Reversible Bolt-On Edge Kit for 920 I LM BKT **	6715464										
Reversible Bolt-On Edge Kit for 1540 I LM BKT **		6727317									
Reversible Bolt-On Edge Kit 2.1 m with 25 mm Edge			7500452								

250

** To be ordered through Bobcat Parts

B4501805-EN (01-25)

CONCRETE BASKET



Features & Benefits

- Basket is fitted in 3 different ways on normal pallet forks: Left, Front and Right.
- The concrete basket is locked by a chain to the pallet fork frame, for safety reason.
- Reduces damage to turf and underground utilities caused by using large concrete trucks.

Concrete Basket: Use of forks or hook is required. Machine option Hydraulic line on boom is required for hydraulic opening

Description: With our concrete basket attachment, you can quickly pour your concrete wherever you need to. The flexible hose can be easily routed through small openings, under wooden decks, through bushes and around other common obstructions.

TECHNICAL SPECIFICATIONS										
Description	Number			Width (mm)	Capacity (I)	Opening	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
		QT	MT							
Concrete Basket, Hydraulic Opening	7204877	Using	forks	1200	500	Hydraulic	210	No	Standard	None
Concrete Basket, Mechanic Opening	7205332	Using forks		1200	500	Mechanic	176	No	Standard	None

COMPATIBILITY CHARTS												
						1	Telehandler	S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Concrete Basket, Hydraulic Opening	7204877										Χ	Х
Concrete Basket, Mechanic Opening	7205332										Х	Х



FLAIL CUTTER





Flail Cutter: Machine must have front hydraulic auxiliary.

 Variable speed displacement motor allows the flail cutter to be "tuned in" to your machine, depending on its hydraulic capacity. By varying the motor displacement to accept auxiliary hydraulic flows ranging from 64 to 151 I/min, the flail cutter can be operated on many different carriers.

Features & Benefits

- different carriers.

 Floating linkage is standard on the flail cutter. This, along with the attachment's compact deck length, lets the unit follow the contour of the land regardless of the pitch or attitude of the carrier, permitting the cutter up to ten degrees of oscillation.

 Safety compliance The flail cutter complies with the SAE J1001 standard for industrial flail mowers. It is standard-equipped with an authorities but off duries which allows emproyimately tan unches of
- automatic shut-off device which allows approximately ten inches of vertical travel in the Bob-TachTM; mounting system before the flail cutter shuts down.

 • Full width tapered rear roller provides greater turning ability during
- Adjustable rear hatch allows operators to vary the size of discharged material, ranging from small, for mulching applications to coarse for high performance cutting.

Description: The flail cutter is ideal for cutting overgrowth on construction sites as well as alongside roads and sidewalks. It adjusts to follow ground contour.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Cutting Width (mm)	Flow (I/min)	Max. Drum Speed (rpm)	Shut Off Float Height (mm)	Weight (kg)	Number of Ham- mers	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Flail Cutter, FC200, BT	7101894	ВТ	2000	64 - 151	2200	254	746	21	No	Standard	None

COMPATIBILITY CHARTS												
						Т	elehandler	'S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Flail Cutter, FC200, BT	7101894	Χ										

OPTIONS / ACCESSORIES	
Description	Part Number
QT/BT Adapter *	6812846

^{*} from S/N 004902300 & above

FORK GRAPPLE, AGRICULTURAL





- Move hard to handle materials easily.
- Hydraulically controlled grapple is easy to operate.

Features & Benefits

- Handles bulky, uneven loads securely.
- Hose kit included.

Description: Built tough for reliability and endurance, the fork with grapple easily handle scrap, waste, brush and other hard to manage materials.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System		Width (mm)	Capacity (I)	Max. Height with Grapple Raised	Max. Opening with Grapple Raised	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
		QT	MT			(mm)	(mm)				
Fork Grapple, Agricultural, Forged, 2100 mm, QT	7175986	Χ		2100	-	1506	1283	544	No	Standard	None
Fork Grapple, Agricultural, Forged, 2332 mm, QT	7175995-BCT	Χ	Х		-	1506	1283	615	No	Standard	None

COMPATIBILITY CHARTS												
						1	elehandler	'S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Fork Grapple, Agricultural, Forged, 2100 mm, QT	7175986	Χ	Χ									
Fork Grapple, Agricultural, Forged, 2332 mm, QT	7175995-BCT			Χ	Χ	Χ						

GRAPPLE, FARM – UTILITY ON BUCKET



Farm/Utility Grapple: To be attached on bucket. It is recommended to use the port relief valve 7502313. Machine must have front hydraulic auxiliary.

- Move hard to handle materials easily.
- Hydraulically controlled grapple is easy to operate.
- Exclusive Bob-Tach™ mounting system lets you change to another attachment quickly.

Features & Benefits

 Grapple design allows you to get the forks or bucket close to fences or the sides of walls.

Description: This is the easy way to handle loose hay, bedding and manure on the farm and other sites. Use the utility bucket by itself or add the hydraulic grapple for more gripping power.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Cou- pling System	Width (cm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Opening with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Farm/Utility Grapple on Bucket, 140 cm, 4 Teeth, BT, GP	7176783.EA	ВТ	138	1065	4	8	190	770	90	No	Standard	None
Farm/Utility Grapple on Bucket, 140 cm, 4 Teeth, C/I	7176977	ВТ	138	1063	4	8	190	775	90	No	Standard	None

COMPATIBILITY CHARTS													
	Rucket Part Gran							lehandle	rs				
Description	Bucket Part Number	Grapple Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Bucket, GP, 188 cm, BT	7114587.EA	7176783.EA	Χ										
Bucket, CI, 188 cm, BT	6731409.EA	7176977	Χ										

OPTIONS / ACCESSORIES	
Description	Part Number
Port Relief, 275 bar **	7502313

2025/2026 **255**** To be ordered through Bobcat Parts

GRAPPLE, FARM – UTILITY ON FORK

Farm/Utility Grapple: To be attached on forks. It is recommended to use the port

- Move hard to handle materials easily.
- Hydraulically controlled grapple is easy to operate.
- Exclusive Bob-Tach™ mounting system lets you change to another attachment quickly.

Features & Benefits

• Grapple design allows you to get the forks or bucket close to fences or the sides of walls.

relief valve 7502313. Machine must have front hydraulic auxiliary.

Description: This is the easy way to handle loose hay, bedding and manure on the farm and other sites. Use the utility fork by itself or add the hydraulic grapple for more gripping power.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Coupling System	Width (cm)	Max. Height with Grapple Raised (mm)	Standard Number of Teeth	Max. Number of Teeth	Space Between Teeth (mm)	Max. Open- ing with Grapple Raised (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Farm/Utility Grapple on Fork, 140 cm, 4 Teeth, BT, C/I	7176977	ВТ	138	1063	4	8	190	775	90	No	Standard	None

COMPATIBILITY CHARTS													
							Tel	ehandler	s				
Description	Utility Part Number	Grapple Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Utility Fork, 183 cm, 10 Teeth, BT	6966228.EA	7176977	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
Port Relief, 275 bar**	7502313

** To be ordered through Bobcat Parts

GRAPPLE, INDUSTRIAL



- Move hard to handle materials easily.
- Powerful independent grapples (2) secure uneven loads. Hydraulically controlled grapple is easy to operate.

Features & Benefits

· Handles bulky, uneven loads securely.

It is recommended to use the port relief valve 7502313. Machine must have front hydraulic auxiliary.

Description: Built tough for reliability and endurance, the industrial bucket and fork with grapple will easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS	ECHNICAL SPECIFICATIONS														
Description	Part Number	Cou- pling System	Width (cm)	Number of Grapples	Standard Number of Teeth	Max. Number of Teeth	Max. Open Height (cm)	Jaw Opening at Max. Open Height (cm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time			
Grapple, Industrial Bucket, 188 cm, BT	7488345	ВТ	188	2 × 2	-	-	114	98	472	No	Standard	2.5 h			
Grapple, Industrial Bucket, 203 cm, BT	7481680	ВТ	203	2 × 2	-	-	122	96	569	No	Standard	2.5 h			
Grapple, Industrial Fork, 203 cm, BT	7483691	BT	200	2 × 2	8	15	119	93	554	No	Standard	2.5 h			

Industrial Grapple: To be attached on bucket. Includes Bolt-On Cutting Edge.

COI	MPATIBILITY CHARTS												
							T	elehandler	's				
	Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
	Grapple, Industrial Bucket, 188 cm, BT	7488345	Χ										
1	Grapple, Industrial Bucket, 203 cm, BT	7481680	Х										
2	Grapple, Industrial Fork, 203 cm, BT	7483691	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
Port Relief, 275 bar **	7502313

** To be ordered through Bobcat Parts



GRAPPLE, ROOT



Root Grapple: To be attached on bucket. It is recommended to use the port relief valve 7502313. Machine must have front hydraulic auxiliary.

- Heavy duty design improves wear life in tough land clearing and demolition applications.
- Curved tooth design permits material to be picked up without driving teeth into the ground and allows dirt to fall between teeth, leaving dirt on side.

Features & Benefits

- Fully enclosed mounting frame extends wear life by minimising flexing in frame area.
 Inertia-welded cylinder ends a Bobcat exclusive permit strong, smooth, durable grapple operation by improving hydraulic cushioning at the end of the stroke.

 Protected hydraulic hoses limit damage to hoses from dobrie.

Description: Built tough for reliability and endurance, the root grapple can easily handle scrap, waste, brush and other hard-to-manage materials.

TECHNICAL SPECIFICATIONS First Use Installation Description Root Grapple, 183 cm, BT 7488431 Root Grapple, 203 cm, BT 7483226 203 131 111 528

COMPATIBILITY CHARTS												
						1	elehandle:	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Root Grapple, 183 cm, BT	7488431	Χ										
Root Grapple, 203 cm, BT	7483226	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
Port Relief, 275 bar **	7502313

B4501805-EN (01-25)

JIB, CRANE

TELEHANDLERS

JIB, EXTENSION



Features & Benefits

- 2.5 t and 4.3 t capacity.
- Strong design.

 Easy to install thanks to the Quick-Tach system.


 Short center of gravity (only 240 mm).

Crane Jib: No special requirement.

Description: Add a crane jib and your telehandler is turned into a crane, but with all the advantages of its mobility and versatility.

TECHNICAL SPECIFICATIONS	TECHNICAL SPECIFICATIONS													
Description	Part Number	Coup	oling Sy	rstem	Width (mm)	Capacity (kg)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time				
	QT MT		ВТ											
Crane Jib 2.5 t 0.7 m, BT	7449250			Χ	1300	2500	67	No	Standard	None				
Crane Jib 4.3 t 0.7 m, QT	7235647	Х			830	4300	177	No	Standard	None				
Crane Jib 4.3 t 0.7 m, MT	7204108		Χ		830	4300	153	No	Standard	None				

COMPATIBILITY CHARTS												
						ī	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Crane Jib 2.5 t 0.7 m, BT	7449250	Х										
Crane Jib 4.3 t 0.7 m, QT	7235647	Х	Х	Х	Х	Х	Χ	Χ	Х	Х	Х	Х
Crane Jib 4.3 t 0.7 m, MT	7204108	Χ	Х	Χ	Х	Χ			X		Χ	Χ

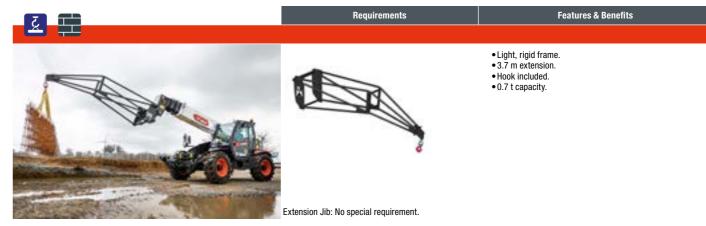

Description: The Bobcat extension jib further increases your lift and reach capacity. Using this attachment, the telehandler can position loads in places which are difficult to access by conventional

TECHNICAL SPECIFICATIONS	TECHNICAL SPECIFICATIONS												
Description	Part Number	Coupling System		Width (mm)	Capacity (kg)	Length (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time			
		QT	QT MT BT										
Extension Jib, 3.7 m with Hook, QT	7238827	Χ	Х			700	3700	204	No	Standard	None		

COMPATIBILITY CHARTS												
						1	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Extension Jib, 3.7 m with Hook, QT	7238827						Χ	Χ	Χ	Χ	X	Χ

LANDPLANE



Features & Benefits

- Allows controlled grading and levelling in both forward and reverse directions.
- Can be used like a bucket to transport material on site.
- Peels and removes sod.
- Scarifier breaks up hard ground.
- Sorts unwanted debris from soil.
 Pulverises soil clods.
- Aerates soil for seeding and sodding.
- Bob-Tach™ mounted.
- · Bidirectional operation.
- Bidirectional scarifier. • Removable screen.
- Landplane: Includes expanded metal grate, scarifier assembly, teeth and respective

Description: A landscaping must. It grades and levels in both forward and reverse and peels and removes sod. The deluxe landplane includes a bidirectional scarifier and removable screen to pulverise soil clods, aerates and sorts debris from soil.

TECHNICAL SPECIFICATIONS													
Description	Part Number	Coupling System	Width (cm)	Digging Depth (cm)	Cutting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time				
Landplane Deluxe, 198 cm, BT	6906115	BT	198	8.9	12.7 × 152	304	No	Standard	None				


COMPATIBILITY CHARTS												
						T	elehandler	'S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Landplane Deluxe, 198 cm, BT	6906115	Х										

OPTIONS / ACCESSORIES		
Descripti	on	Part Number
QT/BT Adapter *		6812846

^{*} from S/N 004902300 & above



LANDSCAPE RAKE

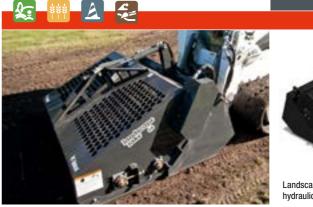



Landscape Rake: Machine must have front hydraulic auxiliary.

- Picks up rocks down to 19 mm and larger, and most 13 mm rocks.
- Hydraulic cylinder opens top cover for easier dumping, and also allows the bucket and cutting edge to be used to push and scrape debris.

Features & Benefits

- Rake bars provide better levelling by providing longer
- ground contact.

 Hardened teeth for longer wear.

 Side skis, which are adjustable, provide depth control and leave only a slight "knife-edge" mark in the finished surface.

Description: The perfect landscape finishing tool. It rakes and collects surface debris as it smoothes and levels the soil. Picks up rocks 19 mm and larger, as well as most 13 mm rocks. Adjustable side skis provide depth control.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Coupling System	Working Width (cm)	Number of Tooth Bars	Total Number of Teeth	Bucket Capacity (I)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time		
Landscape Rake, 6B, BT	6710630	BT	183	12	468	400	560	No	Standard	None		

COMPATIBILITY CHARTS	COMPATIBILITY CHARTS												
Telehandlers													
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
Landscape Rake, 6B, BT	6710630	Х											

OPTIONS / ACCESSORIES	
Description	Part Number
QT/BT Adapter *	6812846

^{*} from S/N 004902300 & above



ALWAYS USE THE LANDSCAPE RAKE GOING IN REVERSE. BEWARE THAT THE GROUND SHOULD NEITHER BE DRY NOR **TOO WET FOR OPTIMUM PERFORMANCE**

MAN PLATFORM, EXTENDABLE ROTATING





Features & Benefits

- Hydraulically extendable from 2.4 m to 4 m.
- Hydraulically rotate up to 90° in both directions.
- Boom, extension and rotation remotly controlled from
- 3 people max.
- 300 kg or 800 kg lift capacity max. (including people).

not retrofittable in the field). Radio remote control is required to operate the platform.

Description: The Bobcat man platform gives you great flexibility in your work as it eliminates the need for scaffolding and safety nets while simplifying and speeding up the job. Bobcat man platforms are fully homologated and easily fitted to your machine without roll-up cables, thanks to the wireless remote control.

Man Platform: Machine HAS to be ordered

with the "Man platform ready" option (option

TECHNICAL SPECIFICATIONS												
Description	Part Number		pling stem	Width (mm)	Capacity (kg)	Max. Persons	Rotation	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time	
		QT	MT									
Man Platform, 2.4 - 4 m, Hyd. Extension, 300 kg, Rotating, QT	7242499	Х		2400 - 4000	300	3	90° Right/Left	775	No	Standard	None	
Man Platform, 2.4 - 4 m, Hyd. Extension, 800 kg, Rotating, QT	7232792	Х		2400 - 4000	800	3	90° Right/Left	970	No	Standard	None	


COMPATIBILITY CHARTS												
						1	Telehandlers					
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Man Platform, 2.4 - 4 m, Hyd. Extension, 300 kg, Rotating, QT	7242499										Х	Х
Man Platform, 2.4 - 4 m, Hyd. Extension, 800 kg, Rotating, QT	7232792										Χ	Х

OPTIONS / ACCESSORIES	
Description	Part Number
Previous Man platform Adapter kit (to use previous man platforms with the T41.140SLP and T40.180SLP Rotating man platform (4 m²) from S/N A6SH00101 & above and Fixed man platform (1 m²) from S/N 00101 & above)	7244480
Remote Control for machine with Stage IIIB	7259887 **
Remote Control for machine with Stage IIIA, Stage IV and Stage V engine	7268200 **

** To be ordered through Bobcat Parts



MAN PLATFORM, FIXED

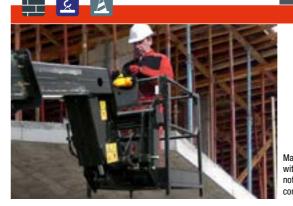



Man Platform: Machine HAS to be ordered with the "Man platform ready" option (option not retrofittable in the field). Radio remote control is required to operate the platform.

- Fixed (no rotation).
- · Made of galavanised steel.
- Allows you to access any kind of work space quickly and

Features & Benefits

- 2 people with max. 60 kg tools.
- 220 kg lift capacity max. (including person).

Description: The Bobcat man platform gives you great flexibility in your work as it eliminates the need for scaffolding and safety nets while simplifying and speeding up the job. Bobcat man platforms are fully homologated and easily fitted to your machine without roll-up cables, thanks to the wireless remote control.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Coupling System		Width (mm)	Capacity (kg)	Max. Persons	Rotation	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time	
		QT	MT									
Man Platform, 1 m², 220 kg, Fixed, QT	7235885	Χ		1020	220	2	No	148	No	Standard	None	

COMPATIBILITY CHARTS												
		Telehandlers										
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34,65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Man Platform, 1 m², 220 kg, Fixed, QT	7235885										Х	Х

UPTIONS / ACCESSORIES	
Description	Part Number
Previous Man platform Adapter kit (to use previous man platforms with the T41.140SLP and T40.180SLP Rotating man platform (4 m²) from S/N A6SH00101 & above and Fixed man platform (1 m²) from S/N 00101 & above)	7244480
Remote Control for machine with Stage IIIB	7259887 **
Remote Control for machine with Stage IIIA, Stage IV and Stage V engine	7268200 **

2025/2026 **265** ** To be ordered through Bobcat Parts

MAN PLATFORM, ROTATING





Requirements Features & Benefits

- Hydraulically rotate up to 90° in both directions.
- Boom and rotation remotly controlled from basket.
- 3 people max.
- 300 kg lift capacity max. (including people).



Man Platform: Machine HAS to be ordered with the "Man platform ready" option (option not retrofittable in the field). Radio remote control is required to operate the platform.

Description: The Bobcat man platform gives you great flexibility in your work as it eliminates the need for scaffolding and safety nets while simplifying and speeding up the job. Bobcat man platforms are fully homologated and easily fitted to your machine without roll-up cables, thanks to the wireless remote control.

TECHNICAL SPECIFICATIONS												
Description Part Number		Coupling System		Width (mm)	Capacity (kg)	Max. Persons	Rotation	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time	
		QT	MT									
Man Platform, 2.2 m, 300 kg, Rotating, QT	7246529	Х		2200	300	3	90° Right/Left	655	No	Standard	None	

COMPATIBILITY CHARTS	COMPATIBILITY CHARTS												
		Telehandlers											
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
Man Platform, 2.2 m, 300 kg, Rotating, QT	7246529										Х	Χ	

OPTIONS / ACCESSORIES	
Description	Part Number
Previous Man platform Adapter kit (to use previous man platforms with the T41.140SLP and T40.180SLP Rotating man platform (4 m²) from S/N A6SH00101 & above and Fixed man platform (1 m²) from S/N 00101 & above)	7244480
Remote Control for machine with Stage IIIB	7259887 **
Remote Control for machine with Stage IIIA, Stage IV and Stage V engine	7268200 **

** To be ordered through Bobcat Parts



MIXING BUCKET: GREAT AID TO OPERATORS IN CONSTRUCTION AND ROAD WORK APPLICATIONS

- Mix, transport, and pour concrete much quicker with these three models of mixing bucket.
- It is a rugged, cost-effective attachment, increasing your efficiency.
- ▶ The compact sizes of the buckets, and the TL25.60 allow you to work in hard-to-reach places.
- ldeal to work along sidewalks, driveways, do finish work, footings or even floors.

MORE INFO ON WWW.BOBCAT.COM

MIXING BUCKET

PALLET FORKS, FIXED

Features & Benefits



Features & Benefits


- Side discharge system.
 Mix and dump functions are fingertip controlled.
- Mix while driving.

Mixing Bucket: Machine must have front

Description: This rugged, cost-effective attachment lets you mix, transport, and pour concrete much quicker than a stand alone mixer. Its compact size makes it ideal for sidewalks, driveways, finish work, footings and floors of small buildings and hard-to-reach or limited access areas.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Width (cm)	Capacity (I)	Max. Granular Size (mm)	Average Mixing Time (min.)	Flow Range (I/min)	Weight (kg)	Length (cm)	Height (cm)	First Use Installation Time
Mixing Bucket, MB250SD, BT	7185472	ВТ	153	250	20	04 - 05	45 - 75	370	73	83	None
Mixing Bucket, MB500SD, BT	7449274	ВТ	165	500	20 - 30	04 - 05	60 - 70	526	102	88	None
Mixing Bucket, MB500SD, QT	7449268	QT	165	500	20 - 30	04 - 05	60 - 70	608	102	92	None

COMPATIBILITY CHARTS												
						T	elehandler	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Mixing Bucket, MB250SD, BT	7185472	Х										
Mixing Bucket, MB500SD, BT	7449274	Х										
Mixing Bucket, MB500SD, QT	7499268	Χ										

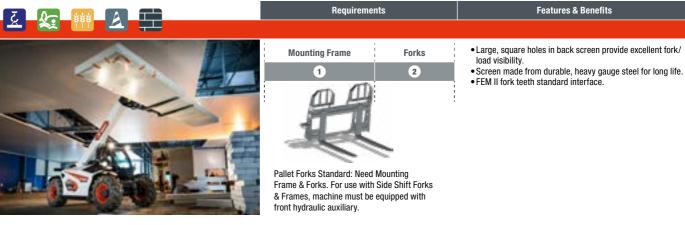

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles.

TEC	HNICAL SPECIFICATIONS												
	Description	Part Number		Coupling System		Fork Width (cm)	Capacity (kg)	Fork Length (mm)	Fork Width (mm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
			QT	MT	ВТ								
	Fixed Pallet Fork & Frame, 2500 kg, QT	7435217-BCT	Х			1175	2500	-	100	236	No	Standard	0.25 h
	Fixed Pallet Fork & Frame, 2500 kg, MT	7435218-BCT		Х		1175	2500	-	100	216	No	Standard	0.25 h
0	Pallet Fork Frame, Severe Duty, BT	7294332.T			Χ	1308	2500	-	100	212	No	Standard	0.25 h
	Fixed Pallet Fork & Frame, w/ Side Shift, 2500 kg, BT $$	7435219			Χ	1200	2400	-	100	350	No	Standard	0.5 h
	Fixed Pallet Fork & Frame, w/ Side Shift, 2500 kg, QT	7455259	Χ			1200	2500	-	100	362	No	Standard	0.5 h
	Pallet Fork Teeth, 122 cm, Severe Duty, Class 2 (Set of 2), BT	6541518			Х	-	-	1219	100	109	No	Standard	0.25 h
2	Pallet Fork Teeth 1 m (Set of 2) QT & MT	7436096	Χ	Χ		-	-	1000	100	90	No	Standard	0.25 h
	Pallet Fork Teeth 1.2 m (Set of 2) QT & MT	7436095	Х	Х		-	-	1200	100	103	No	Standard	0.25 h
	Rigid Pallet Fork & Frame, QT	7204268	Х			1220	4000	1200	100	300	No	Standard	None
	Rigid Pallet Fork & Frame, QT, w/ Backrest	7204269	Х			1257	4000	1200	100	325	No	Standard	None
	Rigid Pallet Fork & Frame, QT, w/ Side Shift	7204270	Х			1220	3500	1200	100	380	No	Standard	None
0	Rigid Pallet Fork & Frame, QT, w/ Backrest, w/ Side Shift	7204271	Х			1257	3500	1200	100	405	No	Standard	None
2	Rigid Pallet Fork & Frame, MT	7204527		Χ		1220	4000	1200	100	271	No	Standard	None
	Rigid Pallet Fork & Frame, MT, w/ Backrest	7204528		Х		1257	4000	1200	100	295	No	Standard	None
	Rigid Pallet Fork & Frame, MT, w/ Side Shift	7204529		Х		1220	3500	1200	100	351	No	Standard	None
	Rigid Pallet Fork & Frame, MT, w/ Backrest, w/ Side Shift	7204530		Х		1257	3500	1200	100	376	No	Standard	None

2025/2026 **269** ** To be ordered through Bobcat Parts



PALLET FORK, FLOATING



Rigid pallet forks with Side Shift and Backrest

COI							-	و الدو و و او او					
								elehandler	's				
	Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
	Fixed Pallet Fork & Frame, 2500 kg, QT	7435217-BCT	Χ										
	Fixed Pallet Fork & Frame, 2500 kg, MT	7435218-BCT	Х										
1	Pallet Fork Frame, Severe Duty, BT	7294332.T	Х										
	Fixed Pallet Fork & Frame, w/ Side Shift, 2500 kg, BT	7435219	Х*										
	Fixed Pallet Fork & Frame, w/ Side Shift, 2500 kg, QT	7455259	Х*										
	Pallet Fork Teeth, 122 cm, Severe Duty, Class 2 (Set of 2), BT	6541518	Х										
2	Pallet Fork Teeth 1 m (Set of 2) QT & MT	7436096	Х										
	Pallet Fork Teeth 1.2 m (Set of 2) QT & MT	7436095	Х										
	Rigid Pallet Fork & Frame, QT	7204268		Х	Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	Rigid Pallet Fork & Frame, QT, w/ Backrest	7204269		Х	Х	Х	Χ	Χ	Х	Х	Х	Х	Х
	Rigid Pallet Fork & Frame, QT, w/ Side Shift	7204270		Х	Χ	X	Χ						
0	Rigid Pallet Fork & Frame, QT, w/ Backrest, w/ Side Shift	7204271		Х	Х	Х	Χ						
† 2	Rigid Pallet Fork & Frame, MT	7204527		Х	Х	Х	Χ	Х	Х	Χ	Х	Χ	Χ
	Rigid Pallet Fork & Frame, MT, w/ Backrest	7204528		Х	Χ	Х	Χ	Х	Χ	Х	Χ	Х	Х
	Rigid Pallet Fork & Frame, MT, w/ Side Shift	7204529		Х	Х	Χ	Χ						
	Rigid Pallet Fork & Frame, MT, w/ Backrest, w/ Side Shift	7204530		Х	Х	Х	Х						

^{*} Machine must have front hydraulic auxiliary

OPTIONS / ACCESSORIES									
Description	Pallet Fork Frame SD BT	Fixed Pallet Fork & Frame, w/ SS		Rigid P			Fork & Frame IT		
	7294332.T	7435219	7455259	7204268	7204269	7204270	7204271	7204528	7204530
Brick-Guard Center	7306978	7306978							
Brick-Guard Extension	7306981	7306981							
Rigid Fork Frame FEM III				7194863	7194863	7194863	7194863	7194863	7194863
Rigid Side Shift Carriage, 200 mm, Class III				7194870	7194870	7194870	7194870	7194870	7194870
Rigid Side Shift Carriage, 200 mm, FEM II		7455268	7455268						
Rigid Bale Spike Class III (1 piece)				7194871	7194871	7194871	7194871	7194871	7194871
Rigid Backrest Class II and III **					7202274		7202274	7202274	7202274



 Floating forks are free to swing while remaining level with the ground.

Features & Benefits

 Simplifies getting the fork tines into the pallet openings without having to adjust the tilt angle and height as much as with fixed forks.
 Comes as standard with forks and backrest (except for

 Comes as standard with forks and backrest (except f forks with JCB coupling).

Description: Use this versatile attachment to lift, carry, stack or place all types of pallet materials even on rough and uneven surfaces in construction sites, municipal projects, industrial areas and farms. Floating forks are free to swing while always remaining level with the ground, to avoid load spillage. Bobcat also offers you the choice of two frame widths – 1.0 m or 1.5 m – to suit your needs.

Forks

2

TECHNICAL SPECIFICATIONS Part Number Capacity (kg) Frame Width Fork Length Fork Width MT ВТ JCB 1) Pallet Frame, Floating /1.2 m wide/BT/Class II 7140717 1270 2722 1219 100 223 2 Pallet Forks, Floating /BT (pair of two) 6810302 1219 117 100 Pallet Forks, Floating /1.0 m wide/Forks included/ 7361568 1050 4300 1200 100 254 Pallet Forks, Floating /1.5 m wide/Forks included/ 7361564 Х 1500 4300 1200 100 273 1 QT/Class III Pallet Forks, Floating /1.0 m wide/Forks included/ 7367561 1050 4300 1200 100 248 MT/Class III Pallet Forks, Floating /1.5 m wide/Forks included/ 7367562 1500 4300 100 268 1200 MT/Class III Floating Pallet Forks, 1.33 m, JCB Q-fit 7342200 1330 4300 1200 100 150

COI	MPATIBILITY CHARTS													
								Telehan	dlers					
	Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
0	Pallet Frame, Floating /1.2 m wide/BT/Class II	7140717	Χ	Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
2	Pallet Forks, Floating /BT (pair of two)	6810302	Х											
	Pallet Forks, Floating /1.0 m wide/Forks included/ QT/Class III	7361568	Х	Х	X	Х	Х	Х	Χ	Х	Х	Х	Х	Х
0	Pallet Forks, Floating /1.5 m wide/Forks included/ QT/Class III	7361564	Х	Х	Х	Х	Х	Х	Χ	X	Х	Х	Х	Х
+	Pallet Forks, Floating /1.0 m wide/Forks included/ MT/Class III	7367561	Χ	Х	Х	Χ	Х	Х	Χ	Х	Х	Х	Х	Х
	Pallet Forks, Floating /1.5 m wide/Forks included/ MT/Class III	7367562			Х		Х	Х	Χ	Х	Х	Х	Х	Х
	Floating Pallet Forks, 1.33 m, JCB Q-fit	7342200	Χ											

270 2025/2026 271 ** To be ordered through Bobcat Parts

PALLET FORKS, HYDRAULIC

• Large, square holes in back screen provide excellent fork/ load visibility.

• Screen made from durable, heavy gauge steel for long life. • Hydraulic Pallet Fork Positioner Attachment is available for easier handling of varying pallet sizes without leaving the operator's seat.

Features & Benefits

Frame and 2 hydraulically adjustable teeth.

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Coupling System	Fork Length (cm)	Fork Width (mm)	Frame Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Pallet Fork Frame, Hydraulic, 122 cm, BT	6905425	BT	122	100	35	No	Standard	None

COMPATIBILITY CHARTS												
						T	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Pallet Fork Frame, Hydraulic, 122 cm, BT	6905425	Х										

PRESSURE WASHER



• Plug & Play enables the operator to connect the attachments to the machine within seconds. • Compact design for working in tight spaces and ease of

Hydraulically adjustable front sprayer helps to adapt to all

street conditions.
• Floating front wheel allows the Pressure Washer to work smoothly and faster.

 High Pressure Pump - No rotating parts makes it durable and low maintenance.

Features & Benefits

• Washing handgun with 20 meters hose reel.

• Dustfree cleaning before laying bituminous material.

Description: The Bobcat Pressure Washer is a versatile attachment that can be used to clean and sanitize streets, remove graffitis and even for railroad, bridge or tunnel maintenance. It's dustfree design enables the attachment to be used when laying asphalt, providing a clean surface for bituminous material laying. Designed to spray high pressured water on roads or any kind of surface that needs to be cleaned. Washing handgun with 20 meters hose reel makes cleaning effective and easy.

Attachment

Control Kit

2

TECHNICAL SPECIFICATIONS Water Kit Re-± 20° Pressure Washer KC19-250L, BT 7418715 BT 1650 250 810 1071 261 Standard (hydr. cyl.)


COMPATIBILITY CHARTS												
						T	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Pressure Washer KC19-250L, BT	7418715	Х										

OPTIONS / ACCESSORIES						
Description	Part Number	Max. Pressure Output (bar)	Sand Consumption (kg/h)	Sand Grain Size (mm)	Weight (kg)	First Use Installation Time
Sand blasting kit	7423360	200	200 - 450	0.2 - 1.4	6	None

2025/2026 273 ** To be ordered through Bobcat Parts

SALT & SAND SPREADER

SNOW BLADE

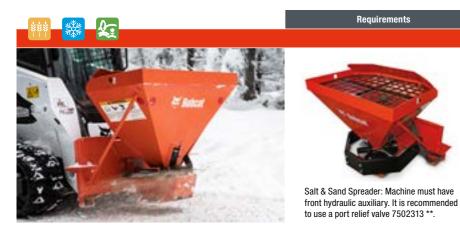

• Ideal to spread salt and sand but also fertilizers and seeds to work all year round. • Three gates allow you spread up to 180° and up to 8 m

Self-loading from a stockpile like a normal bucket with a capacity of 0.33 m³.

 An agitator is located in the hopper to facilitate the flow of

Features & Benefits

caked material.

 Large chunks of sand and salt are filtered through the screen at the top of the hopper for even, consistent flow.

• A cab control allows you to regulate the spinner wheel rpm directly from the operator's seat.

Description: Ideal for spreading in confined areas such as parking lots and pedestrian zones where larger equipment cannot be used. Also excellent for spreading fertiliser and seed.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Width (cm)	Hopper Capacity Struck (m³)	Hopper Capacity Heaped (m³)	Spreading Pattern	Spinner Wheel Diameter (cm)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installation Time
Salt & Sand Spreader, HS8, BT	7157284	ВТ	138	0.27	0.33	5.6 m @ 1500 rpm 6.8 m @ 2000 rpm 8.2 m @ 2500 rpm	45	198	No	Standard	None

COMPATIBILITY CHARTS												
						1	Telehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Salt & Sand Spreader, HS8, BT	7157284	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
Sidewalk Kit for Spreader, HS8 • Limits the spread pattern to a width of 73 cm or 94 cm, depending on the mounting location used **	7157412



Snow Blade: Included hydraulic angle. Machine must have front hydraulic auxiliary.

- Snow blades angle 30 degrees to either side, using powerful
- hydraulic cylinders, to help move snow where you want it.
- The blade angle is adjusted from the cab using fingertip controls.
 Moldboard has spring trip for component protection in case of

Features & Benefits

- hitting a side walk or large stone.
- Adjustable depth shoes are standard equipment.
 High visibility masts provided to locate blade corners for better visibility of the blade position.
- Strong, high-carbon steel cutting edge for long life.
 Optional rubber cutting edge to protect pavement surfaces available through Bobcat Parts for 5- to 8-foot models.
- Optional end wing kit turns Bobcat snow blades into snow pushers (end wing kit available for 7-foot and 8-foot models
- Quick loader hook-up with the exclusive Bob-Tach™ mounting system.

Description: An excellent way to quickly remove light or moderate snow from sidewalks and driveways. Moldboard angles right or left up to 30°. High visibility masts help locate blade corners.

TECHNICAL SPECIFICATIONS												
Description	Part Number	Cou- pling System	Width (cm)	Working Width (fully angled) (cm)	Cutting Edge (mm)	Cylinders	Trip Springs	Optional Rubber Cut- ting Edge (mm)	Weight (kg)	Control Kit Required	Working Flow	First Use Installa- tion Time
Snow Blade, HD, 244 cm, BT	7207862	ВТ	244	211	9.5 × 152.4	1	4	25.4 × 152.4	393	No	Standard	0.25 h
Snow Blade, HD, 274 cm, BT	7207863	ВТ	274	237	12.7 × 152.4	1	4	25.4 × 152.4	430	No	Standard	0.25 h

COMPATIBILITY CHARTS														
		Telehandlers												
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP		
Snow Blade, HD, 244 cm, BT	7207862	Х												
Snow Blade, HD, 274 cm, BT	7207863	Х												

OPTIONS / ACCESSORIES		
Description	Snow Blade HD 244 cm	Snow Blade HD 274 cm
Replacement Cutting Edge **	7161165	7160646
Wear Edge Kit, Rubber **	6905401	7169615
Wear Edge Kit, Poly **	7169617	7169618
QT/BT Adapter *	6812846	6812846

^{*} from S/N 004902300 & above

2025/2026 **275** ** To be ordered through Bobcat Parts ** To be ordered through Bobcat Parts


SNOW PUSHER

SNOW V-BLADE

Features & Benefits







Flotation and oscillation of the moldboard keep the snow pusher in contact with the ground without damaging equipment or property, allowing for snow removal over decorative and uneven

Features & Benefits

- When removing snow on flat surfaces, or when clearing hard packed snow, the floatation feature can be locked into a rigid
- The cutting edge rear support provides added strength to the moldboard.

 • Exterior gusseting reduces snow build up inside the boxed blade.
- It is ideal for clearing packing lots, driveways and building sites.

Description: Push snow with speed and efficiency from parking lots, driveways and building sites using the Bobcat Snow Pusher attachment. Available in 2.44 m and 3 m widths size matched to your telehandler and job.

Snow Pusher: No special requirement.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Cou- pling Sys- tem	Width (cm)	Cutting Edge (mm)	Skid Shoes (mm)	Vertical Float (mm)	Tilt (°)	Oscilla- tion ± (°)	Weight (kg)	Control Kit Re- quired	First Use Installation Time
Snow Pusher, 239 cm, BT	7113767	BT	239	38.1 × 203.2	19.1 × 127	58.4	12	4.5	509	No	None
Snow Pusher, 305 cm, BT	7116164	BT	305	38.1 × 203.2	19.1 × 127	58.4	12	4.5	570	No	None

COMPATIBILITY CHARTS												
						1	Telehandler	'S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Snow Pusher, 239 cm, BT	7113767	Х										
Snow Pusher, 305 cm, BT	7116164	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
QT/BT Adapter *	6812846

^{*} from S/N 004902300 & above



Attachment Control Kit

Snow V-Blade: Telehandler must be equipped with an Attachment Control and an ACD Key Pad as factory option. When used on a telehandler equipped with a 14-Pin Attachment Control Kit, a 14-Pin Attachment T-Harness Kit is required. Machine must have front hydraulic auxiliary.

2

- V-Blade: clear a path through deep snow.
- Straight Blade: pile large amounts of snow.
- Scoop Blade: scoop, push or pile snow. • 30° Left or Right Angle Blade: continuously push snow to
- either side of the loader.
- Fingertip adjustments of V-blade's five configurations.
 Multi-position frame allows blade to be raised or lowered to desired working height.
- Domed, adjustable skid shoes and trip springs provide operator and component protection.
- Optional rubber cutting edge kits available.

Description: This versatile, hydraulically operated attachment offers five different blade configurations to help operators move snow fast. The blade has on-the-go fingertip control and angles 30° right or left to continuously push snow to either side of the loader, straight or scoop configuration to push large amounts of snow, or v-configuration to plow through the deepest snow.



TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Width (cm)	Working Width (Scoop Blade) (cm)	Working Width (Angled 30°) (cm)	Working Width (V-Blade) (cm)	Oscilla- tion (with Flotation Kit) ± (°)	Weight (kg)	Control Kit Re- quired	Working Flow	First Use Installa- tion Time
Snow V-Blade, 213 cm, BT	6598577	BT	213	188	190	190	10	385	Yes	Standard	None
Snow V-Blade, 244 cm, BT	6958578	BT	244	213	215	217	10	406	Yes	Standard	None
Snow V-Blade, 274 cm, BT	6958579	BT	274	241	241	244	10	425	Yes	Standard	None

COMPATIBILITY CHARTS												
						T	elehandler	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Snow V-Blade, 213 cm, BT	6598577	Х										
Snow V-Blade, 244 cm, BT	6958578	Х										
Snow V-Blade, 274 cm, BT	6958579	Χ										

OPTIONS / ACCESSORIES	
Description	Part Number
Rubber Cutting Edge Kit, 213 cm (Includes hardware) **	6958666
Rubber Cutting Edge Kit, 244 cm (Includes hardware) **	6958667
Rubber Cutting Edge Kit, 274 cm (Includes hardware) **	6958668
QT/BT Adapter *	6812846

** To be ordered through Bobcat Parts

^{*} from S/N 004902300 & above

B4501805-EN (01-25)

SWEEPER





Requirements	Features & Benefits
--------------	---------------------

Load

Chart

3

• Cleans in forward or reverse.

- · Wear compensation for increased bristle life by patented height adjustment system.
- Reversible cutting edge and side protection as standard ensures long product life.
- Standard cutting edge of the sweeper can be used to scrape packed material.

 • Motor drain line.
- Equipped with new heavy duty bristles.
- Optional steel and polyurethane mix bristles.
- Optional gutter brush can be installed to increase versatility and increase sweeping width.

Description: The Bobcat sweeper can sweep and collect dirt or other debris in both forward and reverse. This attachment is perfect for cleaning parking lots, sidewalks, docks, and warehouses. New features like patented height adjustment placed on the top of the sweeper, double axis floating gutter brush guarantee an ease of operation while getting the job done.

QT/BT

1

TECHNICAL SPECIFICATIONS												
Description	Part Number	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Max. Flow Range (I/ min)	Weight (kg)	Control Kit Required			
Sweeper, 185 cm	7439856	185	0.45	550	PP *	43	60 - 115	467	No			
Sweeper, 185 cm - Steel/PP *	7439856.SP	185	0.45	550	Steel/PP *	43	60 - 115	467	No			
Sweeper, 215 cm	7439857	215	0.52	550	PP *	48	60 - 115	527	No			
Sweeper, 215 cm - Steel/PP *	7439857.SP	215	0.52	550	Steel/PP *	48	60 - 115	527	No			

^{*} Polypropylene

COI	MPATIBILITY CHARTS													
			Telehandlers											
	Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP	
0	QT/BT Adapter Required	6812846		Х	Х	Χ	Х							
	Sweeper, 185 cm	7439856	Χ	Х										
2	Sweeper, 185 cm - Steel/PP	7439856.SP	Χ	Χ										
	Sweeper, 215 cm	7439857	Χ	Χ	Х	Х	Х							
	Sweeper, 215 cm - Steel/PP	7439857.SP	Х	Х	Χ	Х	Х							

3	Load chart (see load chart matrix below)
---	--

LOAD CHART MATRIX													
		Telehandlers											
Description	Part Number	TL25.60	TL26.60/ TL30.60/	TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Sweeper, 185 cm	7439856	74948021	7453629	7453630									
Sweeper, 185 cm - Steel/PP	7439856.SP	74948021	7453629	7453630									
Sweeper, 215 cm	7439857	74948021	7453629	7453630	7453631	7453632	7453633						
Sweeper, 215 cm - Steel/PP	7439857.SP	7494802¹	7453629	7453630	7453631	7453632	7453633						

¹Coming standard with TL25.60 machines

OPTIONS / ACCESSORIES	OPTIONS / ACCESSORIES												
Description	Part Number	Weight (kg)	First Use Installation Time										
Gutter Brush Right Side	7440928	50	15 min										
Gutter Brush Left Side	7441403	50	15 min										

OPTIONS / ACCESSORIES COMPATIBILITY			
	Sweeper 185 cm	Sweeper 215 cm	
Description	7439856	7439857	Pictures
	7439856.SP	7439857.SP	
Gutter Brush Right Side	7440928	7440928	
Gutter Brush Left Side	7441403	7441403	




LOAD CHART MANDATORY FOR TLS APPLICATION. TO BE ORDERED SEPARATELY THROUGH PARTS



THE BEST SWEEP PERFORMANCE IS **ACHIEVED WITH THE SWEEPER WIDER THAN THE CARRIER**

SWEEPER, HD OPEN FRAME

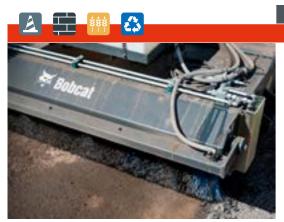



Sweeper: Machine must have front hydraulic auxiliary.

- Cleans in forward or reverse.
- Heavy duty polyurethane bristles guarantee long product life.

Features & Benefits

- Standard cutting edge of the sweeper can be used to scrape packed material.
- Cutting edge and side protection as standard ensures long
- product life.

 Wear compensation for increased bristle life by height adjustment system.
- Well protected hydraulic motor with pressure relief valve.
- Well protected hydraulic motor with pressure relief val.
 Optional gutter brush can be installed to increase versatility and increase sweeping width.

Description: The Bobcat open design sweeper can sweep and collect dirt or other debris in heavy duty applications. The brush is mounted in front of the collection bucket, allowing cleaning in tight industrial places, while guaranteeing the best weight distribution. Vertically angling the sweeper and reversing the flow can be used for material removal without collection in the bucket. This attachment is perfect for cleaning up asphalt and farm grindings. Double axis floating gutter brush guarantee an ease of operation while getting the job done.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Coupling System	Sweeping Width (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required
HD Open Frame Sweeper, 180 cm, BT	7457918	ВТ	180	0.195	600	PP *	42 / 39	40 - 50	546	No

COMPATIBILITY CHARTS												
						1	elehandler	s				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
HD Open Frame Sweeper, 180 cm, BT	7457918	Х										


LOAD CHART MATRIX														
						1	Telehandl	ers						
Description	TL25.60	TL26.60/ TL30.60	TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105	T35.105L	T36.120SL	T35.130S	T35.130SLP	T35.140S	T41.140SLP	T40.180SLP
HD Open Frame Sweeper	7494802													

OPTIONS / ACCESSORIES											
Description	Part Number	Weight (kg)	First Use Installation Time								
Gutter Brush Right Side for HD Open Frame Sweeper 180 cm	7465814	30	30 min								
Gutter Brush Left Side for HD Open Frame Sweeper	7461926	30	30 min								

OPTIONS / ACCESSORIES COMPATIBILITY		
Description	Sweeper 180 cm	Pictures
	7457918	
Gutter Brush Right Side	7465814	
Gutter Brush Left Side	7461926	The state of the s

80 2025/2026 <mark>281</mark>

SWEEPER, MULTIPURPOSE

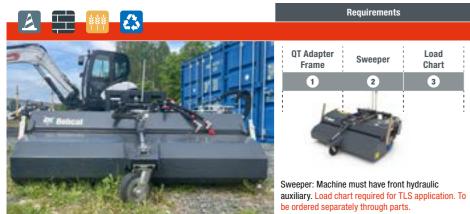

perfect for cleaning parking lots, roads, docks, and warehouses.

• Hydraulic motor with direct drive.

Chart

3

 Adjustable heavy duty polyurethane bristles guarantee long product life.

Features & Benefits

- Front hopper opening hydraulically from cab.
- All models manually rotatable +/-20° and hopper lockable in open position.
- Supported by 3 pivoting wheels.
- Self-leveling system with indicators.
- Carrier interface adapter easily replaceable with dedicated couplers.
- Mechanical fuse to protect carrier in case of obstacle.
- Optional gutter brush can be installed to increase versatility and increase sweeping width.

Description: The Bobcat multipurpose sweeper can sweep and collect dirt or other debris. Floating parallelogram self-levelling system guarantee an ease of operation while getting the job done. Angling the sweeper and reversing the flow allows for material removal without collection on the hopper. Multiple interface adapter easily interchangeable for each carrier. This attachment is

TECHNICAL SPECIFICATIONS												
Description	Part Number	Sweeping Width (straight/ angled) (cm)	Bucket Capacity (m³)	Brush Diameter (mm)	Bristle Material	Number of Sections	Flow Range (I/min)	Weight (kg)	Control Kit Required			
Multipurpose Sweeper, 200 cm	7457928	200 / 188	0.16	600	PP *	35 + 2	40 - 50	625	No			
Multipurpose Sweeper, 230 cm	7457929	230 / 216	0.19	600	PP *	44 + 2	40 - 50	660	No			
Multipurpose Sweeper, 260 cm	7457930	260 / 244	0.21	600	PP *	50 + 2	40 - 50	695	No			

^{*} Polypropylene

COI	MPATIBILITY CHARTS														
			Telehandlers												
	Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP		
1	Adapter Frame BT for Multipurpose Sweeper 200 - 230 cm	7468000	Х												
	QT Adapter frame required	7468002	Х	Х	Х	Х	Х	Х	Х	Х	X	Х	Х		
	Multipurpose Sweeper, 200 cm	7457928	Х	Х											
2	Multipurpose Sweeper, 230 cm	7457929	Х	Х	Χ	Χ	Χ	Х	Χ	Х	Χ	Χ	Х		
	Multipurpose Sweeper, 260 cm	7457930		Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ		
3	Load chart (see load chart matrix below)														

LOAD CHART MATRIX															
							T	elehandle	rs						
Description	TL25.60	TL26.60	TL30.60	TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105	T35.105L	T36.120SL	T35.130S	T35.130SLP	T35.140S	T41.140SLP	T40.180SLP
Multipurpose Sweeper, 200 cm	74948021	7480678	7480679	7480680											
Multipurpose Sweeper, 230 cm	74948021	7480678	7480679	7480680	7480681	7480682	7480683	7480684	7480685	7480686	7480687	7480688	7480689	7480690	7480691
Multipurpose Sweeper, 260 cm	74948021	7480678	7480679	7480680	7480681	7480682	7480683	7480684	7480685	7480686	7480687	7480688	7480689	7480690	7480691

¹Coming standard with TL25.60 machines

OPTIONS / ACCESSORIES			
Description	Part Number	Weight (kg)	First Use Installation Time
Gutter Brush Right Side for Multipurpose Sweepers 200 cm - 260 cm	7468291	40	30 min
Gutter Brush Left Side for Multipurpose Sweepers 200 cm - 260 cm	7468292	40	30 min

OPTIONS / ACCESSORIES COMPATIBILITY				
Description	Sweeper 200 cm	Sweeper 230 cm	Sweeper 260 cm	Pictures
Description	7457928	7457929	7457930	i iotares
Gutter Brush Right Side	7440928	7440928	7440928	
Gutter Brush Left Side	7441403	7441403	7441403	



FOR BETTER PERFORMANCE, LONG **BRISTLE LIFE, AND LOW FUEL** CONSUMPTION, SEE THE OPERATOR'S **MANUAL FOR RECOMMENDED SETTINGS**



THE BEST SWEEP PERFORMANCE IS **ACHIEVED WITH THE SWEEPER WIDER** THAN THE CARRIER, ALSO WHEN THE SWEEPER IS ANGLED, AND AT 6 KM/H **TRAVEL SPEED**



LOAD CHART MANDATORY FOR TLS APPLICATION. TO BE ORDERED **SEPARATELY THROUGH PARTS**

TILLER



Features & Benefits

- Bidirectional rotation allows both top-cutting and undercutting in either travel direction.
- Offset mounting permits tilling next to sidewalks, curbs and buildings.
- \bullet Hydraulically powered; no shear pins to maintain.
- Hardened, double-edge, replaceable tines.
 Exclusive Bob-Tach™ mounting system permits quick hookup to loader.
- Forward/reverse travel direction.

Tiller: Machine must have front hydraulic auxiliary.

Description: A great landscaping attachment. It quickly breaks up ground and mixes compost and other materials into the soil. Offset mounting permits tilling next to sidewalks, curbs and buildings.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Coupling System	Width (cm)	Digging Depth (cm)	Required Hydraulic Flow (I/min)	Number of Tines	Travel Direction	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Tiller, 193 cm, BT	7102125	ВТ	193	15.2	64 - 140	44	Forward/ Reverse	361	No	Standard	None

COMPATIBILITY CHARTS												
						T	elehandler	'S				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Tiller, 193 cm, BT	7102125	Х										

OPTIONS / ACCESSORIES	
Description	Part Number
QT/BT Adapter *	6812846
Bottom Skid **	7280548

^{*} from S/N 004902300 & above



TRENCHER



Speed: Up to 90m/hour

* Performances are estimated only and can vary depending on the type of soil, depth of use, operator experience,

Performance *

• Designed and built specifically for Bobcat loaders.

Features & Benefits

- . Hydraulic sideshift capability to trench close to buildings, fences or other objects.
- · Get even closer by removing the auger.
- Changing to a trencher attachment is quick and easy with the Bob-Tach™ mounting system.

Requirements: Machine must have front hydraulic auxiliary.

Description: This versatile tool can be used for a variety of jobs ranging from light to high-production trenching. Digging depths range from 60 cm to 1.5 m. The sideshift feature lets you get close to walls or fences.

TECHNICAL SPECIFICATIONS													
Description	Part Number	Cou- pling System	Digging Depth * (mm)	Trench Width (mm)	Boom Length (mm)	Working Speed (m/h)	Required Hydraulic Flow (I/min)	Side- shift (mm)	Sideshift System (as stan- dard)	Weight (kg)	Control Kit Required	Working Flow	First Use Installation Time
Trencher LT313 w/ Chain Complete, BT	M7015*1499002	ВТ	1200	152 - 305	1664	± 250 - 500	57 - 83	587	Manual	444	No	Standard	None

COMPATIBILITY CHARTS												
						1	elehandle	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	ТL34.65НF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Trencher LT313 w/ Chain Complete, BT	M7015*14990052	Х										

OPTIONS / ACCESSORIES Part Number Description **Cup Teeth Patterns** Spacer Kits * Widens the chain up to 30 cm. QT/BT Adapter * 6812846 Cup Tooth Kit, LT313, LT414 ** 6807925 Carbide Teeth Kit, LT313, LT414 ** 6809387 Spacer Kit, 20 cm, LT313, LT414 (Used with Cup Teeth for 20 cm width) ** 7110911 Spacer Kit, 25 cm, LT313, LT414 (Used with Cup Teeth for 25 cm width) ** 7110912 Spacer Kit, 30 cm, LT313 (Used with Cup/Carbide Teeth for 30 cm width) ** 7110913 Spacer Kit, 20 cm, LT313 (Used with Cup/Carbide Teeth for 20 cm width) ** 6809324 6806975 Trench Cleaner Adapter, 20 cm, LT313, LT414 ** * IMPORTANT: When installing spacer kits, a Trench Cleaner Adapter, 25 cm, LT313, LT414 ** 6806976 trench cleaner adapter must also be installed. Trench Cleaner Adapter, 30 cm, LT313, LT414 ** 6806977

* from S/N 004902300 & above



* PERFORMANCES ARE ESTIMATED ONLY AND CAN VARY DEPENDING ON THE TYPE OF SOIL, DEPTH, AND WIDTH OF USE, **OPERATOR EXPERIENCE, ...**

WINCH

WINCH, JIB





- Hydraulic ascent and descent limit stops
- Homologated hook included
- Horizontallity indicator
- Cable pressing roller
 Metal pedestal as standard for easy storage

Features & Benefits

Winch: Winch detection kit required (7453908)

Description: Turn your telehandler into a crane by choosing our Bobcat hydraulic winch to raise and lower loads without moving the boom. Their engineering design guarantees maximum performance while also giving you a smooth operation.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Coupling System	Reach (mm)	Rope Diam- eter (mm)	Maximum Lifting Height (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time
Winch 3500 kg QT	7441100	QT	700	10		3500	480	None

COMPATIBILITY CHARTS												
						1	Telehandler	's				
Description	Part Number	TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Winch 3500 kg QT	7441100								Χ		Х	Χ





• Equipped with a front leg as standard for easy storage
• Built-in hydraulic winch

Features & Benefits

- Cable pressing roller
- Horizontallity indicator
- Hydraulic ascent and descent limit stops


Winch: Winch detection kit required (7453908)

Description: Use a handy jib to position loads in places that would otherwise be difficult to access. The jib winch allows you to handle material over roofs and obstacles, or in areas below ground

TECHNICAL SPECIFICATIONS								
Description	Part Number	Coupling System	Reach (mm)	Rope Diam- eter (mm)	Maximum Lifting Height (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time
Jib, Winch 2m 1500 kg QT	7441101	QT	2000	10		1500	435	None

COMPATIBILITY CHARTS												
Description	Part Number	Telehandlers										
		TL25.60	TL26.60/ TL30.60/ TL30.70	TL34.65HF	TL35.70/ TL38.70HF	TL43.80HF	T35.105/L	T36.120SL	T35.130S/ SLP	T35.140S	T41.140SLP	T40.180SLP
Jib, Winch 2m 1500 kg QT	7441101								Χ		Χ	Χ



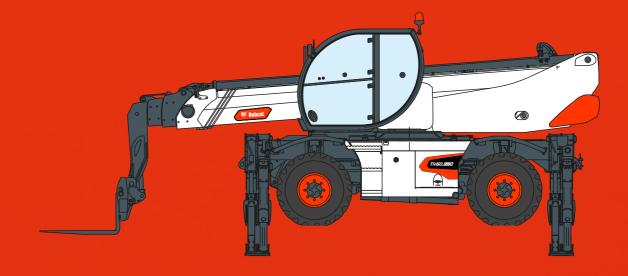

ROTARY TELEHANDLERS



BUCKET, GENERAL PURPOSE

Good cutting edge visibility.
 Excellent bucket breakout force for better digging and easier bucket filling.

Features & Benefits

Description: The general purpose bucket is suitable for loading and handling various light weight materials such as aggregates, sand, gravel, mulch, snow and grain.

TECHNICAL SPECIFICATIONS				
Description	Part Number	Width (mm)	Capacity (I)	Weight (kg)
General Purpose Bucket, 2450 mm, 1000 L	7421759	2450	1000	435

COMPATIBILITY CHARTS										
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
General Purpose Bucket, 2450 mm, 1000 L	7421759	Χ	Χ	Х	Х	Х	Х	Х	Х	Х

BUCKET, WASTE

CONCRETE BASKET



Features & Benefits


- Designed for loading, carrying or sorting aggregades around the jobsite.
- Strong design guaranteeing long product life.
 Excellent breakout force for easier bucket filling.

Waste Bucket: No special requirement.

 $\textbf{Description:} \ \textbf{Optimized engineering design to move aggregates around the jobsite.}$

TECHNICAL SPECIFICATIONS				
Description	Part Number	Width (mm)	Capacity (I)	Weight (kg)
Waste Bucket, 2400 mm, 2000 l	7421762	2410	2000	490

COMPATIBILITY CHARTS										
			Rotary Telehandlers							
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Waste Bucket, 2400 mm, 2000 l	7421762	Х	Х	Х	Х	Х	Х	Х	Х	Х

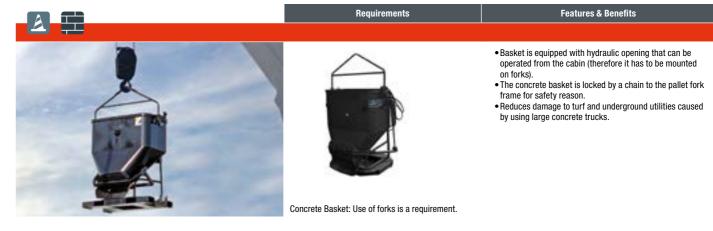

Description: With this attachment, you can quickly pour your concrete wherever it is needed. With the hydraulic opening system, emptying the 600 I bucket is simple.


TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (mm)	Length (mm)	Height with Lifting Handle (mm)	Capacity (I)	Opening	Weight (kg)	First Use Installation Time		
Concrete Basket, 600 L	7421792	1180	1130	2020	600	Hydraulic	197	None		

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Concrete Basket, 600 L	7421792	Х	Х	Х	Х	Х	Х	Х	Х	Х

JIB, CRANE

JIB, EXTENSION

Features & Benefits



Homologated hook included.
 Metal pedestal as standard for easy storage.



Crane Jib: No special requirement.

Description: The use of hooks can increase your working scope considerably when you are placing suspended loads. Provided with metal pedestals for easy storage as standard.

TECHNICAL SPECIFICATIONS	TECHNICAL SPECIFICATIONS										
Description	Part Number	Length (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time						
Crane Jib, 5.0 t, 0.5 m	7453470	500	5000	138	None						
Crane Jib, 6.0 t, 0.5 m	7421765	500	6000	140	None						
Crane Jib, 8.0 t, 1.1 m	7421768	1102	8000	190	None						

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Crane Jib, 5.0 t, 0.5 m	7453470	Х	Х	Х	Х	Х	Х	Х	Х	Х
Crane Jib, 6.0 t, 0.5 m	7421765				Х	Х	Х	Х	Х	X
Crane Jib, 8.0 t, 1.1 m	7421768							Х	Х	X



Robust design guaranteeing durability of the attachment.
 Homologated hook included.
 Perfect to handle construction materials.

Description: Use a handy extension jib to position loads in places that would otherwise be difficult to access. The jib increases your forward reach.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Length (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time						
Extension Jib, 0.6 t, 3.9 m	7421771	3950	600	245	None						
Extension Jib, 2.0 t, 2.7 m	7421774	2700	2000	280	None						

COMPATIBILITY CHARTS										
			Rotary Telehandiers							
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Extension Jib, 0.6 t, 3.9 m	7421771	Х	Х	Х	Х	Х	Х	Х	Х	Х
Extension Jib, 2.0 t, 2.7 m	7421774	Х	Х	Х	Х	Χ	Х	Х	Х	Х

Extension Jib, 0.6 t, 3.9 m



Extension Jib, 2.0 t, 2.7 m



JIB, EXTENSION, WITH WINCH


Requirements • Extension jib from 2.16 m to 7.1 m. • Built-in hydraulic winch. • Cable pressing roller. • Horizontallity indicator. • Hydraulic ascent and descent limit stops. Extension Jib and Winch: No special requirement.

Description: Use a handy extension jib to position loads in places that would otherwise be difficult to access. The jib equipped with winch increases your forward reach.

TECHNICAL SPECIFICATIONS										
Description	Part Number	Width (mm)	Capacity (kg)	Length (mm)	Weight (kg)	First Use Installation Time				
Extension Jib with Winch, 0.8 t, 7.1 m	7421786	1090	800	7100	670	None				
Extension Jib with Winch, 1.5 t, 2.2 m	7421789	1090	1500	2160	400	None				

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Extension Jib with Winch, 0.8 t, 7.1 m	7421786	Х	Х	Х	Х	Х	Х	Х	Х	Х
Extension Jib with Winch, 1.5 t, 2.2 m	7421789	Х	Χ	Х	Х	Χ	Χ	Χ	Х	Х

MAN PLATFORM, EXPANDABLE

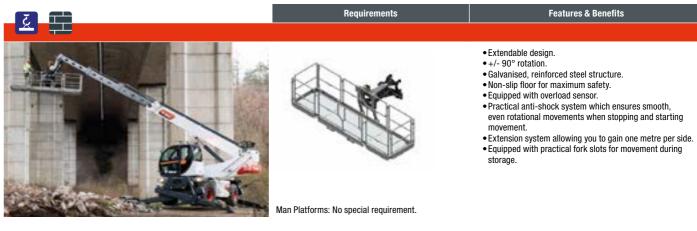

Description: Use the man platform for great flexibility in work, working with scaffoldings or other applications in heights, while simplifying and speeding up the job.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Platform Dimension (mm)	Capacity (kg)	Max. People	Rotation	Expendable	Weight (kg)	First Use Installation Time
Man Platform, Rotating, Expandable, 2.35 m - 4.5 m, 500 kg, without R/C	7421799	2350 - 4530 × 1100	500	3	± 90° hydraulic	Yes	730	None
Man Platform, Rotating, Expandable, 2.35 m - 4.7 m, 1000 kg, without R/C	7421802	2384 - 4685 × 1100	1000	3	± 90° hydraulic	Yes	925	None

COMPATIBILITY CHARTS										
					Rota	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Man Platform, Rotating, Expandable, 2.35 m - 4.5 m, 500 kg, without R/C	7421799	Х	Х	Х	Х	Х	Х	Х	Х	X
Man Platform, Rotating, Expandable, 2.35 m - 4.7 m, 1000 kg, without R/C $$	7421802	Х	Х	Х	Х	Х	Х	х	Х	Х

MAN PLATFORM, EXPANDABLE, ROOFING





- +/-90° rotation.
 Approved to carry three people.
 Suitable for egress at height thanks to an openable guide which facilitates operator ingress/egress.
 Sensors to disable movements with the basket open.
 Galvanised, reinforced steel structure.
 Non-slip floor covering for maximum safety.
 Equipped with overload sensor.
 Artis-shock system ensures smooth, even rotational.

- Anti-shock system ensures smooth, even rotational movements when stopping and starting movement.


Description: Use the man platform for great flexibility in work, working with scaffoldings or other applications in heights, while simplifying and speeding up the job.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Platform Dimension (mm)	Capacity (kg)	Max. People	Rotation	Expendable	Weight (kg)	First Use Installation Time
Man Platform, Rotating, Expandable, 2.50 m - 3,5 m, 1000 kg, for Roofs, without R/C	7421808	Open: 3500 × 1800 Closed: 2500 × 1800	1000	3	± 90° hydraulic	Yes	1190	None

COMPATIBILITY CHARTS										
					Rot	ary Telehand	llers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Man Platform, Rotating, Expandable, 2.50 m - 3,5 m, 1000 kg. for Roofs, without R/C	7421808	Х	Х	Х	Х	Х	Х	Х	Х	Х



MAN PLATFORM, FIXED, TELESCOPIC

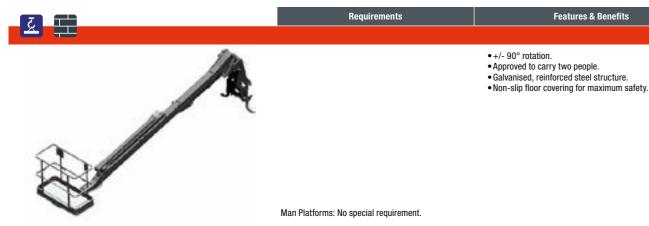

Description: Use the man platform for great flexibility in work, working with scaffoldings or other applications in heights, while simplifying and speeding up the job.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Platform Dimen- sion (mm)	Capacity (kg)	Max. People	Rotation	Expend- able	Tele- scopic Reach (m)	Tele- scopic Height (m)	Length of Boom (mm)	Weight (kg)	First Use Installation Time
Man Platform, Fixed, 0.67 m \times 1.4 m, 200 kg, Telescopic, without R/C	7421811	1400 × 700	200	2	± 90° hydraulic	No	6.4 - 10.2	6.4 - 9.8	3330	940	None

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Man Platform, Fixed, 0.67 m \times 1.4 m, 200 kg, Telescopic, without R/C	7421811	Х	Х	Х	Х	Х	Х	Х	Х	Х

MAN PLATFORM, POSITIVE / NEGATIVE TELESCOPIC



• 340 degrees hydraulic rotation. • Maximum capacity of 200 kg.

- Approved to carry two people.
- Galvanised, reinforced steel structure.
- Non-slip floor covering for maximum safety.
- Equipped with boom position sensor, which can be easily consulted on the display in the cab.

Features & Benefits


Man Platforms: No special requirement.

Description: Use the man platform for great flexibility in work, working with scaffoldings or other applications in heights, while simplifying and speeding up the job.


TECHNICAL SPECIFICATIONS											
Description	Part Number	Platform Dimension (mm)	Capacity (kg)	Max. People	Rotation	Expend- able	Tele- scopic Reach (m)	Tele- scopic Height (m)	Length of Boom (mm)	Weight (kg)	First Use Installation Time
Man Platform, Rotating, 0.80 m \times 1.2 m, 250 kg, Telescopic, Positive/Negative, without R/C	46909565	1240 × 800	250	2	340° hydraulic	No	5.1 - 6.9	5 - 6.7	1800	1365	None

COMPATIBILITY CHARTS										
					Rot	ary Telehand	llers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Man Platform, Rotating, 0.80 m × 1.2 m, 250 kg, Telescopic, Positive/Negative, without R/C	46909565	Х	Х	Х	Х	Х	Х	Х	Х	Х

MAN PLATFORM, RIGID



- Accomodates up to 2 people.
 Galvanized reinforced steel structure.
 Non-slip floor to ensure maximum safety.




Man Platforms: No special requirement.

Description: Use the man platform for great flexibility in work, working with scaffoldings or other applications in heights, while simplifying and speeding up the job.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Platform Dimension (mm)	Capacity (kg)	Max. People	Rotation	Expendable	Weight (kg)	First Use Installation Time
Man Platform, Rigid, 1.4 m, 250 kg, without R/C	7421795	1400 × 700	250	2	No	No	940	None

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Man Platform, Rigid, 1.4 m, 250 kg, without R/C	7421795	Х	Х	Х	Х	Х	Х	Х	Х	Х

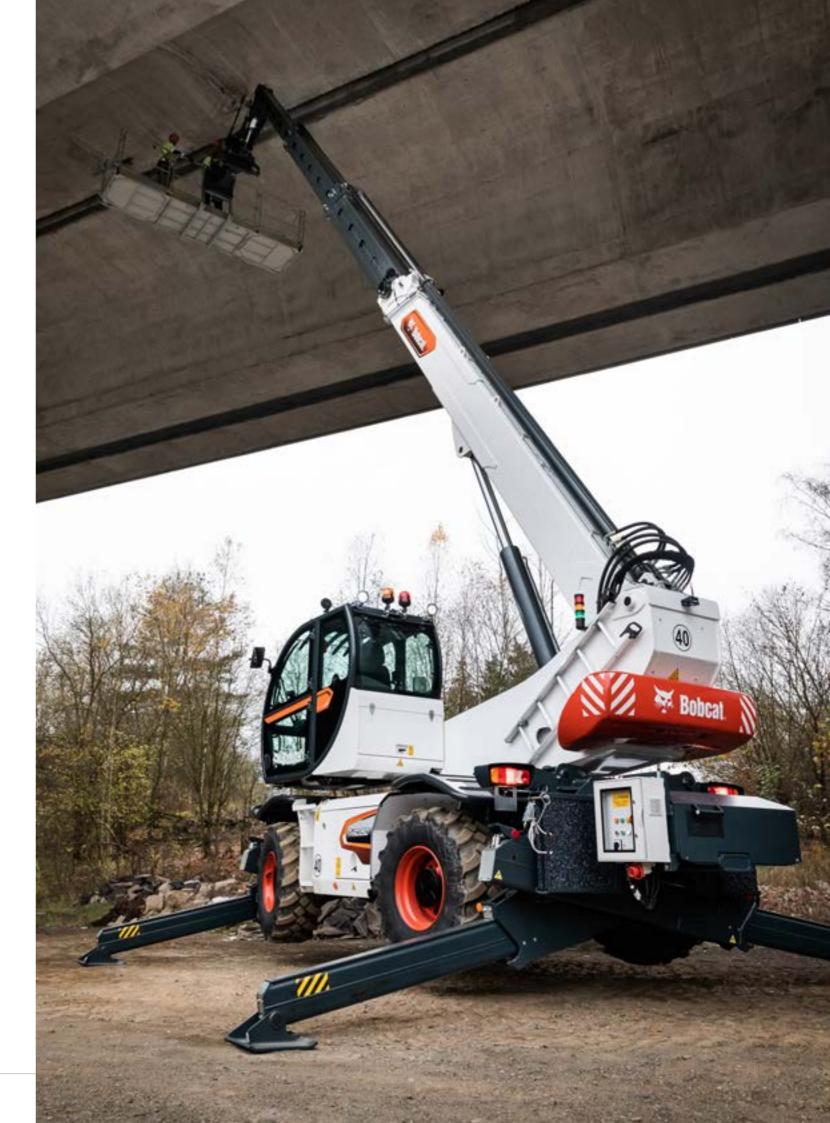

ROTARY TELEHANDLERS

PALLET FORKS, FLOATING

Requirements Pick up and place pallets to and from truck beds, scaffoldings and rooftops. Foldable forks for road circulation. Forks are independently adjustable. Forks can easily adapt to uneven ground conditions thanks to the eyebolt feature on frame. Pallet forks: No special requirement

Description: Use this versatile attachment to lift, carry, stack or place all types of pallet materials even on rough and uneven surfaces in construction sites, municipal projects, industrial areas and farms. Floating forks are free to swing while always remaining level with the ground, to avoid load spillage.


TECHNICAL SPECIFICATIONS						
Description	Part Number	Frame Width (mm)	Fork Length (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time
Pallet Fork Frame Floating, 1.3 m wide, 5.0 t capacity, Forks included	46895339	1300	1200	5000	240	None
Pallet Fork Frame Floating, 1.3 m wide, 6.0 t capacity, Forks included	46895004	1300	1200	6000	240	None
Pallet Fork Frame Floating, 1.3 m wide, 8.0 t capacity, Forks included	46895342	1300	1200	8000	285	None

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Pallet Fork Frame Floating, 1.3 m wide, 5.0 t capacity, Forks included	46895339	Х	х	х	х	х	Х	Х	Х	Х
Pallet Fork Frame Floating, 1.3 m wide, 6.0 t capacity, Forks included	46895004				Х	Х	Х	Х	Х	Х
Pallet Fork Frame Floating, 1.3 m wide, 8.0 t capacity, Forks included	46895342							Х	Х	Х

OPTIONS / ACCESSORIES									
Description	Part Number	Weight (kg)	First Use Installation Time						
Backrest for Floating forks frame **	46899256	13	None						

** To be ordered through Bobcat Parts

PALLET FORKS, RIGID

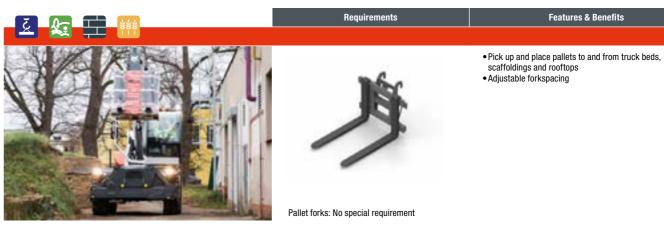

Description: This versatile attachment isn't just for picking up and placing large pallets of construction materials. It also handles any kind of bulky or bagged material, from cement bags to roof beams. Especially handy when working in tight areas or along narrow aisles.

TECHNICAL SPECIFICATIONS						
Description	Part Number	Frame Width (mm)	Fork Length (mm)	Capacity (kg)	Weight (kg)	First Use Installation Time
Pallet Forks Frame Rigid, FEM, 1.3 m wide, 6.0 t capacity, Forks included	7421753	1300	1200	6000	415	None

COMPATIBILITY CHARTS										
		Rotary Telehandlers								
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Pallet Forks Frame Rigid, FEM, 1.3 m wide, 6.0 t capacity, Forks included	7421753	Х	Х	Х	Х	Х	Х	Х	Х	Х

OPTIONS / ACCESSORIES										
Description	Part Number	Weight (kg)	First Use Installation Time							
Backrest for FEM forks frame **	7422273	17	None							

** To be ordered through Bobcat Parts

PALLET FORKS, ROTATING

RIB HANDLER



equirements Features & Benefits


- Pick up and place pallets to and from truck beds, scaffoldings and rooftops.
- +/- 90° rotation.
- Manually adjustable forkspacing.

Pallet forks: No special requirement.

Description: This versatile attachment isn't just for picking up and placing large pallets of construction materials. It also handles any kind of bulky or bagged material, from cement bags to roof beams. +/-90° rotation capability makes it the perfect attachment when working in tight areas or placing material within buildings.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Frame Width (mm)	Fork Length (mm)	Rotation	Capacity (kg)	Weight (kg)	First Use Installation Time				
Pallet Forks Frame Rotating, FEM, 1.3 m wide, 5 t capacity, Forks included	46899247	1216	1200	± 90° hydraulic	5000	672	None				

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Pallet Forks Frame Rotating, FEM, 1.3 m wide, 5 t capacity, Forks included	46899247	Х	Х	Х	Х	Х	Х	Х	Х	Х





 Clamp made of high-strength material for positioning the ribs comprising the supporting arches for tunnel construction.

Rib Handler: No special requirement.

Description: With this attachment you can mount arches in tunnels safely and efficiently. The grab can tilt up to 46°, and rotate 65°. What's more, set-up is quick and easy.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Capacity (kg)	Tilting Capacity	Rotation	Weight (kg)	First Use Installation Time					
Rib Handler, 4.0 t	7421817	4000	46°	± 65° manual	740	None					

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Rib Handler, 4.0 t	7421817	Х	Х	Х	Х	Х	Х	Х	Х	Х

WINCH



Features & Benefits


- Hydraulic ascent and descent limit stops.
 Homologated hook included.
 Metal pedestal as standard for easy storage.



Description: Turn your handler into a crane by choosing one of our Bobcat hydraulic winches available to raise and lower loads without moving the boom. Their engineering design guarantees maximum performance while also giving you a smooth operation.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Width (mm)	Rope Diameter (mm)	Max. Rope Length (m)	Capacity (kg)	Weight (kg)	First Use Installation Time				
Winch 3.5 t	7421777	1090	10	54	3500	450	None				
Winch 5.0 t	7518881	1090			5000	552	None				
Winch 6.0 t	7421780	1090	12	58	6000	520	None				
Winch 8.0 t	7421783	1090	16	88	8000	960	None				

COMPATIBILITY CHARTS										
					Rot	ary Telehand	lers			
Description	Part Number	180	.210	250	220	260	310	270	350	390
	Number	TR50.180	TR50.210	TR50.250	TR60.220	TR60.260	TR60.310	TR80.270	TR80.350	TR80.390
Winch 3.5 t	7421777	Х	Х	Х	Х	Х	Х	Х	Х	Х
Winch 5.0 t	7518881	Х	Х	Х	Х	Х	Х	Х	Х	Χ
Winch 6.0 t	7421780				Х	Х	Χ	Χ	Χ	Χ
Winch 8.0 t	7421783							Χ	Χ	Χ

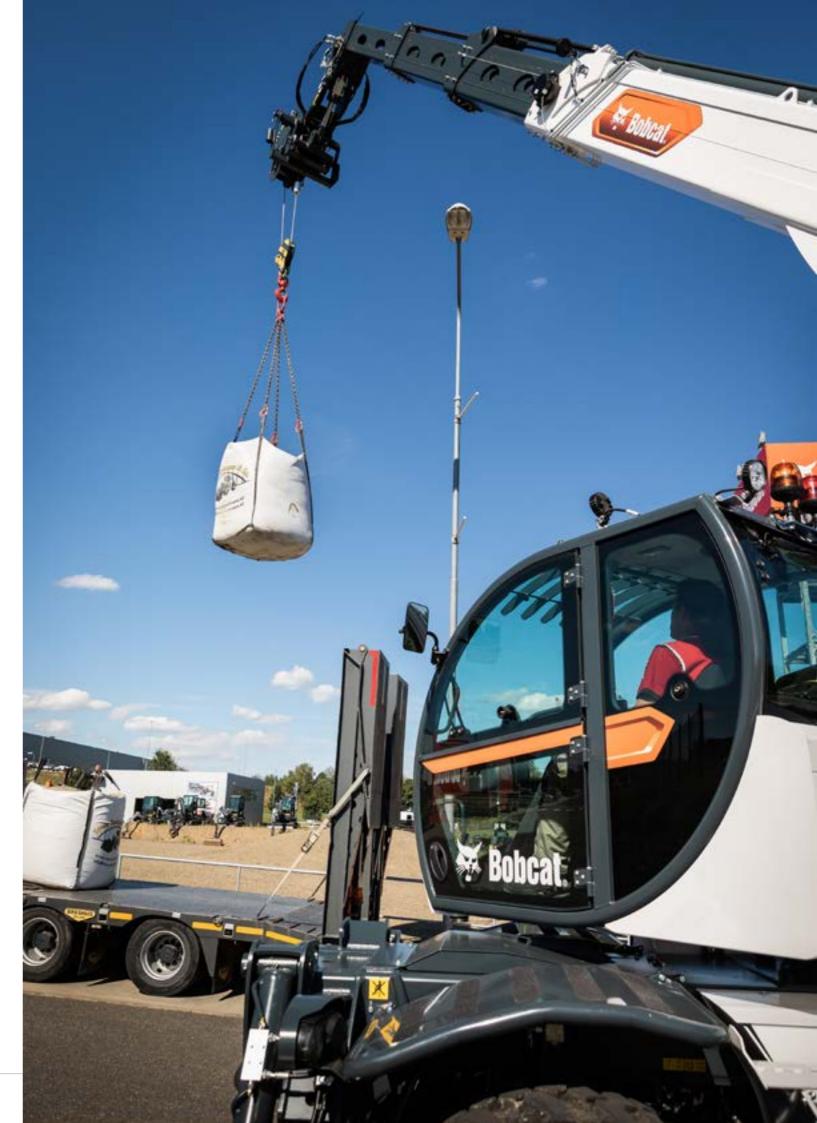





BACKHOE LOADERS

BACKHOE LOADERS B4501805-EN (01-25)

BREAKER

BUCKET, COMBINATION



The cylindrical design improves access to jobs in confined areas, providing accurate attachment operation in more operating environments.

Upper and lower shock absorbers isolate the breaker from the housing,

Features & Benefits

- reducing noise and vibration to deliver operator comfort without sacrificing performance. Silences standard for breaker model.
- Diaphragm-type accumulators reduce maintenance by preventing slow
- Long-life breaker designed for all demolition jobs with minimal
- maintenance.
 The innovative steel ring feature allows retaining the tool brushing, protecting the grease access and provides a quick tool change solution.
- Designed for minimum downtime and with few service parts to reduce operation cost and improve overall lifetime of the attachment.
- Bobcat breakers produce low recoil and minimal hydraulic pressure spike
- to their carriers.
- Breakers can be mounted on your backhoe loaders with various sustems: directly to the arm pin onto the arm, with the hydraulic quick coupler or with either of the two mechanical couplers - Klac and German Systems.

Breaker includes: Nail Point, fixing cap bolts, gauge tool and hose protector. Special Application Kit must be installed

Description: Bobcat breakers offer high performance, low maintenance, and are easy to use. All breakers feature a frame with a cylindrical design, providing improved access to jobs in confined areas. All breakers have a silences housing as standard.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Flow (I/min)	Blow Rate - Soft Ground (beats/min)	Blow Rate - Hard Ground (beats/min)	Operating Pressure (bar)	Weight (kg)	Control Kit Required	First Use Installation Time
Breaker, HB1380	7157576	65 - 120	780 - 1030	900 - 1230	125	385	No	2 h
Breaker, B730M*	7444586	50 - 100	400 - 800	400 - 800	150	451	No	2 h

^{*} includes mount cap, hoses and adapters

CO	COMPATIBILITY CHARTS										
				Backhoe Loaders							
	Description	Part Number	B730R	B730M	B780						
	Breaker HB1380 (Requires Hose Kit and Fixing Cap)	7157576	X		X						
	Breaker, B730M	7444586		X							
	Breaker HB1380 Hose Kit	7302945	X		X						
2	Breaker HB1380 Fixing Cap	7326807			X						
	Breaker HB1380 Fixing Cap	7444013	X								



• Ideal for dozing, grappling, levelling, digging, loading and

Features & Benefits

 Built with heavy-duty cutting edges and protected cylinders for long life.

Description: Dozing, grappling, levelling, digging, loading and dumping. This multi-purpose bucket does it all. Use it on demolition, construction, landscaping and municipal jobs. It's design to provide optimum digging force and the interlocking serrated grapple edges hold objects securely.

6 in 1 Ready Piping required on the machine for operation of the bucket.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Front/Rear	Heaped Capacity (I)	Weight (kg)	Height (mm)	Length (mm)	Width (mm)	Number of Bolt On Teeth			
Bucket, Combination 228 cm	7298264	Front	1000	705	1015	815	2280	8			
Bucket, Combination 240 cm	7298265	Front	1100	760	1015	815	2400	8			
Bucket, Combination 228 cm, with Bucket Piping	7451812	Front	1000	686	1015	815	2280	8			
Bucket, Combination 228 cm, with Bucket Lines	7453707	Front	1000	695	1015	815	2280	8			
Bucket, Combination 228 cm, with Pallet Fork	7452791	Front	1000	893	1015	815	2280	8			

COMPATIBILITY CHARTS									
		Backhoe Loaders							
Description	Part Number	B730R	B730M	8780					
Bucket, Combination 228 cm	7298264	X							
Bucket, Combination 240 cm	7298265			X					
Bucket, Combination 228 cm, with Bucket Piping	7451812		X						
Bucket, Combination 228 cm, with Bucket Lines	7453707		X						
Bucket, Combination 228 cm, with Pallet Fork	7452791		X						







Features & Benefits

Buckets: No special requirement.

Description: Tackle the toughest digging and material handling jobs with our robust digging buckets. They offer excellent breakout force for digging and easier bucket filling.

TECHNICAL SPECIFICATIONS								
Description	Part Number	Front/Rear	Heaped Capacity (I)	Weight (kg)	Height (mm)	Length (mm)	Width (mm)	Number of bolt on teeth
Bucket, Digging 26 cm	7434558	Rear	70	140	760	703	260	3 (incl. 2 side cutters)
Bucket, Digging 30 cm	7323856	Rear	80	116	650	970	300	3 (incl. 2 side cutters)
Bucket, Digging 30 cm	7412054	Rear	80	116	650	970	300	3 (incl. 2 side cutters)
Bucket, Digging 36 cm	7434562	Rear	90	154	760	703	360	3 (incl. 2 side cutters)
Bucket, Digging 40 cm	7323857	Rear	160	130	650	970	400	3 (incl. 2 side cutters)
Bucket, Digging 40 cm	7412055	Rear	160	130	650	970	400	3 (incl. 2 side cutters)
Bucket, Digging 45 cm	7440704	Rear	120	175	760	703	450	4 (incl. 2 side cutters)
Bucket, Digging 60 cm	7323858	Rear	200	176	650	970	600	3 (incl. 2 side cutters)
Bucket, Digging 60 cm	7412056	Rear	200	176	650	970	600	3 (incl. 2 side cutters)
Bucket, Digging 61 cm	7440705	Rear	180	210	760	703	610	4 (incl. 2 side cutters)
Bucket, Digging 77 cm	7445634	Rear	240	246	760	703	770	5 (incl. 2 side cutters)
Bucket, Digging 80 cm	7323859	Rear	280	235	650	970	800	3 (incl. 2 side cutters)
Bucket, Digging 80 cm	7412057	Rear	280	235	650	970	800	3 (incl. 2 side cutters)
Bucket, Digging 82 cm	7443762	Rear	260	260	760	703	820	5 (incl. 2 side cutters)
Bucket, Digging 93 cm	7451828	Rear	300	280	760	703	925	5 (incl. 2 side cutters)

COMPATIBILITY CHARTS				
			Backhoe Loaders	
Description	Part Number	B730R	В730М	B780
Bucket, Digging 26 cm	7434558		X	
Bucket, Digging 30 cm	7323856			X
Bucket, Digging 30 cm	7412054	X		
Bucket, Digging 36 cm	7434562		X	
Bucket, Digging 40 cm	7323857			X
Bucket, Digging 40 cm	7412055	Х		
Bucket, Digging 45 cm	7440704		X	
Bucket, Digging 60 cm	7323858			Х
Bucket, Digging 60 cm	7412056	Х		
Bucket, Digging 61 cm	7440705		Х	
Bucket, Digging 77 cm	7445634		Х	
Bucket, Digging 80 cm	7323859			Х
Bucket, Digging 80 cm	7412057	X		
Bucket, Digging 82 cm	7443762		Х	
Bucket, Digging 93 cm	7451828		X	

BACKHOE LOADERS B4501805-EN (01-25)

BUCKET (GP), GENERAL PURPOSE

PALLET FORKS



Round back design enhances bucket loading and cleanout.
 Low heel makes cutting grade and backdragging easier.


Features & Benefits

- Replaceable cutting edges.
- Parallel to ground feature.
- Side cutting edges give better performance, increases strength and extend bucket life.

Description: General purpose buckets have a good breakout force, flat bottom and small radius edge for grading, back dragging and leveling operations. They are ideal for light duty and medium duty grading and levelling applications as well as material handling.

TECHNICAL SPECIFICATIONS											
Description	Part Number	Front/Rear	Heaped Capacity (I)	Weight (kg)	Height (mm)	Length (mm)	Width (mm)	Number of bolt on teeth			
Bucket, General Purpose 228 cm	7298041	Front	1000	453	1015	815	2280	7			
Bucket, General Purpose 240 cm	7298042	Front	1100	508	1015	815	2400	7			
Bucket, General Purpose 228 cm	7452576	Front	1000	524	1015	815	2280	8			
Bucket, General Purpose 228 cm, with Blade	7452788	Front	1000	600	1000	815	2280	8			
Bucket, General Purpose 228, with Pallet Forks	7452789	Front	1000	722	1000	815	2280	8			
Bucket, General Purpose 228 cm, with Blade & Pallet Forks	7452790	Front	1000	798	1000	815	2280	-			

COMPATIBILITY CHARTS									
			Backhoe Loaders						
Description	Part Number	B730R	B730M	B780					
Bucket, General Purpose 228 cm	7298041	X							
Bucket, General Purpose 240 cm	7298042			Х					
Bucket, General Purpose 228 cm	7452576		X						
Bucket, General Purpose 228 cm, with Blade	7452788		X						
Bucket, General Purpose 228, with Pallet Forks	7452789		X						
Bucket, General Purpose 228 cm, with Blade & Pallet Forks	7452790		Х						

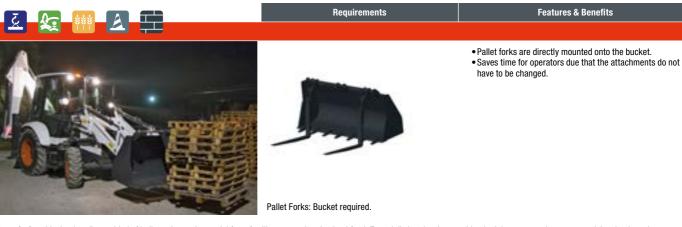

Description: Ideal to handle any kind of bulky or bagged material from fertiliser to seed and animal feed. Especially handy when working in tight areas or along narrow aisles thanks to its maneu-

TECHNICAL SPECIFICATIONS					
Description	Part Number	Fork Width (cm)	Frame Weight (kg)	Max. Lift Capacity (kg)	First Use Installation Time
Pallet Forks Std/Combo	7298035	1100	156	1000	0.25 h
Pallet Fork, B730M	7444748	1100	200	2000	0.25 h

COMPATIBILITY CHARTS									
			Backhoe Loaders						
Description	Part Number	B730R	B730M	B780					
Pallet Forks Std/Combo	7298035	X		X					
Pallet Fork, B730M	7444748		X						

QUICK-COUPLER



Features & Benefits


- Mechanical pin grabber system helping you change attachments.
 Easy bucket hook.
 Made from durable material to have a long operating life.



Description: These quick-couplers allow you to change attachments quickly, easily, and safely. The mechanical coupling system gives you a compact solution to change between many, and secure, attachments safely. Coupler systems turn your backhoe loader into tool-carier machines. Always use the right tool by switching between buckets within minutes, thanks to the easy hook and self-locking system.

TECHNICAL SPECIFICATIONS									
Description	Part Attac Number Di		Pin Center (mm)	Base Width (mm)	Weight (kg)				
Quick-Coupler B730 ®	7469085	45	340,3	158	78				
Quick-Coupler B780	7469084	40	249,2	158	68				

COMPATIBILITY CHARTS	COMPATIBILITY CHARTS									
			Backhoe Loaders							
Description	Part Number	B730R	B730M	B780						
Quick-Coupler B730 ®	7469085	Х								
Quick-Coupler B780	7469084			Х						

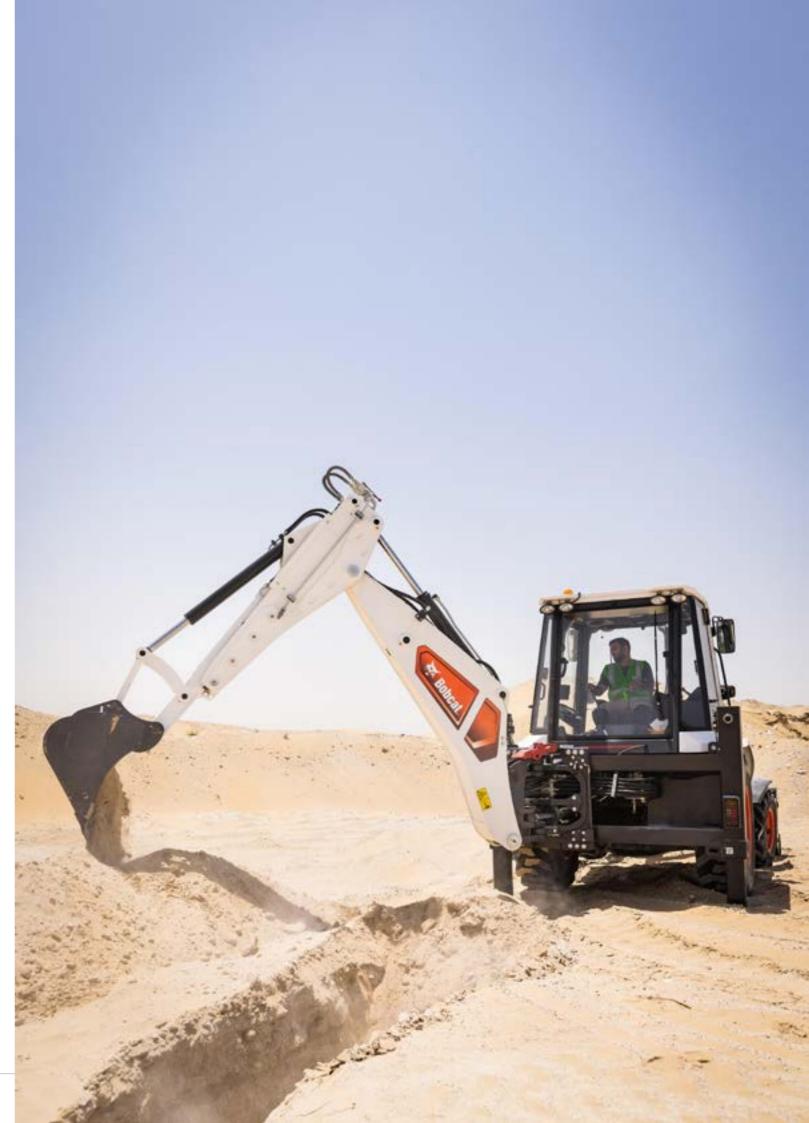



BOBCAT LIGHT COMPACTION EQUIPMENT

We expanded our product portfolio to offer the full range of compact construction machinery:

- Rammers
- ▶ Forward plates
- Reversible plates
- Hydrostatic plates
- Walk-behind rollers
- ▶ Trench rollers
- ▶ Tandem rollers

MORE INFO ON WWW.BOBCAT.COM

USEFUL INFORMATION

THE BOBCAT INSTITUTE

YOUR TRAINING AND DEMO PARTNER







TRAINING TOPICS





Bobcat products Service

incl. competitive testing information







ess Systems

COURSE FORMATS





Instructor-led training



Webinars and virtual classrooms



Web-based

training

Video

COURSE LEVELS







WE CAN OFFER YOU:

- 4 classrooms
- 3 workshops
- 2 roadshow trucks
- ▶ A large demo fleet
- Over 19 000 m² of demo area
- Courses in different languages, locally or in our Dobris training facility

CHECK OUR E-COURSES ON THE DOOSAN BOBCAT LEARNING CENTER:

- Accessible via Doosan Passport
- Available 24/7
- Available usually in 6 languages
- ▶ Also, replay popular webinars





THE BOBCAT INSTITUTE REQUEST YOUR DEMO

THE DEMO TEAM CAN HELP YOU WITH

- ▶ A large demo fleet of Bobcat equipment, including attachments, at your disposal*
- Access to professional Field Product Trainers, for live demonstrations
 - On our large demo area
- At your local site
- Access to Roadshow Trucks, ideal for local events*








Contact the Bobcat Institute for more information



Contact us for more information: bobcatinstitute@doosan.com

THE BOBCAT INSTITUTE

TRAINER'S TIPS AND TRICKS

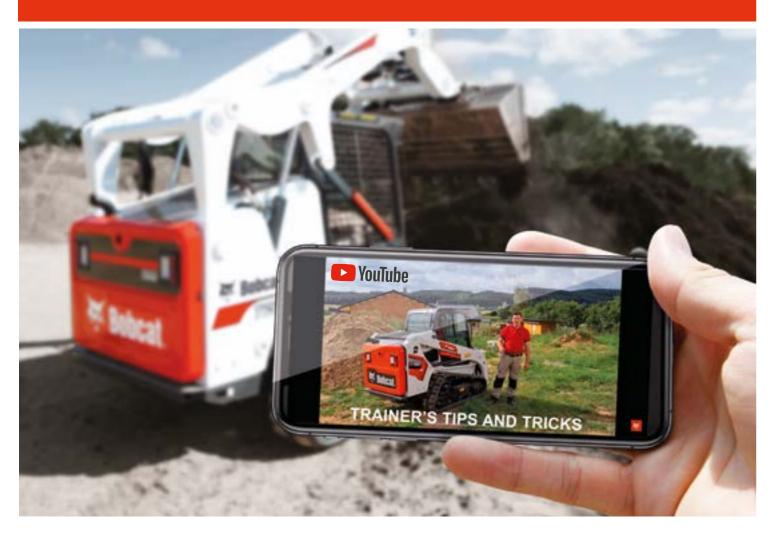

LEARN TIPS AND TRICKS OPERATING YOUR BOBCAT EQUIPMENT FROM THE EXPERTS

- **▶** Check our Bobcat Trainer's Tips & Tricks channel on YouTube
- Available in 6 languages
- Subscribe to our YouTube channel to get new video updates!
- And submit us any topics of interest to you!









BOBCAT DEMO DAYS

DEMO DAYS IS A UNIQUE OPPORTUNITY TO:

- Test all Bobcat equipment in a safe environment with experts at your service
- ▶ Try all Bobcat attachments (forestry, demolition, landscaping, ...)
- Preview new models/options and innovations
- Visit the impressive factory
- Speak with professionals (demonstrators, product managers, district managers, trainers, engineers, ...)
- Learn about other trainings offered by the Bobcat Institute

Location: Bobcat Campus, Dobříš (Prague area), **Czech Republic**













GENUINE **ATTACHMENT PARTS**

TOOLS FOR HYDRAULIC BREAKERS

Bobcat offers a selection of breaker tools, equipping you with the right tool for each job. Select the right tool for the type of rock, concrete or asphalt you need to break.



- Chisels and insertion tools, precisely designed to transmit the energy of the breaker striking mechanism
- The tools are adjusted optimally to their relevant application using a special hardening process
- **Extreme toughness and high** fatigue strength for long service













GENUINE ATTACHMENT PARTS

TYPE SPECIFICATION

	INLIN	INLINE WIDE CHISEL CROSS		CUT WIDE CHISEL	CROSSCU	IT ASPHALT CHISEL	INLINE	ASPHALT CHISEL	TAN	IPING PAD TOOL
Breaker type	Part Number	Dimensions X × Y × Z (mm)	Part Number	Dimensions X × Y × Z (mm)	Part Number	Dimensions X × Y × Z (mm)	Part Number	Dimensions X × Y × Z (mm)	Part Number	Pad dimensions, length, diamater (mm)
HB280										
HB380					7144658	$100\times400\times41.5$	7144657	100×400×41.5		
HB580	7144668	$140\times430\times43.5$	7144667	$140\times430\times43.5$	7144669	115 × 440 × 43.5	7144670	115 × 440 × 43.5	7144672	$200 \times 200, 420, 43.5$
HB680	7144678	$140\times500\times53$	7144677	$140\times500\times53$	7144679	$115 \times 505 \times 53$	7144680	$115 \times 505 \times 53$	7144682	$200 \times 200, 495, 53$
HB880	7144693	150×540×61	7144692	150×540×61	7144694	130×560×61	7144695	130×560×61	7144697	200×200,540,61
HB980	7144704	180×610×68	7144703	180×610×68	7144705	200×655×68	7144706	200×655×68	7144708	200×200,590,68
HB1180	7144715	$150\times645\times76$	7144714	150×645×76	7144716	160×675×76	7144717	160×675×76	7144719	200×200,635,76
HB1380	7163372	$180 \times 740 \times 84$	7163371	$180 \times 740 \times 84$	7163373	180×770×84	7163374	180×770×84		
HB2380	7144725	200 × 800 × 94.65	7144724	200 × 800 × 94.65	7144726	200 × 830 × 94.65	7144727	200×830×94.65		











WIDE POINT

- General use with extra-large width and additional cutting action
- For breaking up blacktop, shaking out foundry ladles and demolishing concrete and reinforced concrete.
- Both parallel to the shank cutting edge and 90° indexed cutting edge available.

ASPHALT POINT


- General use with extra-long, thin blade and additional cutting action.
- For cutting blacktop or soft material.
- Both parallel to the shank cutting edge and 90° indexed cutting edge available.

TAMPING POINT

 Forged 200 × 200 mm plate for compression of ground and gravel.





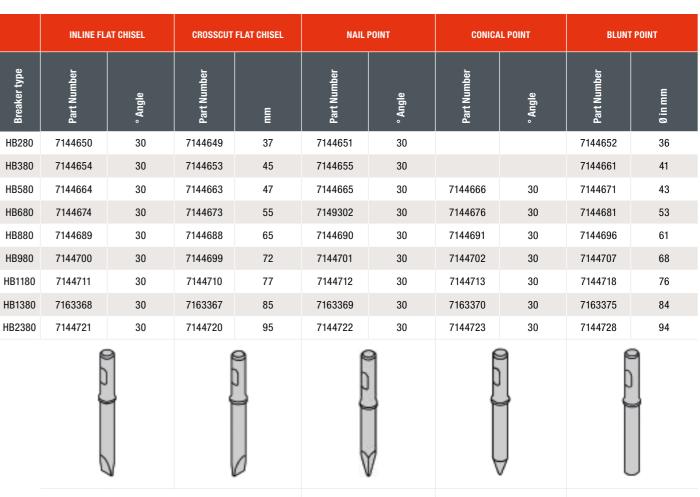

FLAT POINT

- General use with additional cutting action.
- Optimal for drawing pits in rocky subsoil and separating rock slabs.
- Both parallel to the shank cutting edge and 90° indexed cutting edge available.

NAIL POINT

- General use for demolition work and in quarries.
- Ideally suited for breaking up slag in steel mills (industrial application) and demolishing foundations.
 - Roadway drivage and roadway shots in mining.
 - The tip is pyramidally forged for wedge action during application.

CONICAL POINT

 Used for general demolition work where penetrative breaking is required.

BLUNT POINT

- The versatile blunt tool.
- Ideal for breaking stone blocks, for crushing large rock pieces in quarries and for crushing slag.
- Also suitable for ground compression.



B4501805-EN (01-25)

RING BRUSHES AND GUTTER BRUSHES

A wide range of ring brushes & gutter brushes, covering Bobcat and other brand attachments. Efficient sweeping of dirt, dried mud, gravel, light snow and other debris.



- ▶ Extremely durable combination of strands with the inner ring increases the strength of the brush, which allows you to perform extreme work without any loss of strands
- Convoluted or flat design to fit all types of applications
- ▶ Convoluted (zig-zag) ring designed to be used without distance rings – easier installation and no need for spacers

TYPE SPECIFICATION

ANGLE BROOM & SWEEPERS RING BRUSHES												
Fits on	Inner ring/ Brush material	Ring shape	Color	Fill Grammage	Dimensions (mm) Int. Ø × Ext. Ø	Sell QTY	P/N					
	Steel / Poly	Convoluted (zig-zag shape)	Orange		255 × 813	20	6987644PACK					
	Steel / Poly	Flat ring shape	Orange		255 × 813	25	6987643PACK					
Angle broom 68" (173 cm)	Steel / Steel	Convoluted (zig-zag shape)	Wire		255 × 813	20	6672505PACK					
& 84" (213 cm)	Poly / Poly	Convoluted (zig-zag shape)	Orange		255 × 813	20	6988135PACK					
	Poly / Poly	Flat ring shape	Orange		255 × 813	20	6988134PACK					
	Steel / Poly-Steel	Convoluted (zig-zag shape)	Red and wire		255 × 813	25	6989143					
Angle broom 68"	Steel / Poly	Convoluted (zig-zag shape)	Blue	650 g	162 × 543	25	7257970PACK					
S/N 690100101 & above,	Steel / Poly	Convoluted (zig-zag shape)	Orange	500 g	162 × 543	25	6987639PACK					
ndustrial Broom and	Steel / Poly	Flat ring shape	Orange		162 × 543	30	6987640PACK					
Sweepers	Steel / Steel	Convoluted (zig-zag shape)	Wire		162 × 530	25	6648798PACK					
44" (112 cm), 48" (122 cm),	Poly / Poly	Convoluted (zig-zag shape)	Orange		162 × 543	10	6988131PACK					
54" (137 cm), 60" (152 cm),	Poly / Poly	Flat ring shape	Orange		162 × 543	10	6988130PACK					
72" (183 cm)	Steel / Poly-Steel	Convoluted (zig-zag shape)	Red and wire		162 × 543	25	6989142					
Sweeper 44" (112 cm)	Steel / Poly	Flat ring shape	Orange		112 × 420	30	6647969PACK					
************************	Steel / Poly	Flat ring shape	Orange		128 × 550	30	6647970PACK					
weeper 48" (122 cm)	Steel / Steel	Flat ring shape	Wire		128 × 550	30	6649126PACK					
701 (100 am)	Steel / Poly	Flat ring shape	Orange		178 × 600	25	6647971PACK					
weeper 72" (183 cm)	Steel / Steel	Flat ring shape	Wire		178 × 600	30 30	6649127PACK					
	Steel / Poly	Convoluted (zig-zag shape)	Orange		162 × 610	20	6987637PACK					
Sweepers	Steel / Poly	Flat ring shape	Orange		162 × 610	25	6987638PACK					
54" (137 cm), 60" (152 cm),	Steel / Steel	Convoluted (zig-zag shape)	Wire		162 × 610	25	7265139PACK					
72" (183 cm) & 84" (213 cm)	Poly / Poly	Convoluted (zig-zag shape)			162 × 610	10	6988133PACK					
	Steel / Poly-Steel	Convoluted (zig-zag shape)	Red and wire		162 × 610	25	6989145					
Sweepers 110, 140,	Steel / Steel	Flat ring shape	Wire		128 × 550	30	6649126PACK					
155, 185, 215 (cm)	Poly / Poly	Flat ring shape	Yellow		128 × 550	1	7446744					
HD Open Frame	Poly / Poly	Convoluted (zig-zag shape)	Blue		178 × 600	1	7465238					
sweepers	Steel / Poly	Flat ring shape	Orange		178 × 600	25	6647971PACK					
150 and 180 cm	Steel / Steel	Flat ring shape	Wire		178 × 600	25	6649127PACK					
Multipurpose	Steel / Poly	Flat ring shape	Blue		178 × 580	1	7474857					
Sweepers 135, 150, 180 cm	Poly / Poly	Convoluted (zig-zag shape)	Blue and White		178 × 580	1	7474856					
Multipurpose	Steel / Poly	Flat ring shape	Blue		178 × 660	1	7474723					
Sweepers 200, 230, 260 cm	Poly / Poly	Convoluted (zig-zag shape)	Blue and White		178 × 660	1	7474722					



GET MORE OUT OF YOUR ATTACHMENTS

Try the 50% polypropylene and 50% steel bristles combination on Bobcat Sweepers 110, 140, 155, 185 and 215 models to make sure you get the most out of your attachment.

GENUINE ATTACHMENT PARTS
B4501805-EN (01-25)

RING BRUSHES MATERIALS

Our Bobcat bristles offer more hours between changes, so you get more done without spending more. Durable and long-lasting Bobcat skid steer loader broom bristles for your sweeper or broom ensure you get your sweeping jobs done right the first time, every time. Our bristles are designed to make quick work of common challenges like gravel, mud, road debris, leaves, snow.



▶ POLYPROPYLENE BRUSH

Polypropylene rings are the most popular and common type. They work well in majority of situations. These lighter brushes are typically selected for less severe conditions (no ice, frozen and packed snow, or compacted dirt). They have the best flick and are used for effectively sweeping asphalt, clay, gravel, light powdery snow, sand, and other road debris. They are not causing undue stress to asphalt on runways or other sensitive surfaces.

- Designed for effective debris removal under normal sweeping conditions (asphalt debris, clay, gravel, light snow, sand and other road debris).
- · Available either with polypropylene or steel inner ring.
- · 2.5-4 mm thick polypropylene brushes, increasing ring longevity.
- Polypropylene inner ring is non-corrosive, suitable for all weather conditions and 100% recyclable.



▶ POLY-STEEL BRUSH

Best of both worlds with poly bristles and wire bristles on one wafer. These ring works in the same way as altering individual poly and steel rings on one attachment described on following page. Get the flicking action of poly bristles combined with the aggressive ability of wire bristles.

- Designed for medium to severe applications.
- Resistant steel inner ring.
- · Ideal for all sweeping conditions.



STEEL INNER RING / STEEL BRUSH

Steel filings add very aggressive cutting action needed for breaking packed material and heavy debris which cannot be simply swept by polypropylene rings – packed snow and mud, or heavy road millings. It is not recommended using wire rings alone. They are typically combined with polypropylene rings on one attachment. See next page for more details.

- · Designed for severe applications.
- · All steel construction.
- · Ideally to be combined with poly bristles.



▶ CONVOLUTED (ZIG-ZAG) SHAPE RINGS

Convoluted rings are designed to be used without the distance rings due to their wavy design. This solution eases the installation and remove the need for using spacers. Although a little more attention is required during fitting. The convoluted design has high and low spots around the ring that need to line up correctly. Each ring is rotated a quarter turn on the rack.



▶ FLAT SHAPE RINGS

Flat rings are typically used with spacers fitted in between each — ring, spacer, ring, spacer, and so on. Since they are flat, they do not need to be placed on the rack in any particular order. Naturally they allow fitting more flat rings on the rack, compared to convoluted design. For even denser broom, it is also possible to remove the spacers altogether.

WHY COMBINING BRISTLES MATERIALS?

Tough polypropylene bristles made of heavy-duty materials and steel filings with very aggressive cutting action will provide the best performance needed for breaking packed material and heavy debris which cannot be simply swept by polypropylene rings – packed snow and mud or heavy road millings. This combination provides best of both world – aggressive cutting action of steel and efficient sweeping of polypropylene fillings.


See table with quantities of rings and spacers to order depending on sweeper model.

BOBCAT SWEEPER	TOTAL RINGS QUANTITY	POLYPROPYLENE RINGS (QUANTITY)	SPACERS (QUANTITY)	STEEL RINGS (QUANTITY)
		P/N 7446744	P/N 7446759	P/N 6649126PACK
Sweeper 110	25	13	23	12
Sweeper 140	32	17	29	15
Sweeper 155	36	19	33	17
Sweeper 185	43	22	40	21
Sweeper 215	48	25	47	23

POLY 50% / STEEL 50% AXLE CONFIGURATION

See how the starting and finishing assemblies should be on 50% poly / 50% steel axle configuration

Note: this principle combining poly and steel bristles is not exclusive to 110, 140, 155, 185 and 215 models and can be used also on previous Bobcat sweepers.

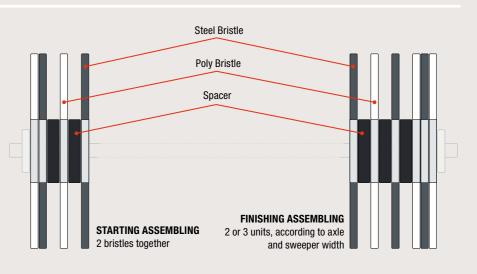

GUTTER BRUSHES

FITS ON	HEAD / BRUSH MATERIAL	SELL QTY	PART NUMBER	
Side Brush 44", 48", 79"	Steel / Poly	1	6683343	
Closed Broom Side Brush	Poly / Poly	1	6692096	
		1	6690814	
Telescopics side sweeper	Steel / Poly	1	6690896	
		1	6690897	
Sweeper (Gutter Brush)	Poly / Steel	1	7023270	
54", 60", 72", 84"	Poly / Poly	1	6989026	
Sweepers 110", 140", 155", 185", 215"	Poly / Poly-steel	1	7450705	
HD Open Frame sweepers 150 and 180 cm				
Multipurpose Sweepers 135, 150, 180, 200, 230, 260 cm	Poly / Poly	1	7465298	





ROAD REHABILITATION TOOLS AND TOOL HOLDERS

GRINDING, MILLING AND CUTTING ASPHALT, CONCRETE AND ROCKS ARE TOUGH JOBS REQUIRING THE RIGHT TOOLS. WE OFFER A SELECTION OF BOBCAT CARBIDE BITS FOR PLANER AND WHEEL SAW ATTACHMENTS.

- ▶ Cemented tungsten carbide for exceptional wear resistance, air-hardened steel for toughness
- ▶ Latest body design for optimum penetration and rotation with washer for less stress and wear of retainer and holder system
- ▶ Tips designed to best match your application









HOW TO REPLACE BITS SAFELY

- 1. Wear approved personal protective equipment: eye and ear protection, steel toe cap shoes, protective helmet, gloves, and a vest.
- 2. Do not change tools when the cutting chain, drum or wheel is moving or still engaged.
- 3. Allow the attachment to cool down and always wear protective gloves to inspect or touch bits and conicals.
- 4. Exercise care when removing tools.
- **5.** Make sure tools are properly seated and securely retained.
- 6. Inspect tools daily. Do not use dull, cracked, burred or bent tools.



GENUINE ATTACHMENT PARTS

B4501805-EN (01-25)

Attachment	Optimal application	Shank Diameter	Cutting Performance	PN	Quantity per box	Description	Drawing
Wheel Saw Planer	Asphalt	20 mm 0.76"	Premium	7338747 or 7029624	Sold individually	Long and wide blunt cap shaped carbide tip for longer life and high fracture resistance. For all types of asphalt and low density abrasive material. Washer to provide block protection and extractor grove easing bit removal during change.	
			Standard	7356716	75 pieces	Cost effective version of Bobcat's asphalt bit for all types of asphalt and low density abrasive material. Washer providing block protection and extractor grove for easy removal.	
	Concrete, Rock – WS Paint Removal	20 mm 0.76"	Premium	7010631 or 7285499	Sold individually	Cylindrical shaped plug carbide tip for high impact and high density materials applications. Deeply recessed carbide for longer life. Washer to provide block protection and extractor grove easing bit removal during change. Large 12 mm diameter carbide tip for longer life, high penetration and maximum productivity.	
	- Planer Heavy Duty		Standard	7370901	50 pieces	Cost effective version of Bobcat's concrete, rock bit for high impact and high density materials applications. Washer providing block protection and extractor grove for easy removal.	
	Concrete, Rock – WS	20 mm 0.76"	Premium	7338748	Sold individually	Cylindrical shaped plug carbide tip for high impact and high density materials applications. Deeply recessed carbide for longer life. Washer to provide block protection and extractor grove easing bit removal during change. Slightly smaller diameter tip compared to 7010631 reduces tool price.	
	Paint Removal – Planer		Standard	7439169	50 pieces	Cost effective version of Bobcat's smaller diameter tip bit for concrete, rock and high density materials applications. Washer providing block protection and extractor grove for easy removal.	
Wheel Saw – narrower width Planer – finishing drum	Concrete, Rock – WS Paint Removal – Planer	13 mm	Premium	7024421	Sold individually	Standard bit from the factory for planers with finishing drum, also used for some narrower width wheel saws. Smaller in size than normal planer / WS bits. For drilling in medium to hard conditions, high impact & abrasive applications. Flanged carbide tip for increased wear resistance in abrasive cutting.	
			Standard	7439170	300 pieces	Cost effective version of Bobcat's 13 mm bit for planer finishing drum, also used for some narrower width wheel saws.	
40 cm (16") Surface planer	Designed for removing paint from roads	14 mm 0.55"	Premium	6906904	Sold individually	Standard bit from the factory for 40 cm (16") surface planer using 14 mm bit shank diameter. Highest density of smaller bits on the surface planer drum is designed for removing paint from roads.	1
Wheel Saw	Heavy Duty Concrete, Rock		Premium	7339841	Sold individually	Best bit for hard concrete with large aggregate or steel rebar. For drilling concrete and rock cutting. Supersized 15 mm diameter narrow bottom tip for maximum impact strength and tool life. Bit for those applications, where standard bits work their way out of the holders. Body with extractor grove easing bit removal during change.	
			Standard	7439171	70 pieces	Cost effective version of Bobcat's bit with narrow bottom carbide tip for concrete, rock and other heavy duty application.	



Use Bobcat **6678073**, **6678074** tools for extracting worn bits from attachment when they need to be replaced.



6678073Bit removal hammer puller



6678074Bit removal hammer punch



HOLDERS FOR PLANNER AND WHEEL SAW BITS							
Description	Drawing	Bit Shank Diameter	Premium PN	Quantity per box	Standard PN	Quantity per box	
Planer Holder for 13 mm bits		13 mm 0.5"	7338759	Sold individually	-	-	
Wheel Saw (80 mm wheel) WS18, WS24 Holder for 13 mm bits	8	13 mm 0.5"	6685551	Sold individually	-	-	
Holder for 14 mm bits		14 mm 0.55"	6906906	Sold individually	7439167	200 pieces	
Holder for 20 mm bits		20 mm 0.76"	7311788	Sold individually	7439168	50 pieces	



B4501805-EN (01-25)

FLAIL MOWER CUTTING TOOL KITS

Bobcat Self-Leveling Flail Mower Attachments are powerful tools designed for clearing uneven ground and difficult terrain of long grass and overgrown vegetation. When it is time to replace worn-out cutting tools, rely on Bobcat knife or hammer kits, which contain all you need for complete replacement.

GENUINE ATTACHMENT PARTS

- ► KITS CONTAIN ALL CUTTING PARTS AND MOUNTING HARDWARE FOR COMPLETE DRUM REBUILD.
- TWO TOOL TYPE OPTIONS FOR DIFFERENT APPLICATIONS AVAILABLE.



CUTTING TOOL TYPES

- Knives great for cutting tall weeds and overgrown vegetation.
- Hammers usually used for tougher vegetation and heavier applications requiring more punch, for instance cutting saplings and denser overgrowth.

SL 60 FLAIL MOWER

is equipped with 32 knives as standard and is not compatible with hammers.

SL 85 FLAIL MOWER

can be equipped with either knives or hammers.




FLAIL MOWER	TOOL TYPE	KIT PART NUMBER	KIT CONTENTS	APPLICATION	PICTURE
SL FM 60	Knives	7396026	16-knife set including mounting hardware	Tall weeds Overgrown vegetation	

FLAIL MOWER	TOOL TYPE	KIT PART NUMBER	KIT CONTENTS	APPLICATION	PICTURE
SL FM 85	Knives	7396027	12-knife set including mounting hardware	Tall weeds Overgrown vegetation	
	Hammers	7396028	12-hammer set including mounting hardware	Saplings Denser overgrowth	OF SOOO
SL FM 105	Knives	7396029	16-knife set including mounting hardware	Tall weeds Overgrown vegetation	
SLFI	Hammers	7396030	16-hammer set including mounting hardware	Saplings Denser overgrowth	ON THE REAL PROPERTY OF THE PARTY OF THE PAR


PICTURE INDEX

Supercharger P. 60

ATTACHMENTS FOR COMPACT EXCAVATORS

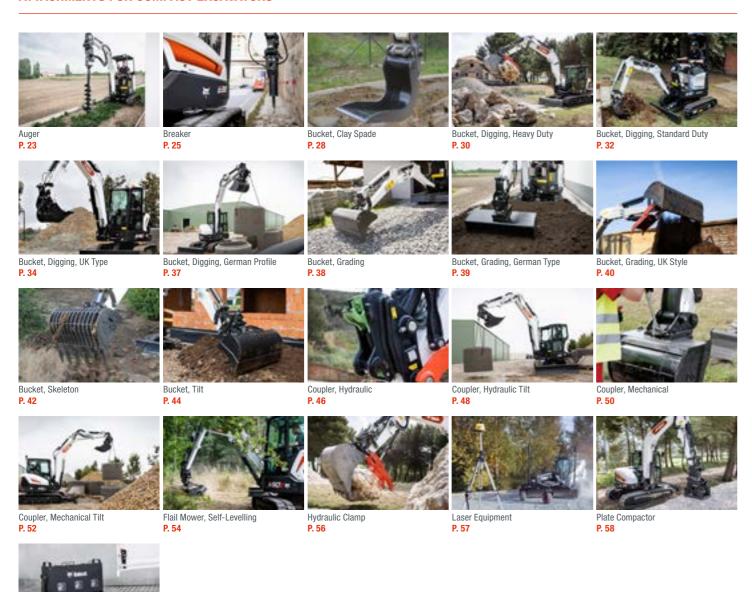

ATTACHMENTS FOR COMPACT LOADERS

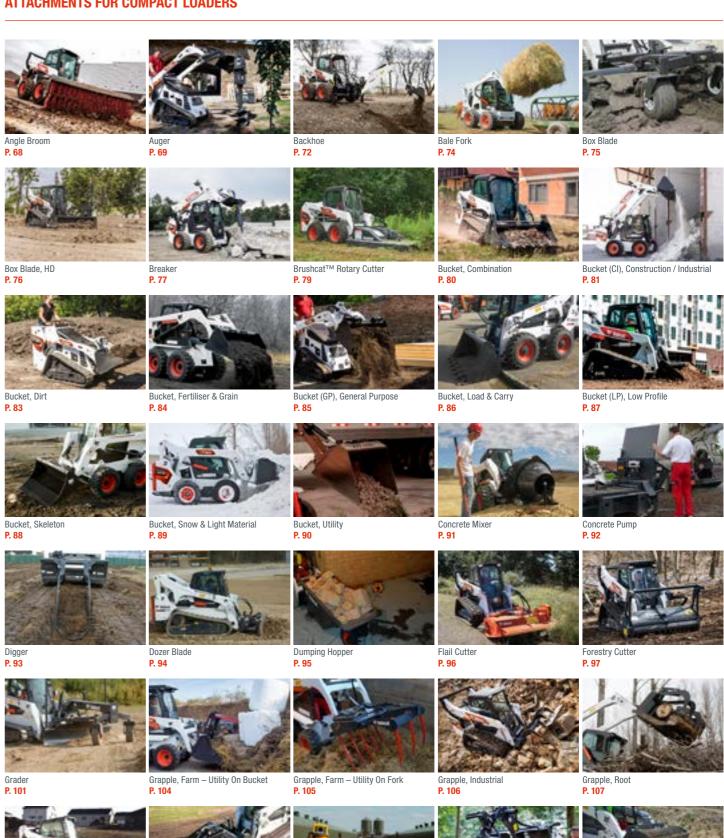

Laser Equipment P. 110

Log Grapple P. 113


Mixing Bucket P. 114

341 340

Landplane P. 108

Landscape Rake P. 109


ATTACHMENTS FOR SMALL ARTICULATED LOADERS

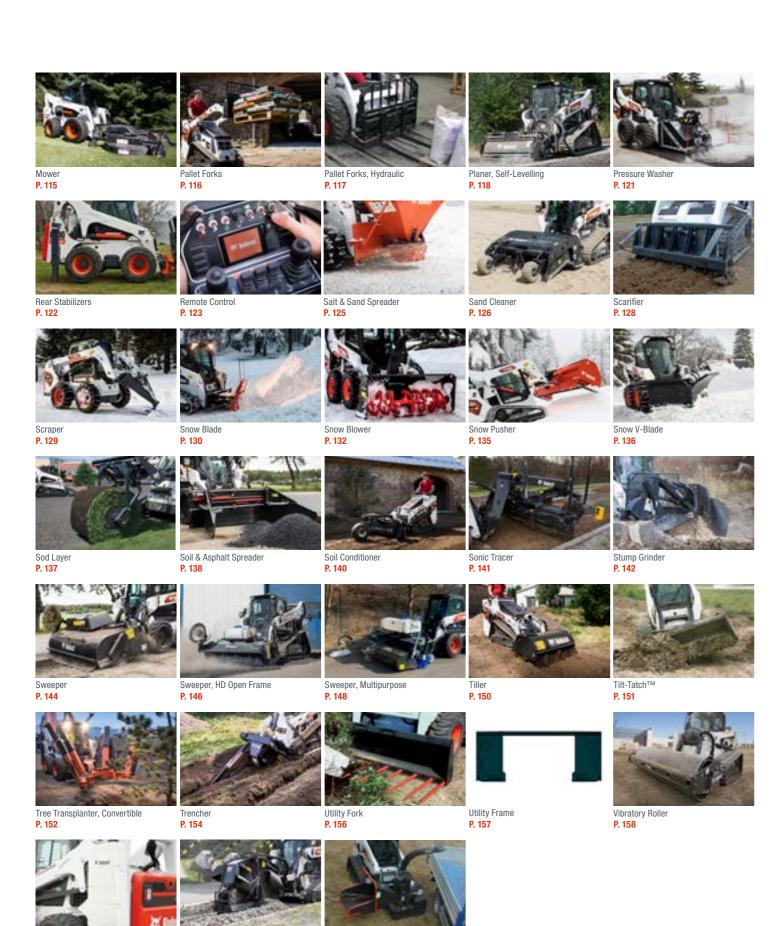

Wood Chipper P. 163


Water Kit

Wheel Saw P. 160

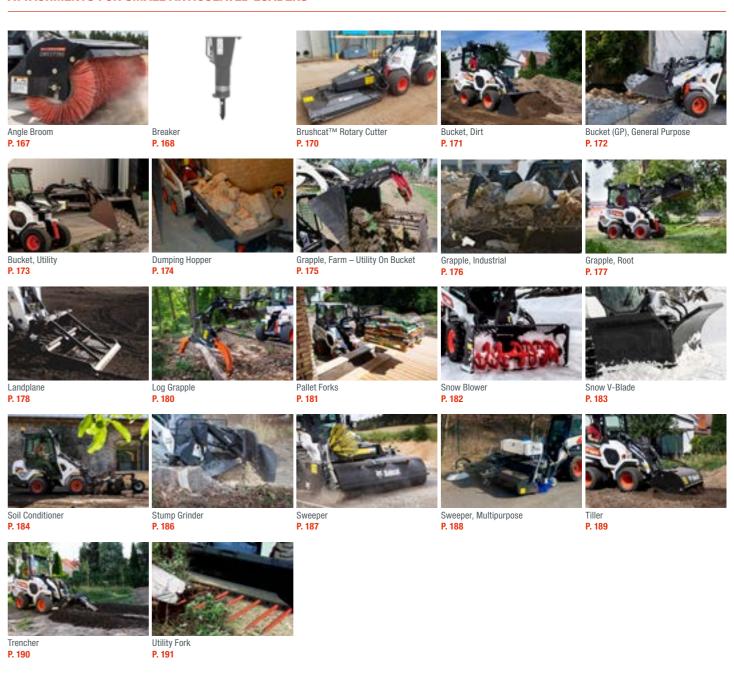


342 343


ATTACHMENTS FOR COMPACT WHEEL LOADERS

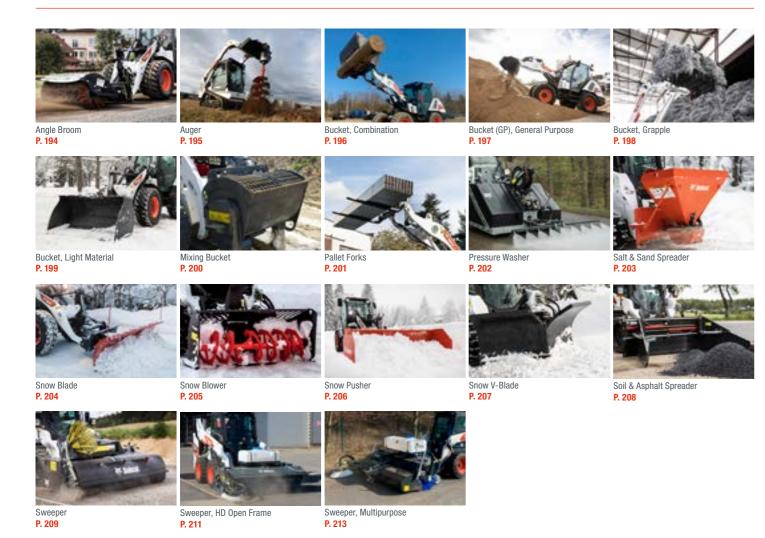

ATTACHMENTS FOR COMPACT TRACTORS

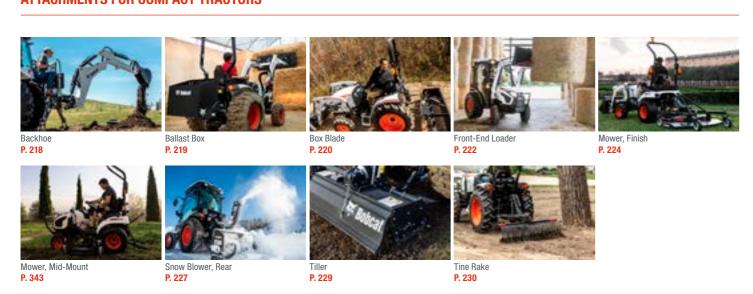

ATTACHMENTS FOR TELEHANDLERS

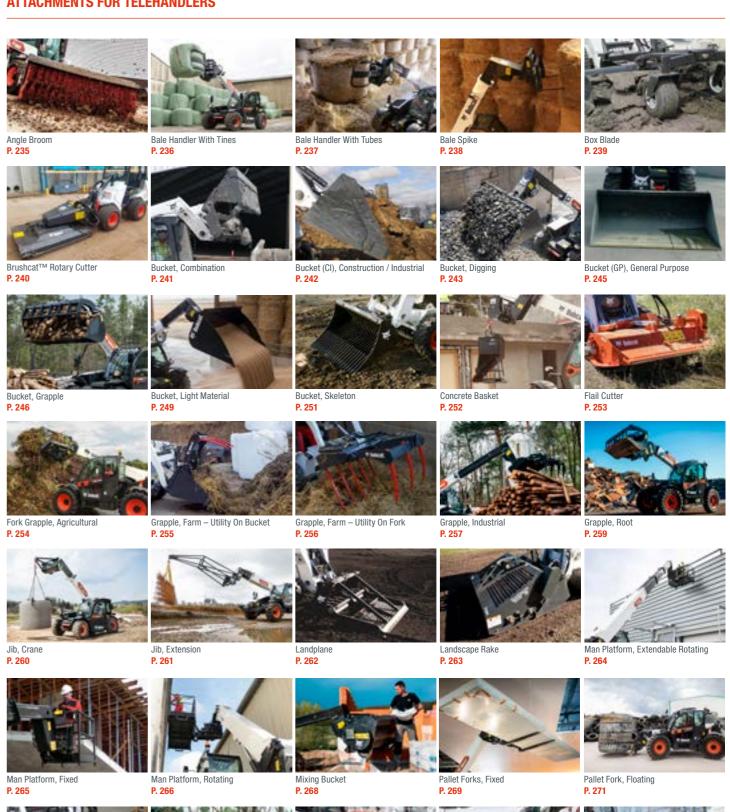

Snow Blade

P. 275

Snow Pusher

P. 276

Salt & Sand Spreader

P. 274

Pallet Forks, Hydraulic

P. 272

Pressure Washer P. 273



Winch **P. 286**







Sweeper, HD Open Frame P. 280

Winch, Jib P. 287

Sweeper, Multipurpose P. 282

Bucket, Waste P. 292 Bucket, General purpose P. 291

ATTACHMENTS FOR ROTARY TELEHANDLERS









Jib, Crane P. 294














Jib, Extension, With Winch P. 296

Man Platform, Expandable P. 297

P. 298

Man Platform, Fixed, Telescopic P. 300

Man Platform, Positive / Negative Telescopic P. 301













Man Platform, Rigid P. 302

Pallet Forks, Floating P. 304

Pallet Forks, Rigid P. 305

Pallet Forks, Rotating P. 306

Rib Handler P. 307



Winch **P. 308**

ATTACHMENTS FOR BACKHOE LOADERS











Bucket, Combination P. 313 Bucket, Digging P. 315

Quick-Coupler P. 318

347

INDEX

Grapple, Farm - Utility on Fork Bucket. Waste Man Platform, Fixed **Bucket, Digging** Q for Backhoe Loaders 315 for Rotary Telehandlers 292 Quick-Coupler **Angle Broom** for Compact Loaders 105 for Telehandlers 265 for Telehandlers 243 for Telehandlers 256 for Compact Loaders 68 Man Platform, Fixed, Telescopic for Backhoe Loaders 318 for Compact Wheel Loaders 194 **Bucket, Digging, German Profile Grapple, Industrial** for Rotary Telehandlers 300 C Man Platform. Positive/Negative Telfor Small Articulated Loaders 167 for Compact Excavators 37 for Compact Loaders 106 **Concrete Basket** for Telehandlers 235 **Bucket, Digging, Heavy Duty** for Small Articulated Loaders 176 escopic **Rear Stabilizers** for Rotary Telehandlers 293 for Compact Excavators 30 for Telehandlers 257 for Rotary Telehandlers 302 Auger for Compact Loaders 122 for Telehandlers 252 for Compact Excavators 23 **Bucket, Digging, Standard Duty** Grapple, Root Man Platform, Rigid **Remote Control Concrete Mixer** for Rotary Telehandlers 302 for Compact Loaders 69 for Compact Excavators 32 for Compact Loaders 107 for Compact Loaders 123 for Compact Loaders 91 for Compact Wheel Loaders 195 for Small Articulated Loaders 177 Man Platform, Rotating **Bucket, Digging, UK Type Rib Handler Concrete Pump** for Compact Excavators 34 for Telehandlers 259 for Telehandlers 266 for Rotary Telehandlers 307 for Compact Loaders 92 **Bucket. Dirt** Mixing Bucket Coupler, Hydraulic for Compact Loaders 83 for Compact Loaders 114 **Backhoe** for Compact Excavators 46 for Small Articulated Loaders 171 for Compact Wheel Loaders 200 for Compact Loaders 72 Coupler, Hydraulic, Tilt **Hydraulic Clamp Salt & Sand Spreader** for Telehandlers 268 **Bucket. Fertiliser and Grain** for Compact Tractors 218 for Compact Excavators 48 for Compact Excavators 56 for Compact Loaders 125 for Compact Loaders 84 Mower **Bale Fork** Coupler, Mechanical for Compact Wheel Loaders 203 **Bucket, General Purpose** for Compact Loaders 115 for Compact Loaders 74 for Compact Excavators 50 for Telehandlers 274 for Rotary Telehandlers 291 Mower, Finish **Bale Handler with Tines** Coupler, Mechanical, Tilt **Sand Cleaner** Jib, Crane **Bucket, General Purpose (GP)** for Compact Tractors 224 for Telehandlers 236 for Compact Excavators 52 for Compact Loaders 126 for Backhoe Loaders 316 for Rotary Telehandlers 294 Mower. Mid-Mount **Bale Handler with Tubes** Scarifier for Compact Loaders 85 for Telehandlers 260 for Compact Tractors 226 for Telehandlers 237 for Compact Loaders 128 for Compact Wheel Loaders 197 Jib. Extension **Bale Spike** Scraper for Small Articulated Loaders 172 for Rotary Telehandlers 295 Digger for Telehandlers 238 for Compact Loaders 129 for Telehandlers 245 for Telehandlers 261 for Compact Loaders 93 Pallet Fork **Ballast Box Snow Blade Bucket. Grading** Jib, Extension, with Winch **Dozer Blade** for Compact Wheel Loaders 201 for Compact Tractors 219 for Compact Loaders 130 for Rotary Telehandlers 296 for Compact Excavators 38 for Compact Loaders 94 **Pallet Fork, Floating Box Blade** for Compact Wheel Loaders 204 **Bucket, Grading, German Type Dumping Hopper** for Rotary Telehandlers 304 for Compact Loaders 75 for Telehandlers 275 for Compact Excavators 39 for Compact Loaders 95 for Telehandlers 271 for Compact Tractors 220 **Snow Blower Bucket, Grading, UK Style** for Small Articulated Loaders 174 Landplane Pallet Fork, Rigid for Telehandlers 239 for Compact Loaders 132 for Compact Excavators 40 for Compact Loaders 108 for Rotary Telehandlers 305 Box Blade, HD for Compact Wheel Loaders 205 **Bucket, Grapple** for Small Articulated Loaders 178 Pallet Fork, Rotating for Compact Loaders 76 for Small Articulated Loaders 182 for Telehandlers 246 for Telehandlers 262 for Rotary Telehandlers 306 **Breaker Snow Blower, Rear Bucket, Light Material** Flail Cutter Landscape Rake for Backhoe Loaders 312 **Pallet Forks** for Compact Tractors 227 for Compact Loaders 96 for Compact Wheel Loaders 199 for Compact Loaders 109 for Backhoe Loaders 317 for Compact Excavators 25 **Snow Pusher** for Telehandlers 253 for Telehandlers 249 for Telehandlers 263 for Compact Loaders 77 for Compact Loaders 116 for Compact Loaders 135 Flail Mower, Self-Levelling **Bucket, Load & Carry Laser Equipment** for Small Articulated Loaders 181 for Small Articulated Loaders 168 for Compact Wheel Loaders 206 for Compact Excavators 54 for Compact Loaders 86 for Compact Excavators 57 Brushcat™ Rotary Cutter Pallet Forks, Fixed for Telehandlers 276 **Bucket, Low Profile (LP) Forestry Cutter** for Compact Loaders 110 for Telehandlers 269 for Compact Loaders 79 **Snow V-Blade** for Compact Loaders 97 for Compact Loaders 87 **Light Compaction Equipment 320** Pallet Forks, Hydraulic for Small Articulated Loaders 170 for Compact Loaders 136 Fork Grapple, Agricultural **Bucket. Skeleton** Log Grapple for Compact Loaders 117 for Telehandlers 240 for Compact Wheel Loaders 207 for Telehandlers 254 for Compact Excavators 42 for Compact Loaders 113 for Telehandlers 272 **Bucket. Clay Spade** for Small Articulated Loaders 183 for Compact Loaders 88 Front-End Loader for Small Articulated Loaders 180 Pin Kits 22 for Compact Excavators 28 for Telehandlers 277 for Compact Tractors 222 for Telehandlers 251 Planer, Self-Levelling **Bucket, Combination Sod Layer Bucket, Snow and Light Material** for Compact Loaders 118 for Backhoe Loaders 313 for Compact Loaders 137 for Compact Loaders 89 G **Plate Compactor** for Compact Loaders 80 Man Platform, Expandable **Soil and Asphalt Spreader Bucket Teeth 20** Grader for Compact Excavators 58 for Compact Wheel Loaders 196 for Rotary Telehandlers 297 for Compact Loaders 138 **Bucket, Tilt** for Compact Loaders 101 **Pressure Washer** for Telehandlers 241 Man Platform, Expandable, Roofing for Compact Wheel Loaders 208 for Compact Excavators 44 **Grapple, Farm - Utility on Bucket** for Compact Loaders 121 **Bucket, Construction / Industrial (CI)** for Rotary Telehandlers 298 **Soil Conditioner Bucket. Utility** for Compact Loaders 104 for Compact Wheel Loaders 202 for Compact Loaders 81 Man Platform, Extendable Rotating for Compact Loaders 140 for Compact Loaders 90 for Small Articulated Loaders 175 for Telehandlers 273 for Telehandlers 242 for Telehandlers 264 for Small Articulated Loaders 184

348 349

for Telehandlers 255

for Small Articulated Loaders 173

INDEX

Sonic Tracer

for Compact Loaders 141

Stump Grinder

for Compact Loaders 142 for Small Articulated Loaders 186

Supercharger

for Compact Excavators 60

Sweeper

for Compact Loaders 144 for Compact Wheel Loaders 209 for Small Articulated Loaders 187 for Telehandlers 278

Sweeper, HD Open Frame

for Compact Loaders 146 for Compact Wheel Loaders 211 for Telehandlers 280

Sweeper, Multipurpose

for Compact Loaders 148 for Compact Wheel Loaders 213 for Small Articulated Loaders 188 for Telehandlers 282

<u>.</u>

Tiller

for Compact Loaders 150 for Compact Tractor 229 for Small Articulated Loaders 189 for Telehandlers 284

Tilt-Tatch™

for Compact Loaders 151

Tine Rake

for Compact Tractors 230

Tree Transplanter, Convertible

for Compact Loaders 152

Trencher

for Compact Loaders 154 for Small Articulated Loaders 190 for Telehandlers 285

U

Utility Fork

for Compact Loaders 156 for Small Articulated Loaders 191

Utility Frame

for Compact Loaders 157

V

Vibratory Roller

for Compact Loaders 158

W

Water Kit

for Compact Loaders 159

Wheel Saw

for Compact Loaders 160

Winch

for Rotary Telehandlers 308 for Telehandlers 286

Winch, Jib

for Telehandlers 287

Wood Chipper

for Compact Loaders 163

350 351



150 ATTACHMENT FAMILIES 110 MACHINES 1 TOUGH ANIMAL














ROTARY TELEHANDLERS













SMALL ARTICULATED LOADERS



MINI TRACK LOADER



MOWERS



COMPACT TRACTORS

Bobcat



Bobcat is a Doosan Company.

Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. I Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2025 Bobcat Company. All Rights Reserved.

Certain specifications are based on engineering calculations and are not actual measurements. Specifications are provided for comparison purposes only and are subject to change without notice. Specifications for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.